

## Suction and low-pressure fittings Ferrules 117G

### Application



fitting type dh1000 fittings up to DN63, DH17 ab DN76  
14A / 17A flexible tubes

### Material

Steel

### Surface protection

Zinc-electroplated

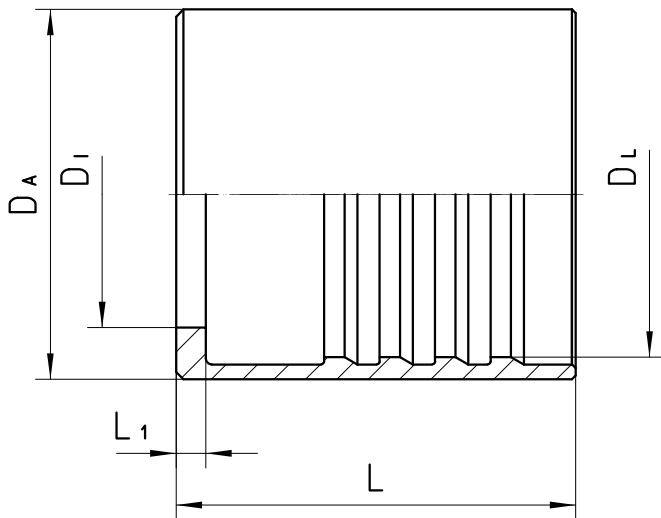

Bestell-Nr.	DN in mm	DA in mm	DI in mm	DL in mm	L in mm	L1 in mm
117G-12	19	36,0	25,0	31,0	42,5	3,0

<b>117G-16</b>	25	42,0	30,3	37,0	46,0	3,8
<b>117G-20</b>	31	50,0	38,0	44,0	54,0	4,0
<b>117G-24</b>	38	56,5	43,9	51,0	57,0	4,1
<b>117G-28</b>	45	65,0	51,5	58,5	57,0	4,3
<b>117G-32</b>	51	70,0	59,5	65,0	74,0	4,5
<b>117G-36</b>	60	82,0	69,3	75,0	75,0	4,8
<b>117G-40</b>	63	84,0	73,0	78,0	81,0	4,8
<b>117G-48</b>	76	100,5	81,0	93,3	88,0	4,0
<b>117G-56</b>	90	114,3	93,1	107,1	96,0	4,0
<b>117G-64</b>	102	133,0	110,4	124,0	96,0	4,0
<b>117G-80</b>	127	158,0	134,6	150,0	99,0	5,0
<b>117G-96</b>	152	189,0	159,0	175,0	131,0	6,0