



Superior Steamshower Systems

Headquarters & Technical Support

1958 Steam Way, Round Rock, TX 78665 – (800) 776-0711

<http://www.thermasol.com>

Speaker Installation Instructions

Speaker specifications

- Impedance, 4 Ohms
- 100Hz ~ 20k Hz response frequency
- 40 Watt Max Input, 20 Watt Rated input

Parts Enclosed:

- 2 – 4” full range speakers
- 8 – # 8 x 1” Mounting screws
- 9.0-10.5 feet speaker wire patch cables




Material Needed:

- 4” hole saw bit (or tile cutting bit)
- Drill
- Phillips screw driver
- Wire strippers
- Other Tools as required

Warning: Ensure that all-existing electrical wiring and plumbing is clear before drilling any holes to mount speakers.

1. "Use drawing below to assist in mounting your ThermaSol speakers.
2. Mark hole centers by using dimensions from drawing below.
3. Follow the notes & dimensions on the drawing below.

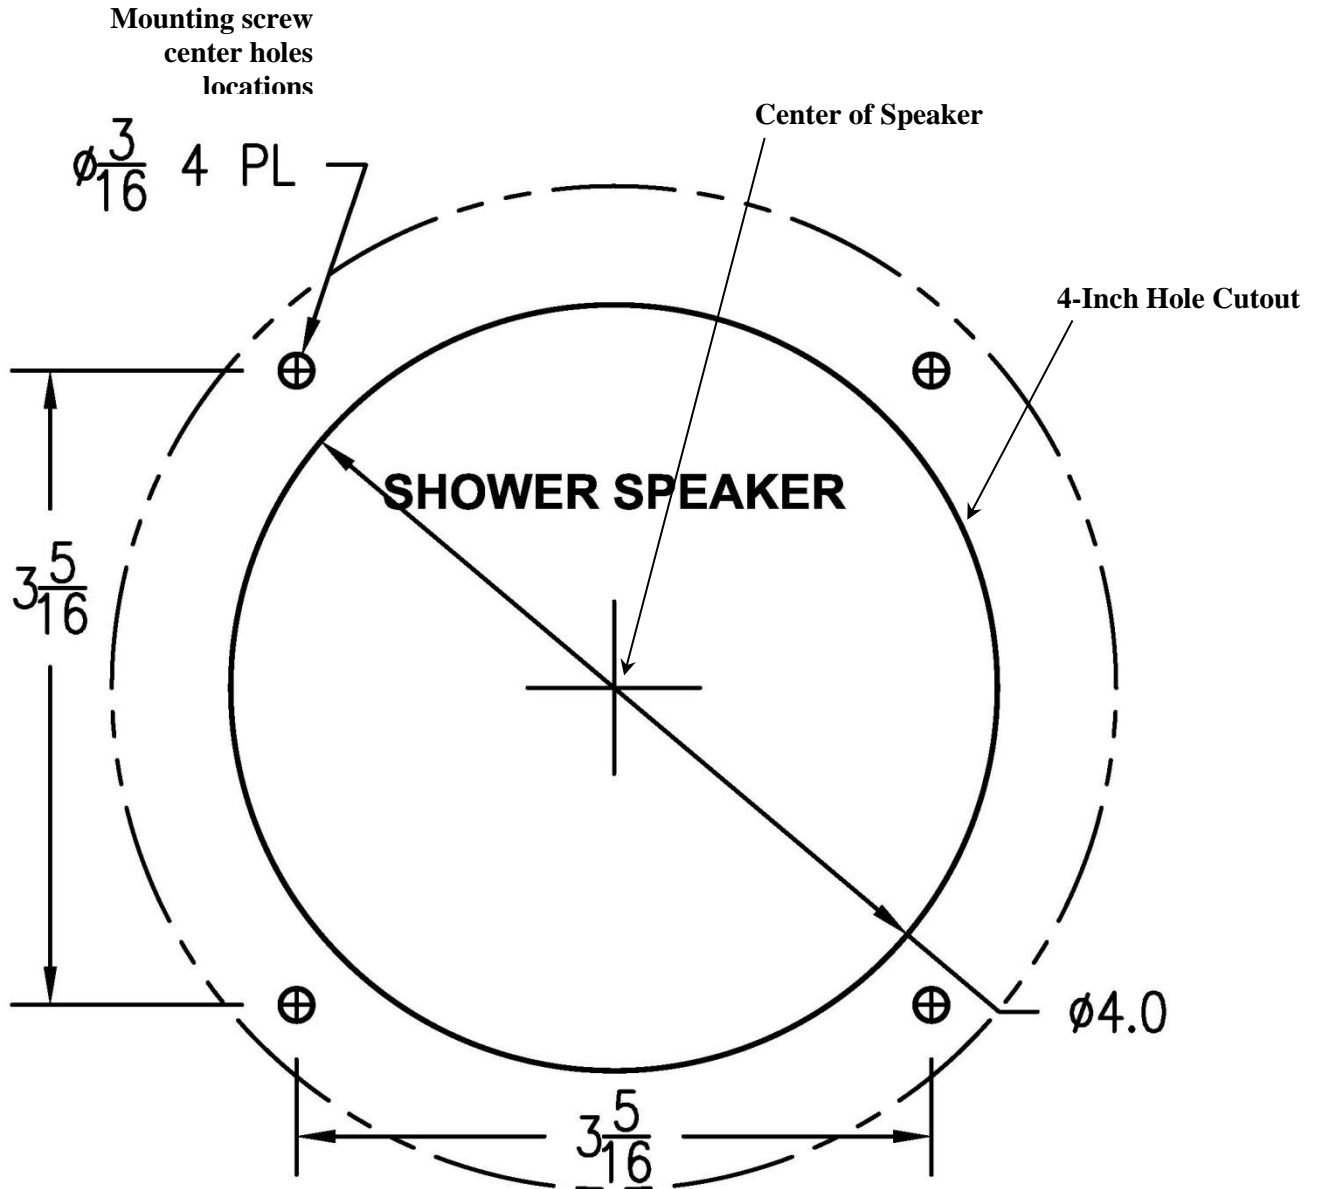

TEMPLATE_REV_C.DWG

**SHOWER SPEAKER DIMENSIONS
NOT TO SCALE**