

SCAN FOR  
INSTALLATION GUIDE



SCAN FOR  
CAD FILES



#### STANDARD EQUIPMENT

- Lifetime at Factory Warranty (Includes parts and labor)
- 2 year in-home warranty followed by lifetime warranty
- Two Way Digital CAN-bus Technology Only from ThermaSol
- Auto PowerFlush™ pressurized inner tank cleaning system
- Superior heating elements - incoloy low watt density
- FastStart™
- 208-240 volt power cord (5 ft.)
- 50' CAN-bus cable for the controller

- Works with ThermaSol Serenity Light, Sound, Rainhead
- Split tank
- Constant steam at a constant rate; no steam lag or burst
- Can be plumbed 50 ft. from the shower without purchasing a larger kW unit
- Stainless steel construction
- PROII Series steam generators services residential rooms up to 1200 cubic ft. with one steam unit

#### INSTALLATION NOTES:

Install this generator according to the supplied installation guide. Follow local plumbing and electrical codes. Unit must be accessible.

Generator is factory sized: L x W x H = Cubic Feet.  
Choose the appropriate generator. For every additional foot of ceiling height over 8 ft, use the next larger generator. Always round up when calculating the total cubic feet.

#### SPECIFICATIONS:




Input Voltage.....	208-240VAC Single Phase
Kilowatt Rating.....	6.0
Maximum Amperage.....	28 AMPS
Water Inlet.....	3/8" NPT
Steam Outlet.....	1/2" NPT
Safety Valve.....	3/4" NPT
Electrical connection.....	NEMA 6-30P
Maximum Room Size (cubic Feet).....	84

#### COMPATIBLE OPTIONS:

- Thermatouch Series
- Signatouch Series
- Microtouch Series
- Signature Control Series
- Easy Start Series
- Wellness Packages
- Digital Shower Packages
- Serenity Light and Music series
- Hydrovive series

# PRO SERIES

## ADVANCED

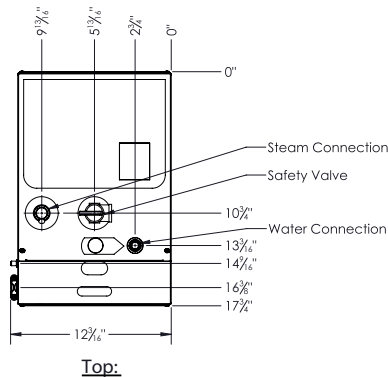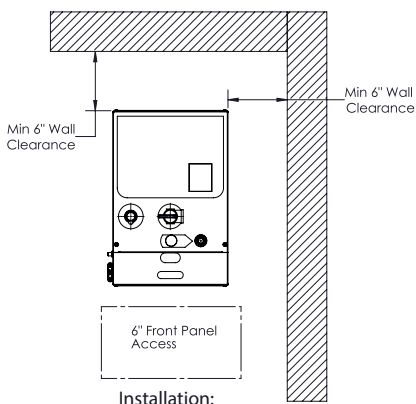

#### SHIPPING DETAILS

Weight | 37 lbs.

Length | 22 in.

Width | 18 in.

Height | 14 in.

