

# 9100E-SP

## Mortise Escape-Lock with Anti-thrust latch for single-leaf fire-rated doors

### Premium Class




#### Features

Anti-Panic-function "E"
Anti-thrust latch as mechanical latchbolt blocking mechanism
Prepared for euro-profile-cylinder
With transmission bar
Handed (left hand / right hand to be specified)
Centre distance 72 mm, backset 55 mm (60, 65, 70 and 80 mm)
Bushed TENAX clamp follower 8 mm, sintered steel
Forend 24 (20) x 235 mm, flush (rebated) doors, edged or rounded, satin stainless steel, stainless steel 1.4301 (AISI 304)
Lock case galvanized and blue lacquered
Triple latchbolt sintered steel, nickel-plated
Solid deadbolt steel, nickel-plated, single throw (20 mm)
Strike plate 0522, edged or rounded, satin stainless steel, non-handed
Screws included

#### Classification

EN 179	3 7 7 B 1 3 5 2 A B
EN 12209	3 X 8 1 0 G 2 B A 3 0
CE marked	Approved product, certificate no. 0432-CPR-00292-01, 0432-CPR-00292-02
Certifire	Approved product, certificate no. CF 5418
Fire safety	Successful fire test to BS EN 1634-1 Timber door 30, 60, 90 and 120 minutes Steel door 30, 60, 90, 120 and 240 minutes

 **certifire** is a registered trademark of EXOVA WARRINGTON

#### Intumescent lock pack (not included in delivery)

<b>required</b>	For use on 60, 90, 120 minutes timber fire doors
<b>not required</b>	For use on 30 minutes timber fire doors and steel fire doors


CPR Declaration of Performance available for download on [www.ces.eu/en](http://www.ces.eu/en)

Subject to changes without notice. V11/18



Article number  
0522

Article number  
9100E-SP

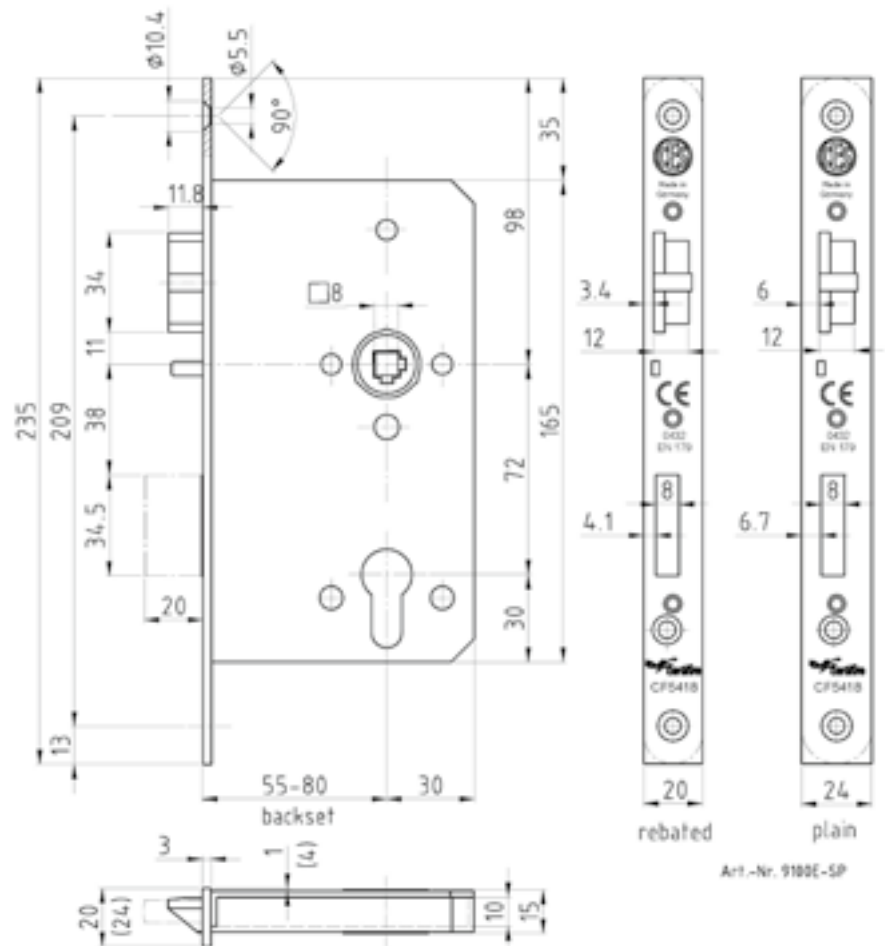

Art.-Nr. 9100E-SP