




The wall-mounted I-ON charging stations are the JOINON solutions for public and semi-public access, designed for charging electric vehicles and to withstand any wear including impacts, stress, vandalism and atmospheric agents. They are the first and only on the market guaranteed with a IP55 protection rating. The special design allows the units to be adapted into any urban context and parking configuration, with a targeted focus on the user experience of drivers. They are available with standard JoinOn graphics, which may be customised on request.

INPUT		- Socket/Connector Nr. (Type)		2 (Type 2 socket, with shutters)	
Terminal blocks	2 x (5 x 10 mm ²)	Charging activation			Free access
Current nominal	64 A	Human Interface			LED RGB and TFT Display
Total power	44 Kilowatt	Connectivity			Nu
OUTPUT		- MECHANICAL FACTS			
Tensiune nominală	400 V	Mounting and installation			Wall mount
Current alimentat (max)	32 A per socket	Culoare			Grey, Headboard RAL 7011
Putere max.	22 kW per socket	Material			Steel sheet
Thermal-magnetic protection	Currently not present	External treatments			Anti-corrosion and anti-graffiti
Tip de protecție diferențială	Currently not present	Clasă de protecție IP			IP55
Contor energie	Currently not present	Cod IK			IK10
DC Leakage check	Currently not present	Temperatură de operare			-25 +50 °C
(Auto)restart electrical protections	Currently not present	Customizations			Yes (front)

DIMENSIONAL

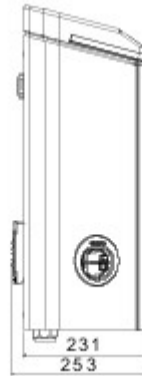

TECHNICAL SYMBOLOGY

IP

IP55

IK

IK10

STANDARDS/APPROVALS

