




The wall-mounted I-ON charging stations are the JOINON solutions for public and semi-public access, designed for charging electric vehicles and to withstand any wear including impacts, stress, vandalism and atmospheric agents. They are the first and only on the market guaranteed with a IP55 protection rating. The special design allows the units to be adapted into any urban context and parking configuration, with a targeted focus on the user experience of drivers. They are available with standard JoinOn graphics, which may be customised on request.

INPUT		- Socket/Connector Nr. (Type)		2 (Type 2 vandal-proof socket, with shutters)	
Terminal blocks	2 x (3 x 10 mm <sup>2</sup> )	Charging activation	Locally managed, via RFID		
Current nominal	64 A	Human Interface	LED RGB and TFT Display		
Total power	15 Kilowatt	Connectivity	Nu		
OUTPUT		- MECHANICAL FACTS			
Tensiune nominală	230 V	Mounting and installation	Wall mount		
Current alimentat (max)	32 A per socket	Culoare	Grey, Headboard RAL 7011		
Putere max.	7,4 kW per socket	Material	Steel sheet		
Thermal-magnetic protection	Currently not present	External treatments	Anti-corrosion and anti-graffiti		
Tip de protecție diferențială	Currently not present	Clasă de protecție IP	IP55		
Contor energie	YES (MID)	Cod IK	IK10		
DC Leakage check	Currently not present	Temperatură de operare	-25 +50 °C		
(Auto)restart electrical protections	Currently not present	Customizations	Yes (front)		

## DIMENSIONAL

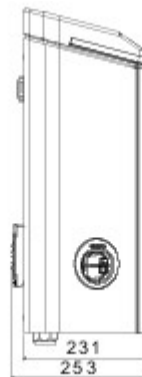

## TECHNICAL SYMBOLOGY

**IP**

IP55

**IK**

IK10

## STANDARDS/APPROVALS

