











BlueAbacus

MID-WATER BRUVS ASSEMBLY INSTRUCTIONS

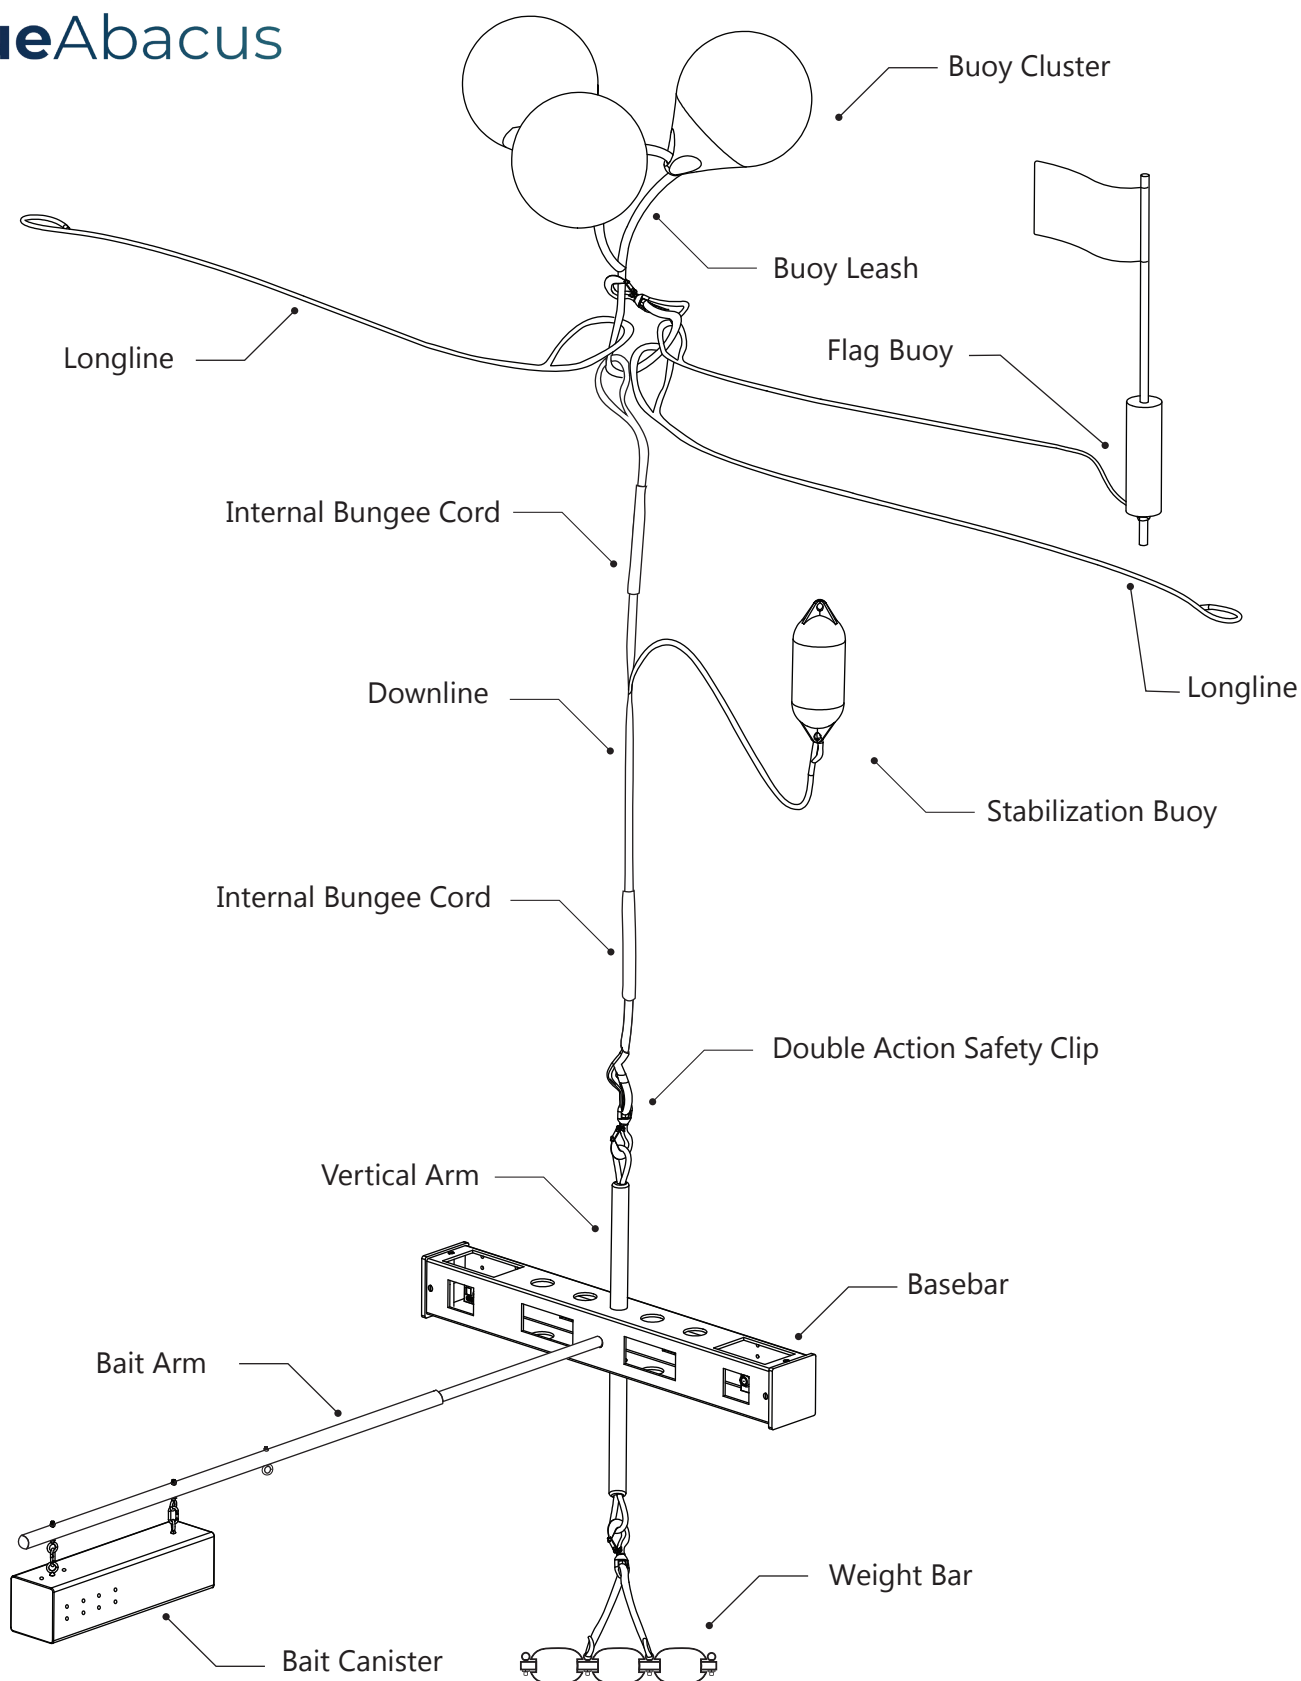


Parts Required

						
Vertical Arm & Basebar	Bait Arm & Bait Canister	Flag Buoy (Minimum height of 1.5 m)	Downline (10 m)	Longlines (200 m)	Buoy Cluster & Buoy Leash (2 m)	Weight Bar (3-4 kg)


Assembly Step 1

- 1(a) Connect bait arm sections.
1(b) Slide vertical tube into basebar.
1(c) Slide bait arm into basebar
and through vertical arm.

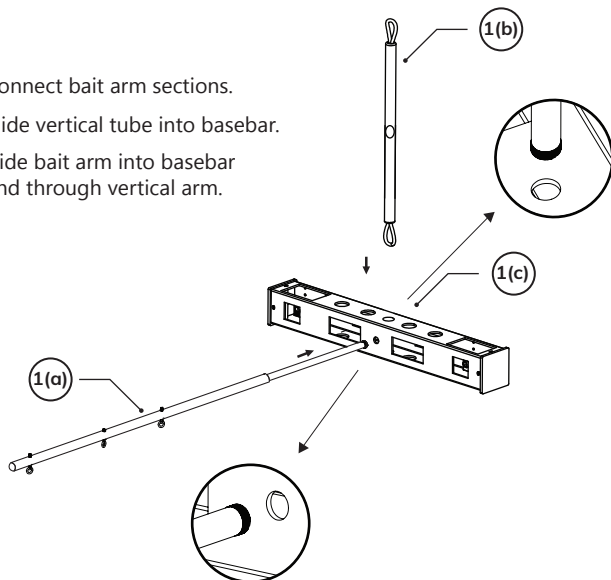


Assembly Step 2

- 2(a) Add weight bar.
2(b) Add bait canister.

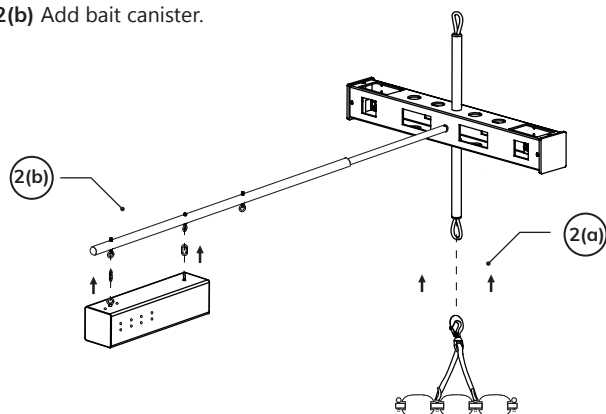


Assembly Step 3

- 3 Attach/ hook bottom of
downline to rig.

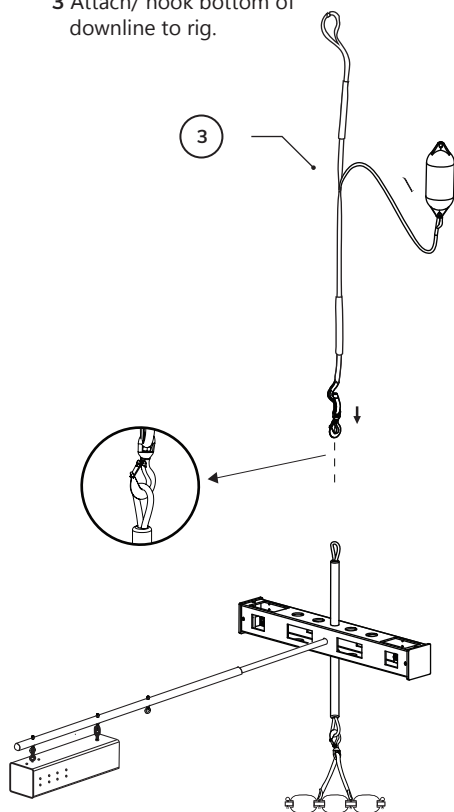

Assembly Step 4

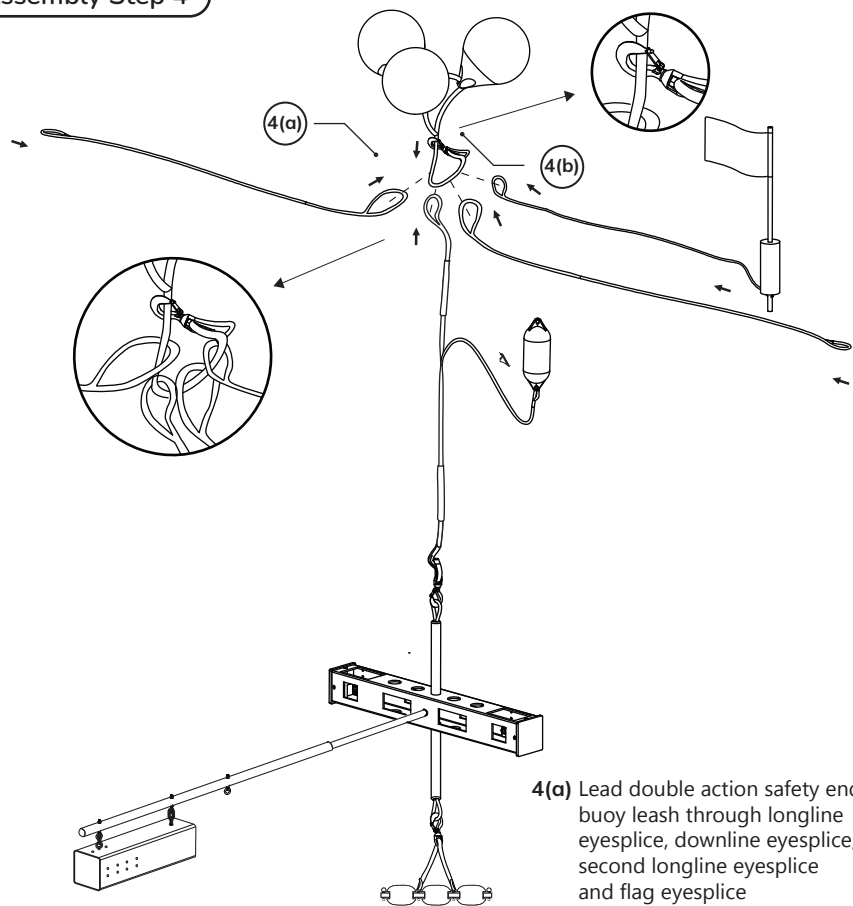

- 4(a) Lead double action safety end of
buoy leash through longline
eyesplice, downline eyesplice,
second longline eyesplice
and flag eyesplice
(where applicable).

- 4(b) Clip buoy leash double action
safety back onto buoy leash to
secure lines.