NINA - CARRÉ KNX

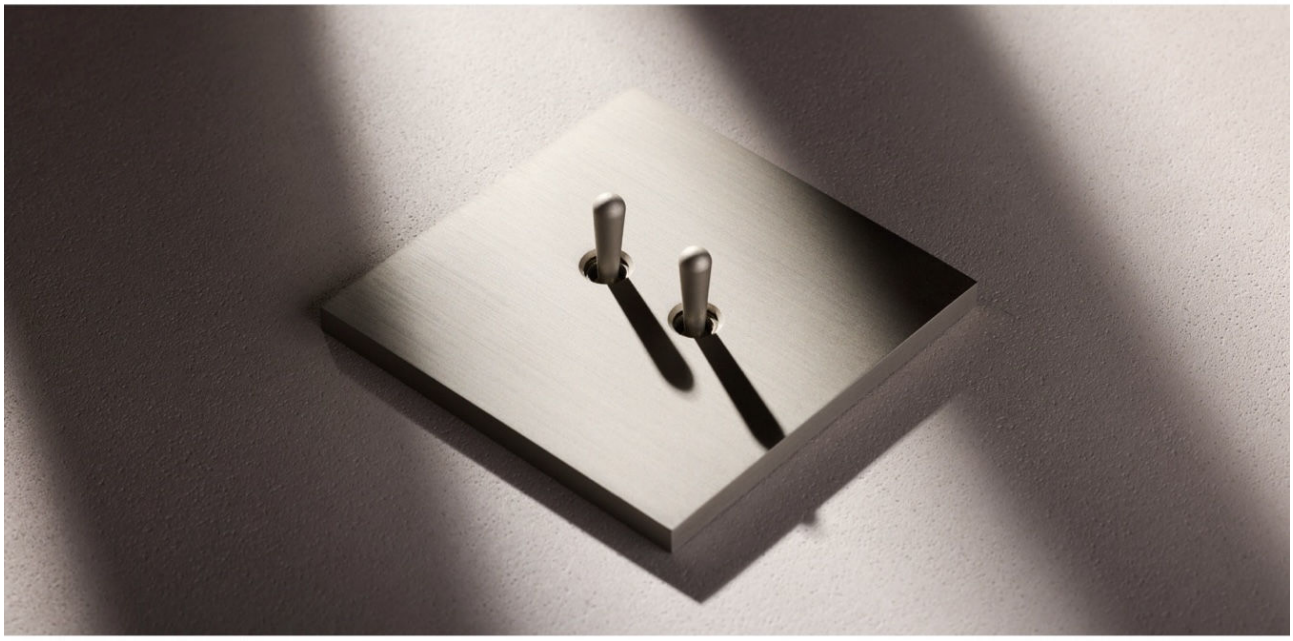

Lever: double push-button with central zero position 1-0-1

BUTTON ARRANGEMENTS ETS

KNX	CJC8001
KNX + temperature & humidity sensor	CJC8001TH

KNX	CJC8002
KNX + temperature & humidity sensor	CJC8002TH



The KNX collections of CJC Systems have the following functionalities:

- Night & Day LED-indicators brightness adaptability
- Pressing button, 1 object: ON, OFF, TOGGLE, 1 Byte values, 2 Byte values, 4 Byte values
- Pressing button, 3 objects: ON, OFF, TOGGLE, 1 Byte values
- Pressing and releasing button, 2 objects: ON, OFF, TOGGLE, 1 Byte values, 2 Byte values
- Short and long keystroke, 2 objects: ON, OFF, TOGGLE, 1 Byte values, 2 Byte values
- Dimming and blind / shutter processing
- Scenarios run and save ability
- LED Staircase function, on/off delay, scenarios attribution
- Basic logical functions (AND, OR, XOR, NOT) based on 2 entries
- RGB lights programming functionality
- Blinking of leds
- Optional: Integrated Temperature and Humidity sensor

- Main power supply 24V – 29V via KNX Bus
- Current consumption:
    - 4 buttons, all LEDS 100% = 10mA (29V)
    - 4 buttons, all LEDS 10% = 4mA (29V)
- Connection = standard WAGO KNX connector
- Operating temperature: -5°C … 45°C
- KNX programming button and LED = on front and rear side
- Max. group addresses = 86
- Max. associations = 86
- Number of communication objects = 71
- Application download time = approx. 30 sec.

Please pay attention to the button arrangement underneath when programming the NINA KNX switch in ETS.

BUTTON ARRANGEMENTS ETS

KNX	CJC8001
KNX + temperature & humidity sensor	CJC8001TH

KNX	CJC8002
KNX + temperature & humidity sensor	CJC8002TH