

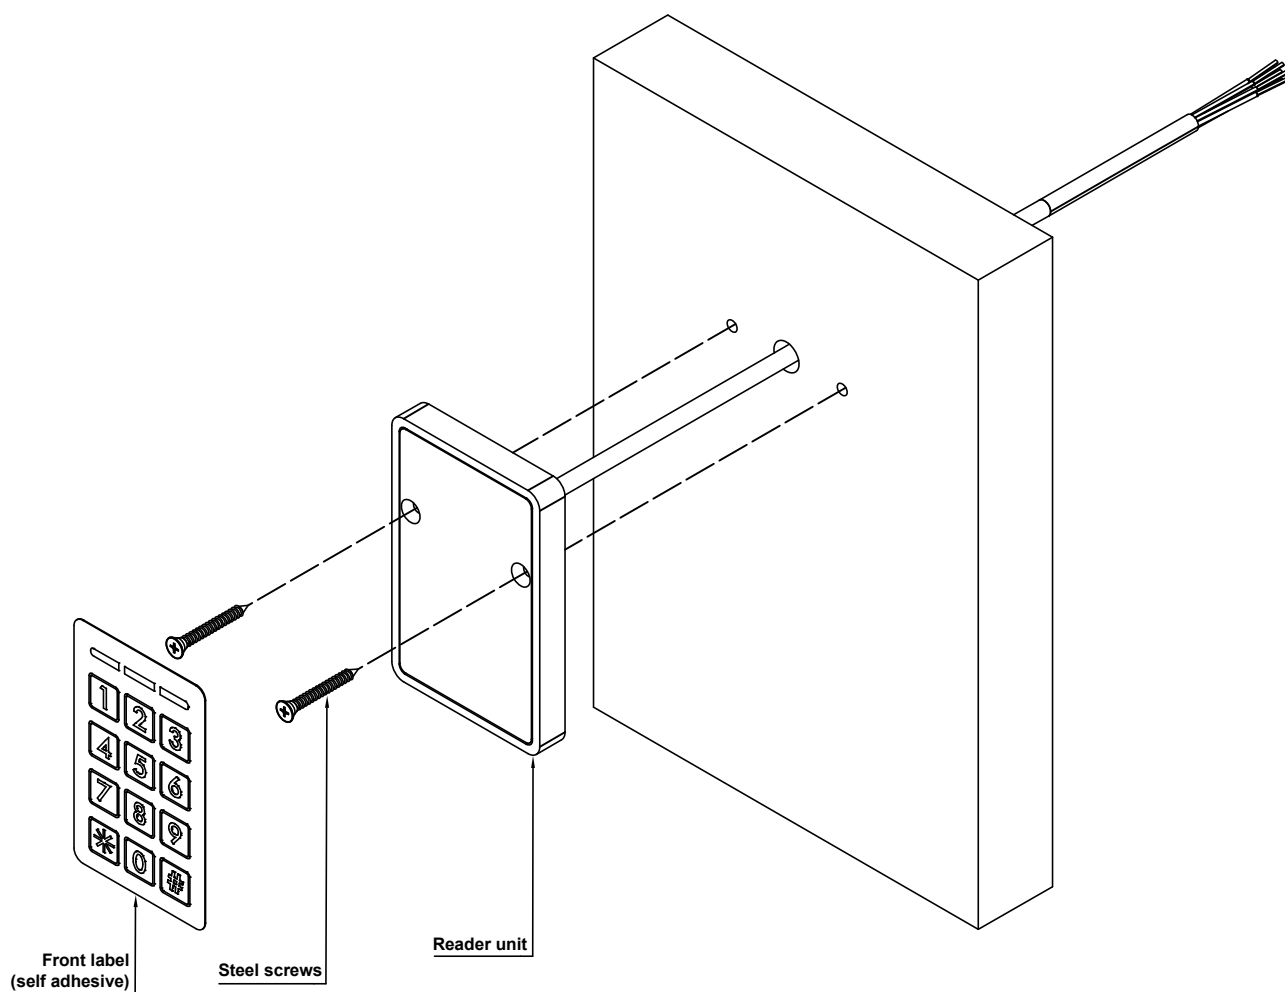


Installation guide

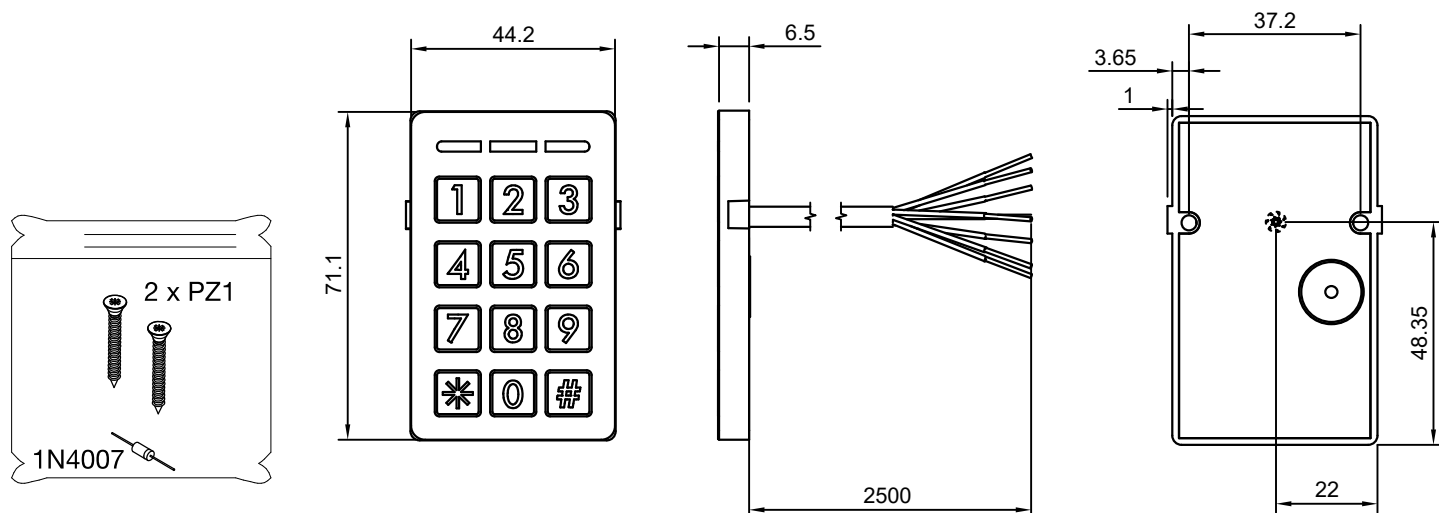


Installation


1

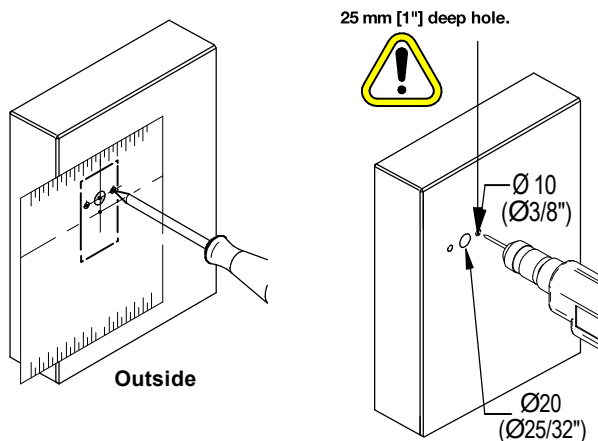


2

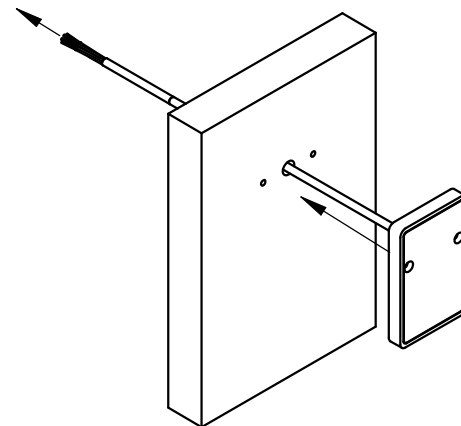

3

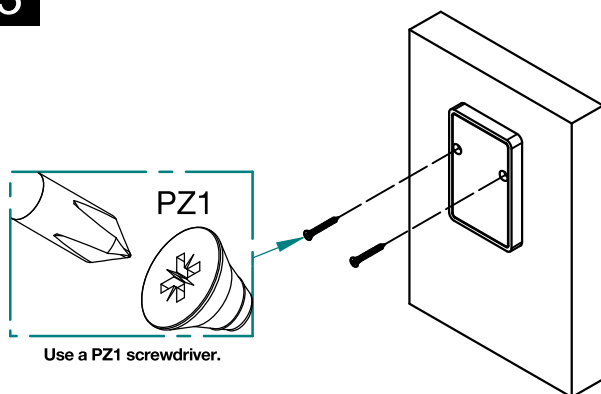

4

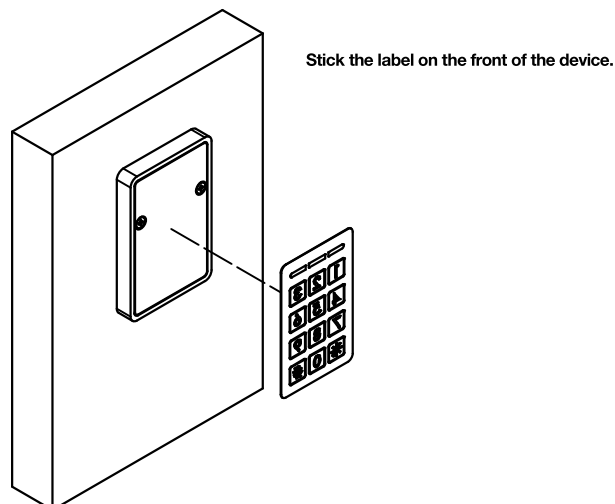

Wiring

Wire color	Function
Red	Power +, 9 to 24 VDC, ~45mA (NEVER exceed 24 VDC!!!)
Black	Power -, GND
White	Output 1, Open Collector, active LOW (GND)
Yellow	Output 2, Open Collector, active LOW (GND)
Green	Input, extGreen, activates/disactivates Green LED, active LOW (GND)
Orange	Input, extRed, activates/disactivates red LED, active LOW (GND)
Brown	Input, extBuzz activates/disactivates Buzzer, active LOW (GND)
Blue	Input, REX, Request of Exit on output 2, active LOW (GND)



Electrical characteristics

OPERATING CHARACTERISTICS			
	Min.	Max.	Unit
Temperature	-35	66	°C
Humidity	0	95	%

POWER SUPPLY	
9 to 24	VDC

Lock connection

