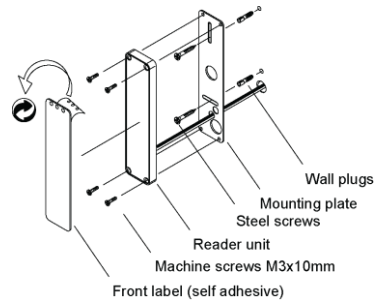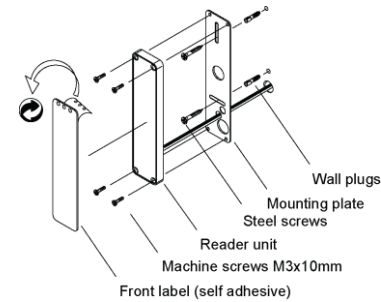# Mounting of CT/PR/BT/CP
CONLAN readers

Direct mounting with enclosed screws and plugs or by means either a mounting plate or a framework as described here:

Mounting plate (Art. No.: 460081):
Mounting plate in stainless steel allows for quick and easy mounting on all types of surfaces.
The mounting plate contains:
1 pcs   2 mm stainless steel plate
4 pcs   Machine screws M3x10
2 pcs   Screws 4x40
2 pcs   Plugs 6x30

Wall plugs
Mounting plate
Steel screws
Reader unit
Machine screws M3x10mm
Front label (self adhesive)

Framework for mounting (Art. No.: 460035) (white RAL 9016)**:**
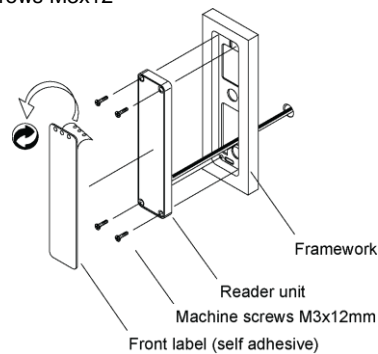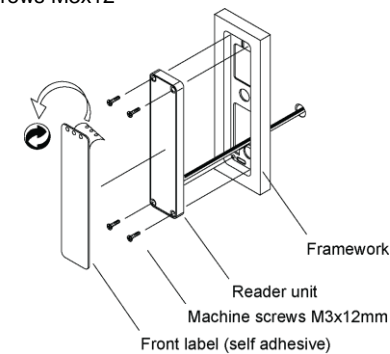Framework allows quick and easy mounting on all surfaces. Forms for the cable outlet in all directions.
Art. No.: 460035 (Anthracite grey 7016)
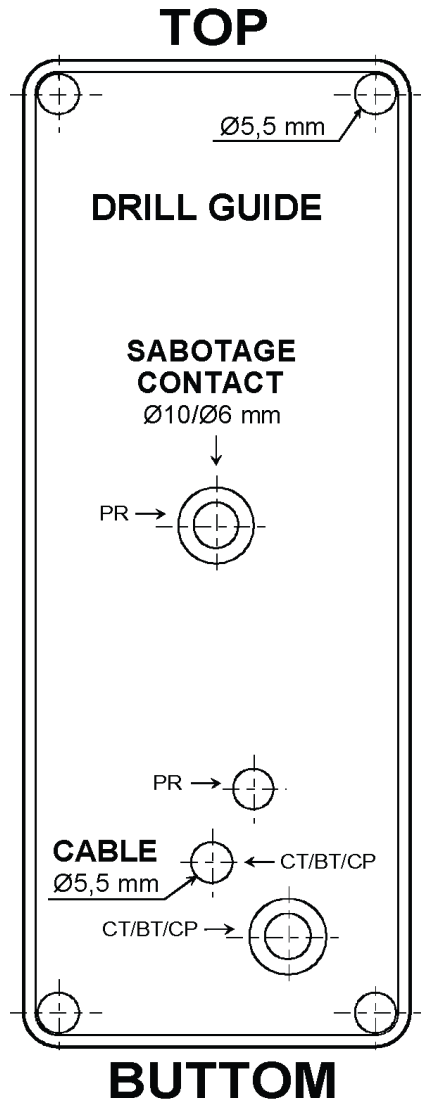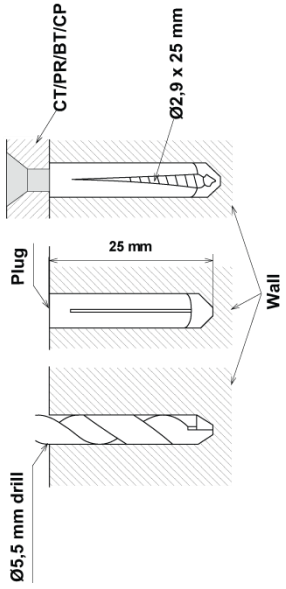Art. No.: 460039 (Silver RAL 9006)
Other colors made by order.
The framework contains:
1 pcs   Frame (H x W x D) 156 x 76 x 15
4 pcs   Machines screws M3x12

Framework
Reader unit
Machine screws M3x12mm
Front label (self adhesive)

Note that casting can cause variations, so check the cable's location before drilling cable hole!

CT/PR/BT/CP

Ø2,9 x 25 mm

Plug

25 mm

Wall

Ø5,5 mm drill

TOP

DRILL GUIDE

Ø5,5 mm

SABOTAGE CONTACT
Ø10/Ø6 mm

PR →

PR →

CABLE
Ø5,5 mm

← CT/BT/CP

CT/BT/CP →

BUTTOM

Note that casting can cause variations, so check the cable's location before drilling cable hole!

CT/PR/BT/CP

Ø2,9 x 25 mm

Plug

25 mm

Wall

Ø5,5 mm drill

TOP

DRILL GUIDE

Ø5,5 mm

SABOTAGE CONTACT
Ø10/Ø6 mm

PR →

PR →

CABLE
Ø5,5 mm

← CT/BT/CP

CT/BT/CP →

BUTTOM