



**CAPACITOR  
COMPETENCE**  
*since 1958*

ALUMINUM ELECTROLYTIC CAPACITORS

---

ALUMINUM ELECTROLYTIC CAPACITORS · SNAP-IN TYPE


# CD 29L QL SERIES

**JIANGHAI EUROPE**  
Electronic Components GmbH



ENGINEERED SOLUTIONS

v2019.1

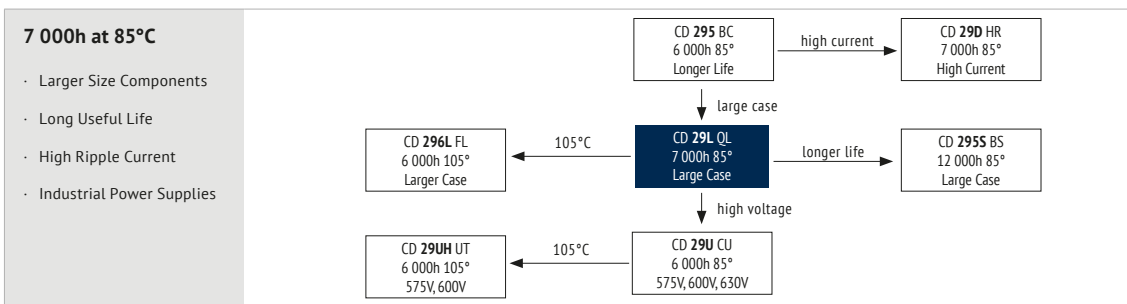

### ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85					
Voltage Range (V)	16 ~ 400	450 ~ 500					
Capacitance Range (µF)	390 ~ 120 000						
Capacitance Tolerance (20°C, 120Hz)	± 20%						
Leakage Current	After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.						
Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16 ~ 35	50 ~ 100	160 ~ 200	250 ~ 400	450	500
	$Z_{-25°C} / Z_{+20°C}$	4	3		4		
	$Z_{-40°C} / Z_{+20°C}$	15	10	6	8	-	
Fast Charge-Discharge	Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray						

**The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.**


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	7 000h	> 100 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,2 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

### MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	>50kHz
Rated Voltage (V) ≤ 50	0,90	1,00	1,07	1,15	1,15	1,15
63 ~ 100	0,90	1,00	1,17	1,32	1,45	1,50
≥ 160	0,80	1,00	1,16	1,30	1,41	1,45

Multipliers for typical operating conditions.

### MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

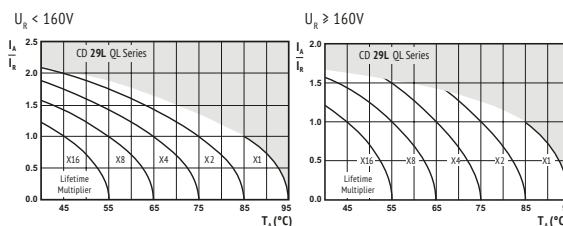

$I_a$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

$I_a$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

### ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

### SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



# CD 29L QL SERIES

## ALUMINUM ELECTROLYTIC CAPACITORS · SNAP-IN TYPE

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>rac</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5	
<b>160 (200) 1C</b>	56 000	15	10	0,60	1,5	10,4	30 x 45	ECS1CQL563M◇◇△△3045	
		15	10	0,60	1,5	9,8	40 x 40	ECS1CQL563M◇◇△△4040	
		12	8,0	0,60	1,5	10,8	35 x 50	ECS1CQL683M◇◇△△3550	
	68 000	12	8,0	0,60	1,5	11,5	40 x 50	ECS1CQL683M◇◇△△4050	
		9,8	7,0	0,60	1,5	11,8	35 x 60	ECS1CQL823M◇◇△△3560	
		9,8	7,0	0,60	1,5	11,8	40 x 50	ECS1CQL823M◇◇△△4050	
	82 000	8,0	6,0	0,60	1,5	13,2	35 x 80	ECS1CQL104M◇◇△△3580	
		8,0	6,0	0,60	1,5	13,5	40 x 60	ECS1CQL104M◇◇△△4060	
	100 000	6,7	5,0	0,60	1,5	15,3	35 x 105	ECS1CQL124M◇◇△△35105	
		6,7	5,0	0,60	1,5	14,8	40 x 80	ECS1CQL124M◇◇△△4080	
	<b>25 (32) 1E</b>	33 000	21	14	0,50	1,5	8,1	35 x 40	ECS1EQL333M◇◇△△3540
			21	14	0,50	1,5	8,7	40 x 40	ECS1EQL333M◇◇△△4040
39 000		18	12	0,50	1,5	9,0	35 x 45	ECS1EQL393M◇◇△△3545	
		18	12	0,50	1,5	9,6	40 x 40	ECS1EQL393M◇◇△△4040	
47 000		15	10	0,50	1,5	9,6	35 x 50	ECS1EQL473M◇◇△△3550	
56 000		12	8,0	0,50	1,5	10,3	35 x 60	ECS1EQL563M◇◇△△3560	
		12	8,0	0,50	1,5	10,8	40 x 50	ECS1EQL563M◇◇△△4050	
68 000		9,8	7,0	0,50	1,5	11,3	35 x 80	ECS1EQL683M◇◇△△3580	
		9,8	7,0	0,50	1,5	11,8	40 x 60	ECS1EQL683M◇◇△△4060	
82 000		8,1	6,0	0,50	1,5	13,5	40 x 80	ECS1EQL823M◇◇△△4080	
<b>35 (44) 1V</b>		27 000	20	14	0,40	1,5	8,2	35 x 45	ECS1VQL273M◇◇△△3545
			20	14	0,40	1,5	8,0	40 x 40	ECS1VQL273M◇◇△△4040
	33 000	17	11	0,40	1,5	8,7	35 x 50	ECS1VQL333M◇◇△△3550	
		14	10	0,40	1,5	10,3	35 x 60	ECS1VQL393M◇◇△△3560	
	39 000	14	10	0,40	1,5	9,6	40 x 50	ECS1VQL393M◇◇△△4050	
		12	8,0	0,40	1,5	11,4	35 x 80	ECS1VQL473M◇◇△△3580	
	47 000	12	8,0	0,40	1,5	10,8	40 x 60	ECS1VQL473M◇◇△△4060	
		9,5	7,0	0,40	1,5	12,1	40 x 70	ECS1VQL563M◇◇△△4070	
	56 000	9,5	7,0	0,40	1,5	12,1	40 x 70	ECS1VQL563M◇◇△△4070	
	68 000	7,9	6,0	0,40	1,5	14,2	40 x 80	ECS1VQL683M◇◇△△4080	
	<b>50 (63) 1H</b>	15 000	27	19	0,30	1,5	7,7	35 x 40	ECS1HQL153M◇◇△△3540
			27	19	0,30	1,5	8,1	40 x 40	ECS1HQL153M◇◇△△4040
18 000		23	16	0,30	1,5	8,3	35 x 45	ECS1HQL183M◇◇△△3545	
		23	16	0,30	1,5	8,3	40 x 40	ECS1HQL183M◇◇△△4040	
22 000		19	13	0,30	1,5	9,1	35 x 50	ECS1HQL223M◇◇△△3550	
		19	13	0,30	1,5	9,4	40 x 50	ECS1HQL223M◇◇△△4050	
27 000		15	10	0,30	1,5	11,2	35 x 80	ECS1HQL273M◇◇△△3580	
		15	10	0,30	1,5	10,8	40 x 60	ECS1HQL273M◇◇△△4060	
33 000		13	8,0	0,30	1,5	13,4	35 x 80	ECS1HQL333M◇◇△△3580	
		13	8,0	0,30	1,5	13,4	40 x 70	ECS1HQL333M◇◇△△4070	
39 000		11	7,0	0,30	1,5	15,5	40 x 80	ECS1HQL393M◇◇△△4080	
<b>63 (79) 1J</b>		12 000	23	16	0,20	1,5	8,7	35 x 50	ECS1JQL123M◇◇△△3550
	23		16	0,20	1,5	8,6	40 x 40	ECS1JQL123M◇◇△△4040	
	15 000	18	12	0,20	1,5	10,2	35 x 70	ECS1JQL153M◇◇△△3570	
		18	12	0,20	1,5	9,5	40 x 50	ECS1JQL153M◇◇△△4050	
	18 000	15	10	0,20	1,5	11,2	35 x 80	ECS1JQL183M◇◇△△3580	
		15	10	0,20	1,5	10,7	40 x 60	ECS1JQL183M◇◇△△4060	
	27 000	9,9	7,0	0,20	1,5	12,7	40 x 80	ECS1JQL273M◇◇△△4080	
	<b>80 (100) 1K</b>	8 200	33	23	0,20	1,5	6,9	35 x 50	ECS1KQL822M◇◇△△3550
			33	23	0,20	1,5	8,7	35 x 60	ECS1KQL103M◇◇△△3560
		10 000	23	16	0,20	1,5	9,7	35 x 70	ECS1KQL123M◇◇△△3570
			23	16	0,20	1,5	9,0	40 x 50	ECS1KQL123M◇◇△△4050
		12 000	18	12	0,20	1,5	10,5	35 x 80	ECS1KQL153M◇◇△△3580
18			12	0,20	1,5	10,2	40 x 60	ECS1KQL153M◇◇△△4060	
15 000		18	12	0,20	1,5	10,5	35 x 80	ECS1KQL153M◇◇△△3580	
18 000		15	10	0,20	1,5	12,3	40 x 80	ECS1KQL183M◇◇△△4080	
<b>100 (125) 2A</b>		5 600	48	33	0,20	1,5	7,0	35 x 45	ECS2AQL562M◇◇△△3545
			48	33	0,20	1,5	7,4	40 x 40	ECS2AQL562M◇◇△△4040
		6 800	40	27	0,20	1,5	8,0	35 x 50	ECS2AQL682M◇◇△△3550
			40	27	0,20	1,5	8,9	40 x 50	ECS2AQL682M◇◇△△4050
	8 200	33	23	0,20	1,5	9,6	35 x 70	ECS2AQL822M◇◇△△3570	
		33	23	0,20	1,5	9,6	40 x 60	ECS2AQL822M◇◇△△4060	
	10 000	27	19	0,20	1,5	10,4	35 x 80	ECS2AQL103M◇◇△△3580	
		27	19	0,20	1,5	10,2	40 x 60	ECS2AQL103M◇◇△△4060	
	12 000	23	16	0,20	1,5	12,3	40 x 80	ECS2AQL123M◇◇△△4080	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>rac</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5	
<b>160 (200) 2C</b>	2 200	91	63	0,15	1,5	4,9	35 x 45	ECS2CQL222M◇◇△△3545	
		74	52	0,15	1,5	5,3	35 x 50	ECS2CQL272M◇◇△△3550	
	3 300	61	42	0,15	1,5	5,5	35 x 70	ECS2CQL332M◇◇△△3570	
		61	42	0,15	1,5	5,5	40 x 60	ECS2CQL332M◇◇△△4060	
	3 900	52	36	0,15	1,5	5,9	35 x 80	ECS2CQL392M◇◇△△3580	
4 700	43	30	0,15	1,5	7,3	40 x 80	ECS2CQL472M◇◇△△4080		
<b>200 (250) 2D</b>	1 500	133	93	0,15	1,5	4,3	35 x 40	ECS2DQL152M◇◇△△3540	
		111	77	0,15	1,5	4,7	35 x 45	ECS2DQL182M◇◇△△3545	
	2 200	91	63	0,15	1,5	5,4	35 x 50	ECS2DQL222M◇◇△△3550	
		91	63	0,15	1,5	5,4	40 x 40	ECS2DQL222M◇◇△△4040	
	2 700	74	52	0,15	1,5	5,9	35 x 60	ECS2DQL272M◇◇△△3560	
		74	52	0,15	1,5	5,9	40 x 50	ECS2DQL272M◇◇△△4050	
	3 300	61	42	0,15	1,5	6,5	35 x 80	ECS2DQL332M◇◇△△3580	
		61	42	0,15	1,5	6,5	40 x 60	ECS2DQL332M◇◇△△4060	
	3 900	52	36	0,15	1,5	7,0	40 x 80	ECS2DQL392M◇◇△△4080	
	4 700	43	30	0,15	1,5	9,2	40 x 90	ECS2DQL472M◇◇△△4090	
	<b>250 (300) 2E</b>	1 000	199	139	0,15	1,5	3,7	35 x 40	ECS2EQL102M◇◇△△3540
			166	116	0,15	1,5	3,8	35 x 45	ECS2EQL122M◇◇△△3545
1 200		133	93	0,15	1,5	4,4	35 x 50	ECS2EQL152M◇◇△△3550	
		133	93	0,15	1,5	4,5	40 x 40	ECS2EQL152M◇◇△△4040	
1 800		111	77	0,15	1,5	5,0	35 x 70	ECS2EQL182M◇◇△△3570	
		111	77	0,15	1,5	5,0	40 x 50	ECS2EQL182M◇◇△△4050	
2 200		91	63	0,15	1,5	5,4	35 x 70	ECS2EQL222M◇◇△△3570	
		74	52	0,15	1,5	6,9	40 x 80	ECS2EQL272M◇◇△△4080	
<b>350 (400) 2V</b>		680	293	205	0,15	1,5	3,6	35 x 45	ECS2VQL681M◇◇△△3545
			293	205	0,15	1,5	3,6	40 x 40	ECS2VQL681M◇◇△△4040
			243	170	0,15	1,5	4,5	35 x 60	ECS2VQL821M◇◇△△3560
		820	243	170	0,15	1,5	4,3	40 x 50	ECS2VQL821M◇◇△△4050
	199		139	0,15	1,5	5,2	35 x 70	ECS2VQL102M◇◇△△3570	
	1 000	199	139	0,15	1,5	4,9	40 x 60	ECS2VQL102M◇◇△△4060	
		166	116	0,15	1,5	5,5	35 x 80	ECS2VQL122M◇◇△△3580	
	1 200	166	116	0,15	1,5	5,6	40 x 70	ECS2VQL122M◇◇△△4070	
		133	93	0,15	1,5	6,5	40 x 80	ECS2VQL152M◇◇△△4080	
	1 500	133	93	0,15	1,5	6,2	45 x 70	ECS2VQL152M◇◇△△4570	
		111	77	0,15	1,5	7,9	40 x 100	ECS2VQL182M◇◇△△40100	
	1 800	111	77	0,15	1,5	7,1	45 x 70	ECS2VQL182M◇◇△△4570	
91		63	0,15	1,5	8,7	40 x 100	ECS2VQL222M◇◇△△40100		
<b>400 (450) 2G</b>	560	356	249	0,15	1,5	3,2	35 x 50	ECS2GQL561M◇◇△△3550	
		356	249	0,15	1,5	2,8	40 x 40	ECS2GQL561M◇◇△△4040	
		293	205	0,15	1,5	3,7	35 x 60	ECS2GQL681M◇◇△△3560	
	680	293	205	0,15	1,5	3,8	40 x 50	ECS2GQL681M◇◇△△4050	
		243	170	0,15	1,5	4,2	35 x 60	ECS2GQL821M◇◇△△3560	
	820	243	170	0,15	1,5	4,1	40 x 50	ECS2GQL821M◇◇△△4050	
		199	139	0,15	1,5	4,9	35 x 70	ECS2GQL102M◇◇△△3570	
	1 000	199	139	0,15	1,5	4,8	40 x 60	ECS2GQL102M◇◇△△4060	
		199	139	0,15	1,5	4,6	45 x 50	ECS2GQL102M◇◇△△4550	
	1 200	166	116	0,15	1,5	5,8	35 x 80	ECS2GQL122M◇◇△△3580	
		166	116	0,15	1,5	5,5	40 x 60	ECS2GQL122M◇◇△△4060	
	1 500	133	93	0,15	1,5	6,9	40 x 90	ECS2GQL152M◇◇△△4090	
133		93	0,15	1,5	6,8	45 x 80	ECS2GQL152M◇◇△△4580		
1 800	111	77	0,15	1,5	7,9	40 x 100	ECS2GQL182M◇◇△△40100		
	111	77	0,15	1,5	7,3	45 x 80	ECS2GQL182M◇◇△△4580		
2 200	91	63	0,15	1,5	8,8	40 x 110	ECS2GQL222M◇◇△△40110		
	91	63	0,15	1,5	8,3	45 x 90	ECS2GQL222M◇◇△△4590		
<b>450 (500) 2W</b>	470	424	296	0,15	1,5	3,0	35 x 50	ECS2WQL471M◇◇△△3550	
		424	296	0,15	1,5	3,0	40 x 40	ECS2WQL471M◇◇△△4040	
	560	356	249	0,15	1,5	3,1	35 x 50	ECS2WQL561M◇◇△△3550	
		356	249	0,15	1,5	3,3	35 x 60	ECS2WQL561M◇◇△△3560	
	680	356	249	0,15	1,5	3,4	40 x 50	ECS2WQL561M◇◇△△4050	
		293	205	0,15	1,5	3,5	35 x 60	ECS2WQL681M◇◇△△3560	
	820	293	205	0,15	1,5	3,8	35 x 70	ECS2WQL681M◇◇△△3570	
		293	205	0,15	1,5	3,8	40 x 60	ECS2WQL681M◇◇△△4060	
	820	243	170	0,15	1,5	4,6	35 x 80	ECS2WQL821M◇◇△△3580	
		243	170	0,15	1,5	4,4	40 x 60		

# CD 29L QL SERIES

## ALUMINUM ELECTROLYTIC CAPACITORS · SNAP-IN TYPE

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipa- tion Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RMS</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 5	
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)			
<b>450 (500) 2W</b>	1 000	199	139	0,15	1,5	5,7	35 x 80	ECS2WQL102M◇◇△△3580	
		199	139	0,15	1,5	5,2	40 x 60	ECS2WQL102M◇◇△△4060	
	1 200	166	116	0,15	1,5	5,9	40 x 70	ECS2WQL122M◇◇△△4070	
		166	116	0,15	1,5	6,2	45 x 70	ECS2WQL122M◇◇△△4570	
	1 500	133	93	0,15	1,5	7,3	40 x 100	ECS2WQL152M◇◇△△40100	
		133	93	0,15	1,5	7,0	45 x 80	ECS2WQL152M◇◇△△4580	
	1 800	111	77	0,15	1,5	7,9	45 x 100	ECS2WQL182M◇◇△△45100	
	<b>500 (550) 2H</b>	390	511	357	0,15	1,5	1,9	35 x 50	ECS2HQL391M◇◇△△3550
		470	424	296	0,15	1,5	2,3	35 x 60	ECS2HQL471M◇◇△△3560
		560	356	249	0,15	1,5	2,5	35 x 60	ECS2HQL561M◇◇△△3560
356			249	0,15	1,5	2,7	40 x 60	ECS2HQL561M◇◇△△4060	
680		293	205	0,15	1,5	3,1	35 x 80	ECS2HQL681M◇◇△△3580	
		293	205	0,15	1,5	2,8	40 x 70	ECS2HQL681M◇◇△△4070	
820		243	170	0,15	1,5	3,4	35 x 90	ECS2HQL821M◇◇△△3590	
		243	170	0,15	1,5	3,3	40 x 70	ECS2HQL821M◇◇△△4070	
1 000		199	139	0,15	1,5	3,9	40 x 80	ECS2HQL102M◇◇△△4080	
		199	139	0,15	1,5	3,9	45 x 70	ECS2HQL102M◇◇△△4570	
1 200		166	116	0,15	1,5	4,3	40 x 90	ECS2HQL122M◇◇△△4090	
1 500		133	93	0,15	1,5	4,8	40 x 100	ECS2HQL152M◇◇△△40100	



### ORDER CODE SNAP-IN TYPE


EC	S	2G	QC	221	M	T6	P2	2535	-	JExxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code	Capacitance Tolerance	Terminal Style	Terminal / Pitch	Dimension (mm)	Material Code	for Specials only
EC Electrolytic Capacitor	Snap-In S	6,3V OJ	CD 293 BZ	0,1 OR1	<b>±20%</b> M	4,0mm Pin Length T/L4	<b>2 Pin P2</b>	22x40 2240	Standard -	
		10V 1A	CD 294 BW	0,47 R47	±10% K	<b>6,3mm Pin Length T/L6</b>	3 Pin P3	30x45 3045	PVC V	
		16V 1C	CD 295 BC	1,0 O10	+30/-10% Q	Soldering Pin S4	4 Pin P4	35x80 3580	PET E	
		20V 1D	CD 295S BS	2,2 2R2	+20/-0% R	on request: alternative pin types	5 Pin P5	45x100 45100		
		25V 1E	CD 296 KC	100 101	±15% L		6 Pin P6	50x105 50105		
		35V 1V	CD 296L FL	1 000 102	+20/-10% V	<b>■ = preferred</b>				
		40V 1G	CD 297 BB	10 000 103						
		50V 1H	CD 299 PG							
		63V 1J	CD 29C QC							
		80V 1K	CD 29D HR							
		100V 2A	CD 29G BA							
		125V 2B	CD 29H QH							
		160V 2C	CD 29HD QF							
		180V 2K	CD 29L QL							
		200V 2D	CD 29U CU							
		250V 2E	CD 29UH UT							
		385V 2J	CD 840 ZQ							
		400V 2G	CD 891 ZI							
		415V 2P	CD 892 ZL							
		420V 2X	CD 895 ZK							
		450V 2W								
		500V 2H								
		550V 2Y								
		575V 2Z								
		600V 2S								
		630V 1J								



# CD 29L QL SERIES

## ALUMINUM ELECTROLYTIC CAPACITORS · SNAP-IN TYPE

### 2 PIN TYPE: T6P2 / T4P2 STANDARD

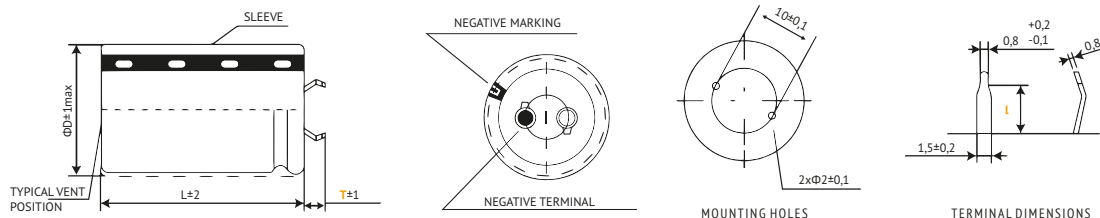


Standard Version: Self-Lock Terminal. Other terminal types and styles on request.  
For diameter  $\varnothing D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length <b>T</b>	6,3 mm	4,0 mm
Pin Detail <b>L</b>	3,5 mm	2,5 mm

in mm

### 3 PIN TYPE: T4P3

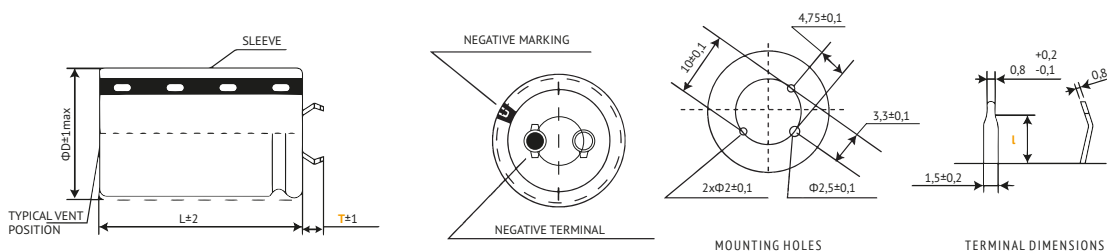


For diameter  $\varnothing D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

Terminal	T6	T4
Pin Length <b>T</b>	-	4,0 mm
Pin Detail <b>L</b>	-	2,5 mm

in mm

### 4 PIN TYPE: T6P4/T4P4 STANDARD

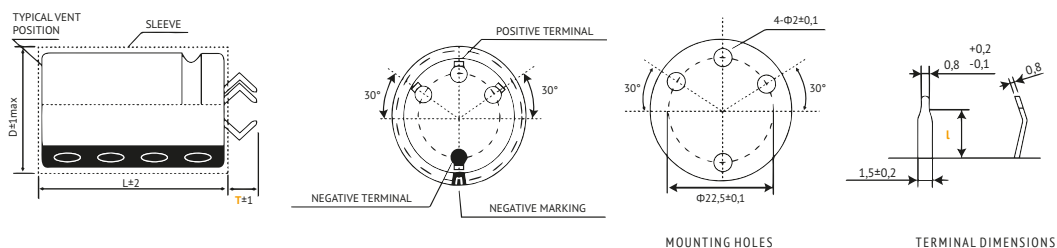


Standard Version: Non-Lock-Terminal. Other terminal types and styles on request.  
For  $\varnothing D \geq 30\text{mm}$  only.  
For diameter  $\varnothing D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length <b>T</b>	6,3 mm	4,0 mm
Pin Detail <b>L</b>	3,5 mm	2,5 mm

in mm



#### 4 PIN TYPE: L6P4/L4P4 SELF-LOCK TERMINAL

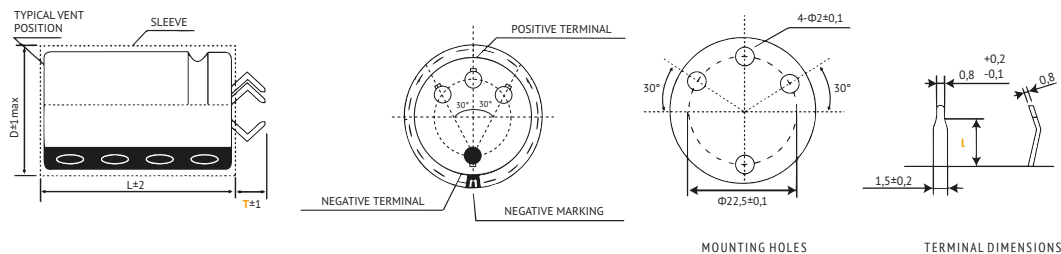


For  $\phi D \geq 30\text{mm}$  only. Other terminal types and styles on request.  
 For diameter  $\phi D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length <b>T</b>	6,3 mm	4,0 mm
Pin Detail <b>l</b>	3,5 mm	2,5 mm

in mm


#### 5 PIN TYPE: S4P5 SOLDERING PIN

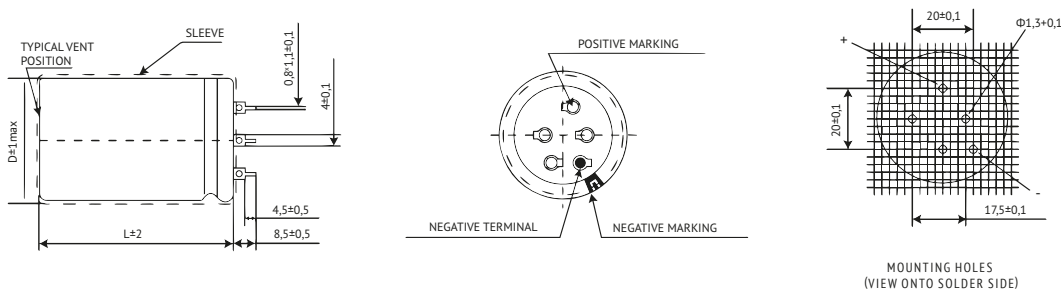

For  $\phi D \geq 30\text{mm}$  only.  
 For diameter  $\phi D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

in mm

#### EXAMPLE: AXIAL MOUNTING

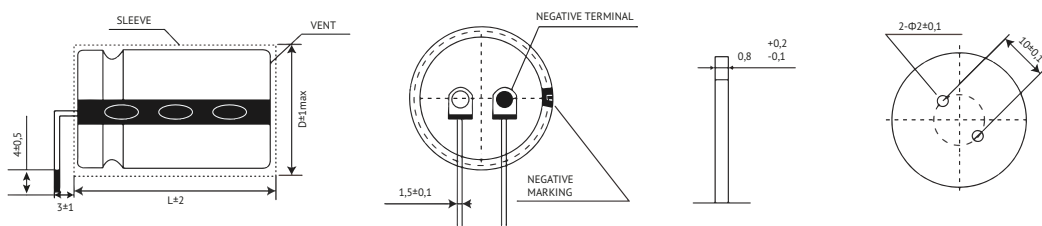

For  $\phi D \geq 25\text{mm}$  only.  
 Available also for high vibration usage.

in mm

Other Terminal Styles on request.

# LIFETIME ESTIMATION

To estimate the Lifetime of a non-solid Aluminum Electrolytic Capacitor from Jianghai, the following formulas can be utilized. The Lifetime depends mainly on the ambient temperature, the ripple current and, within certain limits, the operating voltage applied. Other parameters may also affect the Lifetime. Moreover,  $L_0$  can be interpreted in many different ways, which has a fundamental influence on the numerical result. Jianghai offers a high transparency by publishing the different typical definitions of Lifetimes in each datasheet. Lifetime estimations are approximations by nature. Please let JIANGHAI EUROPE confirm any result before using it. The formulas given here do not constitute part of a contract nor of a specification. The formulas do not cover additional aging effects of certain electrolytic systems or other chemical effects. Also the dimensions of the components may have an effect. Forced cooling or other additional cooling-methods have a strong impact on the Lifetime and are not covered by the formulas as defined. For the estimation and interpretation of Lifetime, a close collaboration with JIANGHAI EUROPE is strongly advised.

## STRUCTURAL FORMULA

$$L = L_0 \cdot K_T \cdot K_R \cdot K_V$$

WHERE:

L	Total Lifetime
$L_0$	Lifetime under Nominal Load at Upper Category Temperature (see catalogue)
$K_T$	Temperature Factor
$K_R$	Ripple Current Factor
$K_V$	Voltage Factor

## $K_T$ TEMPERATURE FACTOR

Aluminum Electrolytic Capacitors follow roughly the 10 K rule of Arrhenius. It is possible to estimate the Lifetime by rule of thumb: When the operational temperature is reduced by 10 K, the Lifetime will double. The formula for  $K_T$  in detail is:

$$K_T = 2^{\frac{T_0 - T_A}{10K}}$$

WHERE:

$T_0$	Rated Temperature
$T_A$	Ambient Temperature

## $K_R$ RIPPLE CURRENT FACTOR

To estimate the influence of ripple current on lifetime, Jianghai uses a safety factor  $K_i$ . Under certain conditions this value can be set to  $K_i=2$ , which is prolonging the lifetime. Please contact Jianghai Europe for details and approval.

$$K_R = K_i^A \frac{\Delta T_0}{10K}$$

WITH:

$$A = 1 - \left( \frac{I_A}{I_R} \right)^2$$

WHERE:

$I_A$	Actual Rated Ripple Current
$I_R$	Ripple Current at Upper Category Temperature (databook value)
$\Delta T_0$	Core Temperature Rise of the capacitor (typically 3,5 ~ 5 K for $T_0 = 105^\circ\text{C}$ and 3,5 ~ 10K for $T_0 = 85^\circ\text{C}$ , see databook value)
$K_i$	Basis, typically defined as $T_0 = 105^\circ\text{C}$ $I_A > I_R$ : $K_i=4$ $I_A \leq I_R$ : $K_i=2$ $T_0 = 85^\circ\text{C}$ $K_i=2$

**Remark: Safety Factor  $K_i$  may be set as  $K_i=2$  under certain defined conditions. Please contact Jianghai Europe for approval.**

>>



# LIFETIME ESTIMATION

## K<sub>V</sub> VOLTAGE FACTOR

For Radial Electrolytic Capacitors, this part of the formula has no impact (K<sub>V</sub> = 1). But for some bigger capacitors like Snap-In and Screw-Terminal types with rated voltages above 160V, the operating voltage will affect their Lifetime. It is expressed as follows:

FOR:

$$0,6 \leq \frac{U_A}{U_R} \leq 1$$

$$K_V = \left( \frac{U_A}{U_R} \right)^{-2,5}$$

WHERE:

U<sub>A</sub> Actual Operating Voltage

U<sub>R</sub> Rated Voltage

FOR:

$$0 < \frac{U_A}{U_R} < 0,6$$

$$K_V = 3,59$$

FOR:

$$\frac{U_A}{U_R} > 1 \text{ not allowed}$$

$$K_V = 1$$

FOR:

Radial Capacitors or U<sub>R</sub> ≤ 160V

$$K_V = 1$$

## FREQUENCY CORRECTION FACTORS:

If the actual Ripple Currents are not given at the same frequency like I<sub>0</sub>, correction factors need to be applied.

$$I_A = \sqrt{\left( \frac{I_{f1}}{F_{f1}} \right)^2 + \left( \frac{I_{f2}}{F_{f2}} \right)^2 + \dots + \left( \frac{I_{fn}}{F_{fn}} \right)^2}$$

## JIANGHAI ELECTROLYTIC CAPACITOR LIFETIME ESTIMATION

### FORMULA (incl. Safety Factors):

$$L = L_0 \cdot 2^{\frac{T_0 - T_A}{10K}} \cdot K_i \left[ 1 - \left( \frac{I_A}{I_R} \right)^2 \right]^{\frac{\Delta T_0}{10K}} \cdot \underbrace{\left( \frac{U_A}{U_R} \right)^{-n}}_{K_V}$$

WITH TYPICAL VALUES:

$$T_0 = 105^\circ\text{C} \quad I_A > I_R : K_i = 4$$

$$I_A \leq I_R : K_i = 2$$

$$T_0 = 85^\circ\text{C} \quad K_i = 2$$

Δ T<sub>0</sub> = depending on the series: 3,5~10K,  
see databook value

$$0,6 \leq \frac{U_A}{U_R} \leq 1 \rightarrow n = 2,5$$

$$0 < \frac{U_A}{U_R} < 0,6 \rightarrow K_V = \left( \frac{U_A}{U_R} \right)^{-n} = 3,59$$

FOR:

U<sub>R</sub> ≤ 160V, Radial and

$$\frac{U_A}{U_R} > 1 \rightarrow K_V = 1$$



# HANDLING PRECAUTIONS

## WARNING

JIANGHAI is not liable for any extent of possible injuries or damages to persons or things, of any kind, caused by the improper application of and/or operating conditions harmful to electrolytic capacitors. Misapplications which may cause failures include, but are not limited to: ripple current or peak current or voltage above specification, operating voltage above surge voltage specified, temperature exposure outside the specified operating temperature range. Examples of harmful operating conditions comprise, but are not limited to: unusual storage or transport temperatures, excessive and/or rapid changes of ambient temperature or humidity, heavy mechanical shock or vibration, corrosive and abrasive particles in the ambient (cooling) air, conducting dust in the ambient (cooling) air, oil or water vapor or corrosive substances, explosive gas or dust, operation under extremely high or low ambient pressure conditions (below or above sea level), superimposed radio frequency voltages, radioactivity. In case of doubt about the impact of operating conditions on capacitor performance, please contact JIANGHAI.

## PERSONAL SAFETY

Electrical or mechanical misapplication of electrolytic capacitors may be hazardous. Personal injury or property damage may result from explosion of a capacitor or from the expulsion of electrolyte due to mechanical disruption or the release of a safety vent of a capacitor. In case of injury or skin or eye exposure to electrolyte, immediately seek professional medical advice. Before using electrolytic capacitors in any application, please read these Handling Precautions, familiarizing thoroughly with the information contained herein. Please check before using any of our electrolytic capacitors if these components fulfill the requirements of your application and that warnings and instructions for use are followed.

## WARRANTY

The information contained in this catalogue does not form part of any quotation or contract, is believed to be accurate, reliable and up to date. Quality data are based on the statistical evaluations of a large quantity of parts and do not constitute a guarantee in a legal sense. However, agreement on these specifications does mean that the customer may claim for replacement of individual defective capacitors within the terms of delivery. We will not assume any liability beyond the replacement of defective components. This applies in particular to any consequential damage caused by component failure. Furthermore it must be taken into consideration that the figures stated for lifetime, failure rates and outlier percentages refer to the average production status and are therefore to be understood as mean values (statistic expectations) for a large number of delivery lots of identical capacitors. These figures are based on application experience and data obtained from preceding tests under normal conditions, or – for purpose of accelerated aging – more severe conditions. JIANGHAI reserves the right to change these specifications without prior notice. Any application information given is advisory and does not form part of any specification. The products are not primarily designed for use in life support applications, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. JIANGHAI customers using or selling these products for use in such applications without prior written consent of JIANGHAI do so at their own risk and agree fully to indemnify JIANGHAI for any damage resulting from such improper use or sale. This version of the catalogue supersedes all previous versions. Latest versions of datasheets can be found on our homepage: [www.jianghai-europe.com](http://www.jianghai-europe.com). For more details on precautions and guidelines for aluminum electrolytic capacitors, please refer to CENELEC Technical Report CLC/TR 50454:2008 E, "Guide for the application of aluminum electrolytic capacitors".

## POLARITY

Electrolytic capacitors are polar and shall never be used with incorrect polarity, as there is a possible danger of shorting or destruction.

## RATED VOLTAGE $U_R$

The rated voltage is marked on the capacitor and defined in the datasheets as  $U_R$ . This voltage should never be exceeded and is the maximum peak voltage including any ripple voltages allowed to avoid a shortening of the lifetime or damage of the capacitor. When a ripple current is applied to the capacitor, the sum of the peak ripple voltage and bias DC voltage shall never exceed the rated voltage. It might be necessary to lower the maximum allowed bias DC voltage, when certain ripple currents are applied to the capacitor.

## SURGE VOLTAGE

Maximum voltage, which may be applied to the capacitor for short periods of time: max. 1000 cycles of 30 sec. per 6 min., max. 5 pulses per hour. Capacitance drift +/- 15% max.

## REVERSE VOLTAGE

Reverse voltages or voltages < 0V are not allowed.

## RECOVERY VOLTAGE

Electric potential between the positive and negative terminal may exist as a result of dielectric absorption. Please take action that this load does not damage other devices or scare workers during the production process (sparks possible). If needed please discharge the capacitor through a 1kΩ resistor.

## TEMPERATURE RANGE

Use electrolytic capacitors only within the specified operating temperature range.

## OVER-CURRENT

Currents exceeding the rated ripple currents should be avoided.

## RIPPLE CURRENT/VOLTAGE

The combined value of DC voltage and peak AC voltage (due to ripple current) shall not exceed the rated voltage and shall never be < 0V. Use of aluminum electrolytic capacitors under ripple current with wide amplitudes is equivalent to rapid charge-discharge operation.

## RAPID CHARGING/DISCHARGING

Rapid charging/discharging generates severe heat and gas may be emitted which may lead to explosion. Consult JIANGHAI about specially designed capacitors suitable for such kind of applications. Example: Servo Drive Application

## BALANCING RESISTORS

Balancing resistors should be utilized if capacitors are used in serial connection. Please choose low-tolerance resistors to limit voltage drift.

## CHARGE-DISCHARGE PROOF

JIANGHAI capacitors are charge-discharge proof, which means that 10<sup>6</sup> switching cycles will cause capacitance reduction of less than 10%.

## LIFETIME

There are many different lifetime definitions known without any true standard definition. Take special care when capacitors are compared that the capacitors fulfill the needed requirements. JIANGHAI publishes all conditions to be as transparent as possible. In the case of lifetime tests with additional ripple currents, the bias DC voltage must be reduced, so that the sum of bias DC voltage and the peak of the ripple voltage does not exceed the Rated Voltage  $U_R$ .

**Load life:** Period of time, during which the technical parameters of all capacitors stay within the given limits. JIANGHAI defines this without allowing for outliers. >>

## JIANGHAI EUROPE

Electronic Components GmbH



ENGINEERED SOLUTIONS

Customer specific adaptations needed? Please contact Jianghai Europe GmbH:  
TELEFON: +49 (0) 2151 652088-72 | E-MAIL: [INFO@JIANGHAI-EUROPE.COM](mailto:INFO@JIANGHAI-EUROPE.COM)

10/12  
2019.1

# HANDLING PRECAUTIONS

**Useful life:** Defined like load life, but with a larger range of parameter change.

**Endurance test:** IEC 60384-4 defines the acceptable drift criteria of electrical parameters after the endurance tests (continuous voltage test).

**Shelf Life:** Definition of time with acceptable drift of capacitor parameters after storage at upper category temperature without load. JIS-C-5102-1994

## VIBRATION AND MECHANICAL STRESS

Capacitors are sensitive to vibration and mechanical forces applied on the leads. Do not use capacitors, which have been dropped onto a rigid surface.

## INSULATION

If any defect of the sleeve is visible, the component should not be used – the same holds for any kind of visible damage. A capacitor should be electrically isolated from the following parts: aluminum case, cathode lead wire, anode lead wire and circuit pattern, and auxiliary terminal of snap-in type. The sleeve is not recognized as an isolator and therefore the standard capacitor should not be used in a place where insulation function is needed. Please contact JIANGHAI if a higher grade of insulation is required.

## ENVIRONMENTAL CONDITIONS

Avoid direct contact with water, salt solution, oil, dewing conditions. Halogens generally, especially fumigation treatment with bromides and flame retardant agents containing halogens must be avoided. Avoid exposing to direct sunshine, ozone, ultraviolet rays and x-ray radiation. Air Pressure: Max. 150kPa, min. 8kPa. No heavy air pressure changes are allowed. Do not use or store in an environment containing any hazardous gas (e.g., hydrogen sulphide, sulphurous acid, nitrous acid, chlorine, ammonia, bromine, methyl bromide, other halogens) or acidic or alkaline solutions.

## STORAGE

Temperature 5 to 35°C, relative humidity below 75%. Electrolytic capacitors may accumulate charge naturally during storage. In this case discharge through a 1kOhm resistor before use (Recovery voltage). Leakage current may be increased after long storage time. In this case the capacitor should be subjected to the rated voltage treatment through a 1kOhm resistor before use for 1 hour, then it should be discharged through a resistor of about 1 Ohm/Volt. Storage times above 1 year should be avoided or rated voltage treatment may be necessary. In accordance to IEC 60384-4 electrolytic capacitors are subject to a reforming process before acceptance testing. Rated voltage is applied via a series resistance (100Ω:  $U_R \leq 100V_{DC}$ , 1kΩ:  $U_R > 100V_{DC}$ ).

## SOLDERING

Soldering conditions (temperature, times) should be within specified conditions, especially for SMD components. Avoid high soldering temperatures as this may reduce lifetime or damage the capacitor. Do never dip the capacitor body into molten solder. Flux should not be adhered to the capacitor's body but only to its terminals. For details and different methods please contact us.

## GLUEING, CLEANING AND COATING

Do not use fixing agents or cleaning substances containing halogens. Do not use coating and moulding components that completely seal the capacitor from the environment. Also, never use solvents containing: halogenated hydrocarbons, alkali, petroleum, trichloroethylene/-ethane, xylene, acetones, trichlorotrifluoroethane, tetrachloroethylene, methylenechloride, chloroform, acetates, ketones, esters, chlorides and bromides.

## MOUNTING

Other devices, which are mounted near the capacitor, should not touch the capacitor. Additional heat coming from other components near the capacitor may reduce the lifetime of the capacitor. Do never bend or twist the capacitor after soldering to avoid stress on the leads. Radial capacitors are not protected against mechanical forces on the

leads. Forces on the pins might damage the capacitor. No printed circuit board tracks are allowed between the lead pads of the capacitor. Screw Terminal capacitors should only be mounted in an upright position.

## TRANSPORT

Avoid fumigation and spraying insecticides (especially with bromides) in the import or export procedures which can cause corrosion. This applies also to the finished devices.

## MAINTENANCE

Periodical inspection should be carried out for the capacitor: visual inspection to check pressure relief open or leakage of electrolyte, electrical characteristics as leakage current, capacitance, and dissipation factor.

## ELECTROLYTE AND SEPARATOR PAPER

Electrolyte and separator paper used in aluminum capacitors may be flammable. Also, electrolyte is electrically conductive. Therefore, in case electrolyte gets in contact with PC board it may cause corrosion of circuit pattern or cause short circuit between patterns, and may lead to smoke generation or ignition in worst case.

## CAUTION DURING USE OF CAPACITORS

Do not touch the terminals of capacitors. Keep the capacitor free from conductive solution, such as acids, alkali and so on. Ensure that the operating environment of the equipment into which the capacitor has been built is within the specified conditions mentioned in the catalogue or specification sheets.

## SAFETY VENT

The safety vent needs some free space to open properly. Allow for free headroom of at least 2mm for diameter <16mm, more than 3mm for diameter 18-35mm, more than 5mm for case diameter 40mm and larger.

## EMERGENCY ACTIONS

When the pressure relief vent is open and some gas blows out from the capacitor, please turn the main switch of the equipment off or pull out the plug from the power outlet immediately. During safety vent operation, extremely hot gas (>100°C) may blow out of the capacitors. Do not stand close to the capacitors. In case of eye contact, rinse the open eye(s) with clean water immediately. In case of ingestion, gargle with water immediately, do not swallow. Do not touch electrolyte but wash skin with soap and water in case of skin contact.

## DEFINITION OF ELECTRICAL PARAMETERS

Separate documents as application notes, equivalent circuit diagrams and so on are available on request.

## PACKAGING

Please refer to the data book for details. Further information is available on request.

## DISPOSAL

Scrapped capacitors are classified as scrapped metal. For disposal they are handled as controllable industrial waste because of the nature of the contents (electrolyte). Most of the material is aluminum and cannot be completely burned.

Jianghai Europe Electronic Components GmbH

## JIANGHAI EUROPE

Electronic Components GmbH



ENGINEERED SOLUTIONS

Customer specific adaptations needed? Please contact Jianghai Europe GmbH:  
TELEFON: +49 (0) 2151 652088-72 | E-MAIL: [INFO@JIANGHAI-EUROPE.COM](mailto:INFO@JIANGHAI-EUROPE.COM)

11/12  
v2019.1

## ABOUT US: CAPACITORS FROM JIANGHAI

JIANGHAI EUROPE ELECTRONIC COMPONENTS GMBH IS THE EUROPEAN SALES ORGANIZATION OF NANTONG JIANGHAI CAPACITOR CO., LTD., NANTONG (CHINA). SINCE 2004, SALES, MARKETING, TECHNICAL SUPPORT, CUSTOMER SERVICE TEAM AND WAREHOUSE OF JIANGHAI EUROPE ELECTRONIC COMPONENTS GMBH ARE LOCATED IN KREFELD AND KEMPEN (GERMANY).

### » ELECTROLYTIC CAPACITORS

Jianghai has grown since its foundation in 1958 to become the largest Chinese manufacturer of aluminum capacitors generating revenues of more than 450 million USD in 2018. While Jianghai started in the beginning with the production of specialty chemicals (e.g., electrolyte solutions), it entered the production of aluminum electrolytic capacitors already in 1970.

### » INTEGRATION OF PREMATERIAL

More recently, Jianghai extended its production range by integrating high and low voltage anode foil etching and forming facilities. All factories are located in mainland China: the most important ones are in Nantong (north to Shanghai), in Inner Mongolia, and in XiAn area. Jianghai is well prepared for further expansion due to its successful entrance to the stock market in summer 2010.

### » FILM CAPACITORS

Jianghai's product range comprises aluminum electrolytic capacitors in screw terminal, snap-in and radial leaded styles. In 2012, the product portfolio was complemented by a range of power film capacitors. For this new business unit, Jianghai also follows the strategy of vertical integration and thus the production will extend from the preparation of the plastic film to the assembly of the finished goods. The product portfolio of DC-Link and Snubber capacitors has been enlarged in the year 2016 by AC-film capacitors. Highly automated production facilities ensure the efficient mass production of film capacitor modules. Driven by the thriving electric vehicle market in China, Jianghai has attained a leading position for the supply of these customer specific components.

### » POLYMER CAPACITORS

The year 2013 was marked by a major breakthrough in R&D for polymer aluminum electrolytic capacitors: the voltage proof for these ultra-low ESR products was pushed out to as much as 200V, enabling the utilization of these advanced capacitors in more applications, e.g. in white goods, industrial automation, telecom infrastructure, power supplies, and LED ballasts.

### » CAPACITOR COMPETENCE CENTER

Global presence of experienced sales and technical marketing experts at offices in Europe, Asia and the Americas ensure the local support of our customers based on sound know-how in all project phases. In 2014 Jianghai Europe has established an additional service for its customers in Europe: Experts for capacitors are awaiting telephone calls or emails at the CCCenter as a kind of hotline for all kind of technical requests.

### » CUSTOMIZED PRODUCTS

Jianghai's particular strength as a volume manufacturer is to offer customized products. Jianghai focuses on the demanding professional industrial segment with many power electronics applications. Research and development in collaboration with several specialized university institutes as well as the access to all vital pre-materials enable Jianghai to create engineered, customized solutions to fit smoothly into a specific application.

Jianghai is continuously improving processes, thereby enhancing the quality of its products and services. The list of certificates awarded to Jianghai reflects its level of achievement. In the year 2013, the Jianghai Europe sales office has become certified according to ISO9001 and ISO14001.

### » CONTACT

Jianghai Europe Electronic Components GmbH

Phone +49 (21 51) 65 20 88 – 0

Fax +49 (21 51) 65 20 88 – 88

E-Mail [info@jianghai-europe.com](mailto:info@jianghai-europe.com)

URL [www.jianghai-europe.com](http://www.jianghai-europe.com)