

# TRANSITIONS 1



1800  
LATTE



5700  
SAND BANK



6700  
SUNBURST



6800  
FIRESTONE



7500  
METAL



7700  
ACACIA




7550  
MINERAL GREY



7800  
OXIDE



7900  
MIDNIGHT

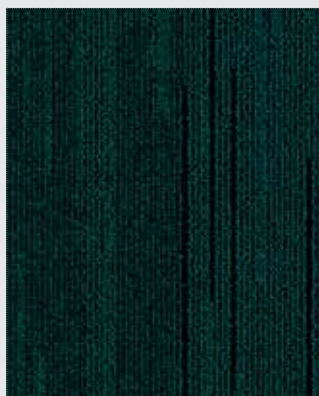

8800  
NORDIC SEA



9300  
OASIS

## TRANSITIONS 1

## Technical Specifications

Country of Origin	Australia
Description	Patterned Cut Pile Carpet Tile
Colours	11 Standard
Yarn	100% BCF Yarn Dyed Nylon
Gauge	39.4/10cm (5/10th Gauge)
Product Thickness	7.0mm (+/- 1.0mm)
Pile Weight	17oz/yd <sup>2</sup>
Backing Structure	Enviro Bac® Minimum of 60% recycled content
Product Size	250mm x 1000mm Skinny Plank
Availability Options	500mm x 500mm tile 500mm x 1000mm plank Enviro Bac Plus® - Cushion backed
Installation Method	Ashlar, Herringbone
Co-ordinating Products	Transitions 2 & Transitions 3

## Performance

Anti-static	AATCC 134 <3.5 Kilovolts at 21°C & 20% Relative Humidity
Flammability#	CRF 9.8 kW/m <sup>2</sup> (Direct Stick) Smoke Value 79% minutes
Colourfast to Light	6-7 (Minimum Mandatory Performance for ACCS:5)
Light Reflectance Values	Available on Request
Stain Resistance^	Stain Warden®
Biocontaminant Control#	Bioshield® Antimicrobial Control
ACCS Rating#	Contract Extra Heavy Duty & Stairs #17052
Guarantee*	15 Year

## Sustainability

PVC Minimisation	100% PVC Free
Recycled Content	Minimum 60% recycled content in backing structure Minimum of 40% recycled content by weight of product
Indoor Air Quality#	Green Building Council compliant for VOC emission rate limits
Product Stewardship	This product is recyclable and qualifies for takeback at the end of life under the Godfrey Hirst Product Stewardship Program
Green Star	Environmental Certification Scheme (ECS) Level 4 maximum points - certificate #17052
Accreditation	Manufactured under a quality, environmental and health and safety system certified and complying with ISO9001, ISO14001 and AS4801 by an accredited certification body.



\*#Test results are available on request.  
Specifications and colourations are subject to manufacturing tolerances. As part of Godfrey Hirst's continuous improvement program, Godfrey Hirst reserve the right to change the specifications of or delete colours of this product without notice.  
All Godfrey Hirst carpet tile and plank products must be installed in accordance with the latest AS2455 (Parts 1 & 2) and the Godfrey Hirst Carpet Tile Installation Instructions.

While all care is taken, product images may vary in colour due to possible printing process variation. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

\*This guarantee is in addition to any rights consumers may have under Australian consumer laws. Terms and conditions apply - for full information in respect to the scope of the guarantee please contact your Godfrey Hirst Account Manager or our Head Office."