



GOOSENECK HITCHES

Tested. Proven. Safe.

CURT products are thoroughly tested and proven safe to give you confidence for the road ahead.

Our goal isn't just to offer a stronger hitch or a more dependable wiring harness. We want to give you the means to enjoy your lifestyle. That is why we continue to pursue excellence and innovation in our products, maintaining dedicated engineering teams and testing facilities.

Whether you're towing 30,000 pounds or packing up for a weekend getaway, CURT offers you the freedom to pursue your passion and the peace of mind to enjoy every mile of it.

Sold / Installed By

For more information, talk to a sales associate or go to curtmfg.com.

ORIGINAL DOUBLE LOCK GOOSENECK HITCH

- Double locking pins for superior trailer and trailer ball security
- Flip-and-store ball keeps truck bed free of obstructions




X5 GOOSENECK TO 5TH WHEEL ADAPTER PLATES

- Simple, secure design allows for fast installation and removal as needed
- For use with CURT and competitive 5th wheels up to 20,000 lbs.



5TH WHEEL RAIL GOOSENECK HITCHES

- Allows pickup trucks equipped with 5th wheel rails to tow gooseneck trailers
- Mounts to all industry-standard 5th wheel rails
- Four-pin install and removal for truck bed access
- Features a welded 2-5/16" trailer ball
- Tested for safety in accordance with SAE J2638

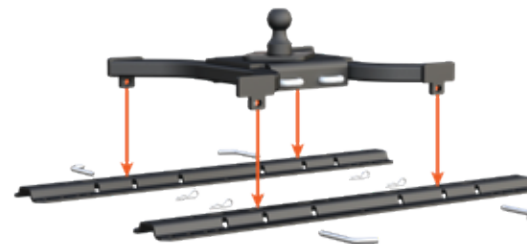

TOWING ELECTRICAL

Brake controls

- Inertia and time-based units available, easily calibrated for all towing needs



Wiring extensions

- Routes 7-way RV blade to truck bed while retaining use of rear socket



99089-RE
03/19/2019



curtmfg.com

6 12314 99089 4



OEM PUCK SYSTEM GOOSENECK KITS

- Drop-in install eliminates the need for tools
- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
- Tested for safety to U.S. VESC V-19 specs
- Limited lifetime warranty

Each kit includes:

- 2-5/16" gooseneck ball (3" ball #60628 also available)
- Two safety chain anchors
- Rubber hole cover
- Durable storage case



Step 1 - Lift and twist latch to release the retention balls



Step 2 - Drop in ball and return latch to lock in place



Step 3 - Drop in each anchor and twist 1/4-turn



Step 4 - Secure with the provided linchpins



Scan to see our Double Lock EZr™ feature video or visit our YouTube channel

30k
GTW

OEM-STYLE GOOSENECK HITCHES

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
- Easy, one-person installation requires no lowering of exhaust or spare tire (#60700)
- No drilling except the truck bed holes
- Installation also requires no welding, bed flange trimming or bed removal
- Included patented 2-5/16" ball eliminates the need for a side handle
- Heavy-duty 5/8" safety chain loops for a reliable connection
- Tested for safety in accordance with SAE J2638
- Protected by a highly durable, rust-resistant, liquid A-coat
- Limited lifetime warranty



60626



60614



60700

DOUBLE LOCK EZr™ GOOSENECK HITCH SYSTEM

- Easy one-person install with no measuring required
- Flip-and-store ball frees up the truck bed
- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
- Tested for safety in accordance with SAE J2638
- Limited lifetime warranty



Shown with installation brackets

Easy installation with patented Center Locator



Step 1 - Place the Center Locator into the gooseneck hitch ball hole



Step 2 - Bolt the installation brackets and hitch to the vehicle frame



Step 3 - Drill a pilot hole up from under the bed, using the Center Locator



Step 4 - Use the pilot hole to drill down with no measuring required