



1-ELLING

SECURELATCH™

EXECUTE

SERIES

Tested. Proven. Safe.

CURT products are thoroughly tested and proven safe to give you confidence for the road ahead.

Our goal isn't just to offer a stronger hitch or a more dependable wiring harness. We want to give you the means to enjoy your lifestyle. That is why we continue to pursue excellence and innovation in our products, maintaining dedicated engineering teams and testing facilities.

Whether you're towing 30,000 pounds or packing up for a weekend getaway, CURT offers you the freedom to pursue your passion and the peace of mind to enjoy every mile of it.

Sold / Installed By



99299-RA 12/30/2019



SECURELATCH™ LUNETTE RINGS & CHANNELS

- Cast iron build is austempered for superior strength and wear resistance
- Mounting hardware included with #48641 kit only
- Battleship grey finish for excellent exterior durability (lunette rings only)
- Bright gold zinc-plated pin



60K lbs. Flush

mount



25K lbs. channel







Drop-in pin accepts lock to deter theft (turns 90 degrees while coupled)



40K lbs. 2-3/4" channel






Vertically offset base allows ring to be flipped for maximum height adjustment

IMPROVE YOUR TOWING EXPERIENCE WITH REBELLION™ XD


To maximize comfort, control and confidence on the road, the SecureLatch™ series is also compatible with our innovative Rebellion™ XD a cushion hitch that reduces jarring and noise using ShockDrop™ technology.

- Minimizes stress on tow vehicle's suspension and brakes for extended longevity
- Improved trailer control during events of sudden braking
- Virtually maintenance-free with no airbag or bearings to service
- Lighter-weight design for less stress on the trailer hitch receiver







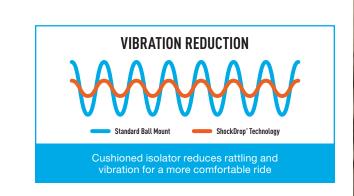











HOW IT WORKS

1 - Strike the plate.


As you back up the vehicle, a built-in back plate helps position the coupler or lunette ring for easier hookup.

2 - Drop the coupler.

As the coupler is lowered onto the pintle hitch, SecureLatch™ automatically locks without any manual coupling required.

3 - Tow with confidence.

Finally, insert the secondary safety pin, connect the safety chains and you're ready to tow with confidence.




SECURELATCH™ PINTLE HOOKS AND HITCHES

- Auto-locking system secures primary latch without manual coupling required
- Non-shank models fit SecureLatch™ or standard pintle mounts
- Cast iron build is austempered for superior strength and wear resistance
- Battleship grey finish for excellent durability



Built-in back plate helps position lunette ring for easier hookup





Integrated, intermediate safety chain hangers keep chains off the ground

SECURELATCH™ ADJUSTABLE MOUNTS

- Torqued bolt plates provide 48,000 lbs. total clamp load for secure connection
- Accepts SecureLatch™ pintle hooks and ball hitches (sold separately)
- Cast iron build is austempered for superior strength and wear resistance (2" shank)
- Fabricated steel construction (2-1/2" shank)



Slotted bolt plate for quick, easy, one-tool height adjustments – no disassembly required

A SOLUTION FOR EVERY TOWING NEED



Hook: 14K lbs. Ball: 10K lbs. 2" ball / 2" rec



Hook: 14K lbs. Ball: 14K lbs. 2-5/16" ball / 2" rec



Hook: 20K lbs. Ball: 10K lbs. 2" ball



Hook: 20K lbs. Ball: 14K lbs. 2-5/16" ball



Ball: 14K lbs. 2-5/16" ball



14K lbs. 2" rec



30K lbs.



50K lbs.



24K lbs. 2" rec



30K lbs. 2-1/2" rec