

A large, semi-transparent CURT logo is overlaid on the center of the image. It includes the stylized icon and the word "CURT" in a bold, orange, sans-serif font.

Gooseneck Hitches

OEM Puck System Gooseneck Kits

- Available for Chevrolet, Ford, GMC, Nissan and Ram
- Kits include ball, anchors, rubber hole cover and durable storage case
- Heavy-duty, forged anchors with large chain hook openings
- Simple, drop-in installation eliminates the need for tools
- Tested for safety to meet U.S. VESC V-19 specifications
- 2-5/16" and 3" balls available
- Limited lifetime warranty





GOOSENECK HITCHES



OEM-Style Gooseneck Hitches

- Available for Chevrolet, Ford, GMC and Ram
- Requires no additional hardware or installation brackets
- No drilling except the truck bed holes
- Installation also requires no welding, bed flange trimming or bed removal
- Easy, one-person installation on select models (all others install in 45 minutes or less)
- Patented 2-5/16" ball quickly installs with 1/4-turn latch-locking system
- Heavy-duty 5/8" safety chain anchors offer a secure hold for large trailers
- Protected by a highly durable, rust-resistant, liquid A-coat
- Tested for safety in accordance with SAE J2638



Ram



GM



Ford

Double Lock EZr™ Gooseneck Hitch

The CURT Double Lock EZr™ gooseneck hitch is designed to be faster and easier to install than any other gooseneck hitch on the market.

- One-person installation
- No measuring required
- Flip-and-store ball
- Optimum strength
- Tested for safety in accordance with SAE J2638
- Limited lifetime warranty



What makes the EZr™ different?

One-Person Installation

- Retainer clips secure the bolts supporting the center section while attaching the installation kit
- Uses carriage bolts when possible for one-wrench tightening
- No need to lower exhaust on Ford, GM and most Dodge / Ram models
- No need to relocate cable hanger and ground wire on Dodge / Ram models
- No welding or truck bed removal required



Retainer clips secure the bolts supporting the center section while attaching an installation kit

What makes the EZr™ different?

No Measuring Required

- Exclusive Center Locator eliminates the need to measure where the ball hole should be
- Safety chain loop holes are drilled from the underside of the truck bed
- No sheet metal cutting required along the inside of the fender to insert rails
- Center Locator covered by patent# D685,299 S



Exclusive center locator saves time




Simply drill up from under the bed



Use the pilot hole for error-free drilling

Screenshots from competitor installation video

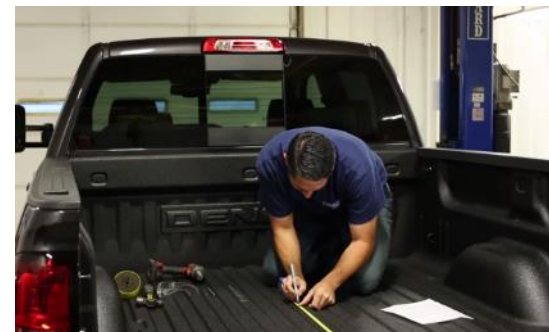

How does the Center Locator work?



1. Place it into the ball hole and mount the center section



2. Drill a pilot hole up from under the truck bed



3. Use the pilot hole for error-free drilling
Orange shavings indicate when to stop drilling

What makes the EZr™ different?

Flip-and-Store Ball


- Keeps truck bed free of obstructions and helps avoid trailer ball loss
- Double-lock pins for superior strength
- Rubber trim and hole cover provide protection and prevent corrosion
- Removable chrome-plated 2-5/16" trailer ball fits most gooseneck trailers
- Tested for safety in accordance with SAE J2638



Ball up,
ready for coupling



Ball stored,
without rubber cover

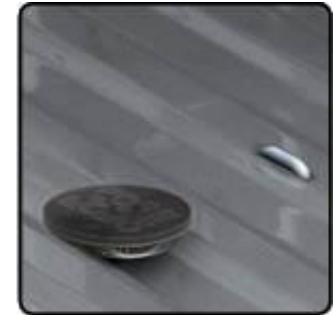

Ball protected
with included cover



What makes the EZr™ different?

Optimum Strength

- Up to 30,000 lbs. GTW
7,500 lbs. vertical load
- Strong 5/8" safety chain loops and 3/8" operating handle
- Protected by a highly durable carbide powder coat finish
- Meets proposed SAE J2638 testing protocols
- Limited lifetime warranty

Double Lock EZr™ components



Competitor components





GOOSENECK HITCHES



Original Double Lock™ Gooseneck Hitch

- Double locking pins for superior trailer and trailer ball security
- Flip-and store ball keeps truck bed free of obstructions
- Installation requires no welding or truck bed removal
- Heavy-duty handle can be positioned on either side of the vehicle
- Rubber hole cover helps prevent corrosion in trailer ball hole
- Protected by a durable carbide powder coat finish
- Tested for safety in accordance with SAE J2638



Original Double Lock™ Accessories



Replacement ball



Raised ball (1" rise)



Offset ball (4" offset)



Rubber hole cover



Installation tool

RockerBall™ Cushion Hitch Gooseneck Ball

- Cushioned isolator improves ride comfort for animals and passengers
- Simple, drop-in installation to easily replace traditional gooseneck ball
- Virtually maintenance-free with no airbag or bearings to service
- 2-5/16" diameter ball couples to most gooseneck trailers
- Rated for up to 30,000 lbs. GTW and 7,500 lbs. vertical load limit
- Tested for safety to meet SAE J2638 specifications
- Patent pending



SHOCKDROP™ TECHNOLOGY

Reduces jerking and jarring and promotes truck longevity



#60654

VERSATILE COMPATIBILITY

Compatible with CURT and B&W gooseneck hitches with round or square holes




ADVANCED ENGINEERING

Offset pin dampens vertical chucking and fore-aft motion during starts and stops



DURABLE CONSTRUCTION

Durable carbide black powder coat base with a chrome-plated ball

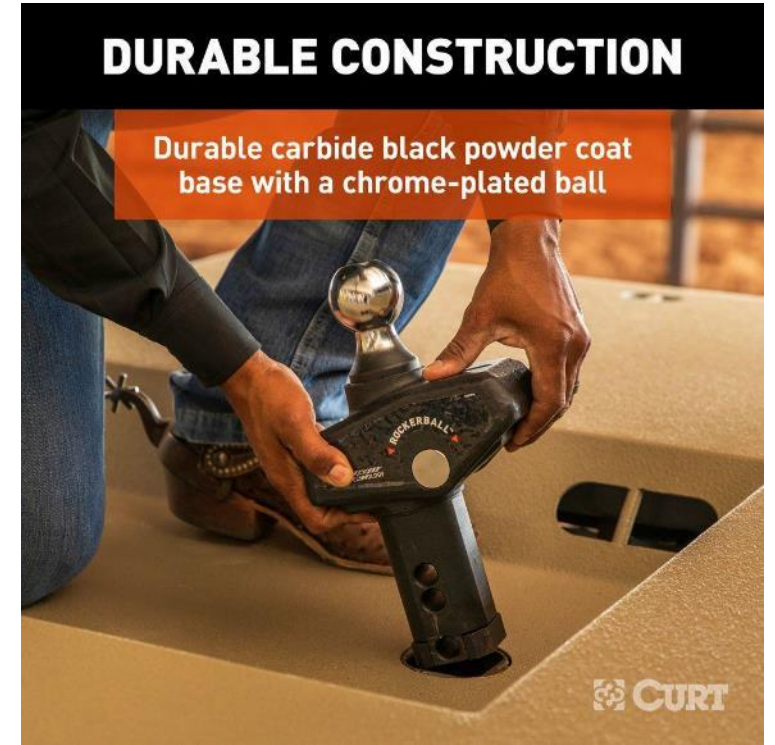

*For B&W models, hitch must accept gooseneck ball with 2" from the bottom of the shank to center of locking pin hole

Folding Ball Gooseneck Hitches

- Folding ball design keeps truck bed free of obstructions
- Permanently attached gooseneck ball cannot be loosened or stolen
- Chrome-plated 2-5/16" trailer ball fits all standard gooseneck trailers
- Protected by a highly durable carbide powder coat finish
- Under-bed patent# D656,437 and D664,076
- Over-bed patent# 5,571,270; 5,755,452; 5,435,585

Over-bed option



Under-bed option

Fixed Ball Gooseneck Hitch

- Reinforcement required to reach max gross trailer weight rating
- Protected by a highly durable carbide powder coat finish



Custom Brackets

- Weight ratings are limited to vehicle manufacturer's stated capacities
- Vehicle-specific design optimizes strength and installation time
- Protected by a rust-resistant liquid A-coat
- Includes grade-8 mounting hardware



X5™ Gooseneck-to-5th-Wheel Adapter Plates

- Converts a gooseneck hitch into a set of standard 5th wheel base rails
- Simple, secure design allows for fast installation and removal as needed
- For use with CURT and competitive 5th wheels up to 20,000 lbs.
- Accepts any standard CURT 5th wheel legs or roller (excludes OEM puck system)
- Carbide powder coat finish and co-cured in a rust-resistant liquid A-coat
- Available to fit Double Lock™, EZr™ and B&W Turnoverball®





GOOSENECK HITCHES



5th Wheel Rail Gooseneck Hitches

- Allows pickup trucks equipped with 5th wheel rails to tow gooseneck trailers
- Mounts to all industry-standard 5th wheel rails
- Four-pin installation and removal for easy truck bed access
- Features a welded 2-5/16" trailer ball
- #16055 can be positioned over the axle or flipped to provide a 3" rearward offset
- Includes safety chain hookups, pins & clips
- Protected by a durable carbide powder coat finish



Limited Lifetime Warranty

- CURT provides limited lifetime warranty coverage against defects in factory workmanship and materials for CURT products sold by authorized CURT dealers for use by retail (end use) consumers.
- https://storage.googleapis.com/curt-group-warranties/CURT_Warranty_2018.02.09.pdf

Product	Workmanship & Materials	Components & Parts	Finishings & Coatings
Hitches	Lifetime	One-year	One-year
Brake controls	Lifetime	One-year	One-year
Electrical and wiring	One-year	One-year	One-year
Other accessories	Lifetime	One-year	One-year



LIMITED LIFETIME WARRANTY

CURT MANUFACTURING, LLC ("CURT") provides limited lifetime warranty coverage against defects in factory workmanship and materials for CURT® products ("Products") sold by authorized CURT dealers for use by retail (end use) consumers. This Limited Warranty is provided only to the original Product consumer, and applies only to the original installation. This Limited Warranty is not transferable and does not extend or apply to anyone else. For consumers in the U.S., this Limited Warranty gives you specific legal rights; you also may have other rights, which vary from state to state.

This Limited Warranty is the sole and exclusive warranty provided by CURT, and all other warranties and conditions are excluded and disclaimed. **UNDER THE LAW OF CERTAIN STATES, THERE MAY BE NO IMPLIED CONDITIONS OR WARRANTIES FROM CURT APPLICABLE TO YOUR PRODUCT, AND ALL IMPLIED CONDITIONS OR WARRANTIES (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) ARE EXCLUDED AND DISCLAIMED WHERE ALLOWED BY LAW.** If implied warranties are imposed under any applicable state law, all such implied warranties are limited to the duration of the applicable provisions of this Limited Warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

COVERED PRODUCTS AND LIMITATIONS

CURT provides the following Limited Warranty coverage:

Product	Workmanship & Materials	Components & Parts	Finishings & Coatings
Hitches	Lifetime	One-year	One-year
Brake controls	Lifetime	One-year	One-year
Electrical and wiring	One-year	One-year	One-year
Other accessories	Lifetime	One-year	One-year

Each of the warranty coverage periods runs from the date of purchase of the Product (year of purchase is required), and applies only to warranted defects that first occur and are reported to CURT within the applicable warranty period. CURT retains the right to determine to its reasonable satisfaction whether any claimed defect is covered by this Limited Warranty.

Certain items are excluded from Limited Warranty coverage by CURT, and this Limited Warranty coverage does not apply to:

- Wear and tear from normal use, including damage from road debris
- Improper product selection, application, installation or maintenance

- Modifications, including the attachment of other hardware or components
- Misuse, abuse, overloading, improper handling or handling, accident
- Corrosion or damage due to environmental conditions

REMEDIES UNDER THIS LIMITED WARRANTY

If a defect covered by this warranty occurs, CURT will repair or replace the Product, or refund the purchase price, in its sole discretion. This "repair, replacement or refund" remedy is the sole and exclusive remedy under this Limited Warranty. CURT has no responsibility or liability for any incidental or consequential damages, such as loss of use of vehicles or trailers, towing charges, storage charges, the carriage, labor and service charges for removing or reinstalling products, loss of or damage to personal property, or interest or finance charges, all of which are specifically excluded and disclaimed from this Limited Warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

RESPONSIBILITY OF PURCHASER

The Purchaser must have proof of purchase to obtain service under this Limited Warranty. Contact CURT for a Returned Goods Authorization (RGA) and return instructions. CURT will not accept Products unless an RGA has been issued. The Purchaser must deliver the Product to CURT or an authorized CURT dealer along with the RGA number and proof of purchase.

The CURT Limited Warranty policy in effect on the date you purchased your Product determines the applicable warranty coverage, and subsequent or prior CURT warranties are not applicable to your Product. The terms of this Limited Warranty cannot be changed or modified, except by a written agreement signed by an officer of CURT. CURT reserves the right to improve its products through changes in design or materials without being obligated to the owners of the Products of the same or similar models.

Contact information:
CURT Headquarters
 6208 Industrial Drive
 Eau Claire, WI 54701
 800.798.0813