



# Bring It



## GOOSENECK HITCHES

Scan for live  
digital version



The CURT gooseneck hitch line embodies the quality craftsmanship and intelligent design that we pour into each one of our products. CURT gooseneck hitches are built to be effective, easy to use and long-lasting to keep your customers committed to your business and satisfied with our brand.

We are proud to introduce a line of gooseneck hitch kits that will add convenience and ease when purchasing. These complete packages include the gooseneck head, installation kit and necessary hardware, all under one part number.

CURT continues to offer many gooseneck hitches, including our Double Lock EZr, Folding Ball and 5th wheel adapters. To better meet the needs of your business, we carry installation kits that are designed to fit multiple under-bed hitch models, allowing you to stock a wide variety of hitches while keeping inventory requirements low.

From under-bed to over-bed, our tried and true designs are made with both the dealer and installer in mind, focusing on furthering your success while helping your customers Bring It®!

### New to the CURT gooseneck hitch line!



Factory-style safety  
chain anchors



Gooseneck hitch  
and install kits



Installation kits are  
made in the USA





# FACTORY-STYLE GOOSENECK BALL AND SAFETY CHAIN ANCHORS

**NEW**

## Safety Chain Anchors


- Requires factory tow package to install into the vehicle
- Never exceed vehicle's maximum gross weight rating
- Simple drop-in installation, no tools required
- Heavy-duty, forged hooks with large chain hook openings
- Durable powder coat finish
- Patent pending

## Gooseneck Ball


- Up to 30,000 lbs. GTW and 7,500 lbs. vertical load
- Easy installation with 1/4 turn latch-locking system
- Chrome-plated
- Patent pending



Bulk#	Make	Ball Size	Description	Finish
60608 <b>NEW</b>	Ford	--	Safety chain anchors	Gloss black
60617 <b>NEW</b>	RAM	--	Safety chain anchors	Gloss black
60601	--	2 5/16"	Factory-style replacement ball	Chrome-plated

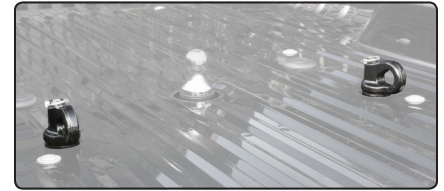

60608 installed in Ford truck bed - 60601 gooseneck ball not included



60608 Ford anchor with safety chain



60617 RAM anchor with safety chain

**30k**  
GTW

# FACTORY-STYLE GOOSENECK BALL AND SAFETY CHAIN ANCHOR KITS

## Kit Includes

- Safety chain anchors
- Gooseneck ball
- Rubber hole cover
- Durable storage case

## Gooseneck Ball

- Up to 30,000 lbs. GTW and 7,500 lbs. vertical load
- Easy installation with 1/4 turn latch-locking system
- Chrome-plated
- Patent pending

## Safety Chain Anchors

- Requires factory tow package to install into the vehicle
- Never exceed vehicle's maximum gross weight rating
- Simple drop-in installation, no tools required
- Heavy-duty, forged hooks with large chain hook openings
- Durable powder coat finish
- Patent pending



60618 RAM safety chain anchors and gooseneck ball installed in truck bed



60601 Factory-style gooseneck ball operates with a simple, 1/4-turn latch-locking system



Pkg#	Make	Ball GTW / Vertical Load	Ball Size	Ball Finish	Anchor Finish
60609 <b>NEW</b>	Ford	30,000 / 7,500 lbs.	2 5/16"	Chrome-plated	Gloss black
60618 <b>NEW</b>	RAM	30,000 / 7,500 lbs.	2 5/16"	Chrome-plated	Gloss black

**30K**


GTW

## RAM 2500 & 3500 GOOSENECK HITCHES

- Never exceed vehicle's maximum gross weight rating
- Factory-style gooseneck trailer ball for quick and easy removal
- Quickly bolts in from underneath the truck bed in 45 minutes or less
- Requires no additional hardware or installation kits
- Includes heavy-duty, 5/8" safety chain loops



60613



60601



60614

60601 factory-style gooseneck ball operates with a simple, 1/4-turn latch-locking system

Bulk#	GTW / Vertical Load	Ball Size	Description	Years	Finish
60613	30,000 / 7,500 lbs.	2 5/16"	RAM 3500 gooseneck hitch	13 - 14	Carbide
60614	30,000 / 7,500 lbs.	2 5/16"	RAM 2500 gooseneck hitch	2014	Carbide
60601	30,000 / 7,500 lbs.	2 5/16"	Factory-style replacement ball	--	Chrome-plated

**20K**

GTW

## X5 GOOSENECK TO 5TH WHEEL ADAPTER PLATES

- Converts Double Lock and competitive gooseneck hitches to 5th wheel rails
- For use with CURT and other common 5th wheel hitches up to 20,000 lbs.



16210 - round shank



16220 - round shank



16310 - square shank

Bulk#	Shank Style	Fits
16210	Round shank	CURT 60607, 60615, 60620, 60625
16220	Round shank	CURT EZr 60611 and 60612
16310	Square shank	Competitive products



Replaces Double  
Lock trailer ball



Quickly provides  
5th wheel rails



Accepts 5th wheel  
hitches and rollers



# UNDER-BED DOUBLE LOCK EZr™ GOOSENECK HITCH & INSTALLATION KITS

Installation kit required.  
See table below



Retainer clips secure the bolts supporting the center section while attaching an installation kit



Exclusive center locator saves time




Simply drill up from under the bed



Use the pilot hole for error-free drilling



Ball up, ready for coupling



Ball stored, without rubber cover



Ball stored, rubber cover included

## EASY TO INSTALL

### Exclusive Center Locator

- Eliminates the need to measure where the ball hole should be
- Eliminates errors caused by drilling
- **Orange** shavings indicate when to stop drilling the trailer ball hole
- Patent# D685,299 S

### Optimum Strength

- Up to 30,000 lbs. GTW  
7,500 lbs. vertical load  
Never exceed vehicle's max GTW
- Strong, spring-loaded 5/8" safety chain loops and grade 8 hardware
- Fortified center section
- Meets proposed SAE J2638 testing standards

### EZr™ Installation Kits

- Designed for fast, easy installation
- No need to lower exhaust on Ford, Chevy or most Dodge / RAM trucks
- No need to relocate cable hanger and ground wire on Dodge / RAM trucks
- Uses carriage bolts when possible so only one wrench is needed
- Eliminates sheet metal cutting along inside of fender to insert rails
- No measuring required - safety chain loop holes are drilled from the underside of the truck bed

### One-Person Installation

- Retainer clips secure the bolts to support the center section while attaching the installation kit

## EASY TO USE

### Flip-Over Ball

- Flip-and-store ball helps avoid trailer ball loss and keeps truck bed free of obstruction
- Chrome trim ring for a finished look
- Rubber trim and hole cover provide protection and prevent corrosion

### Sturdy, Reversible Handle

- Heavy-duty handle can be positioned on either side of the truck

### Double Lock Security

- Double-locking pins in trailer ball provide peace of mind

### Limited Lifetime Warranty

Pkg#	Description	Make	Ball Size	Finish	GTW / Vertical Load
<b>Double Lock EZr Gooseneck Hitches</b>					
60611	Double Lock EZr gooseneck hitch	Chevrolet / GMC	2 5/16"	Carbide	30,000 / 7,500 lbs.
60612	Double Lock EZr gooseneck hitch	Dodge / RAM and Ford	2 5/16"	Carbide	30,000 / 7,500 lbs.
<b>Double Lock EZr Gooseneck Installation Kits</b>					
Bulk#	Make	Model	Years	EZr Part#	Notes
60605	Chevrolet / GMC	Silverado / Sierra 2500 and 3500	11 - 15	60611	1, ✗
60660	Dodge / RAM	RAM 2500	03 - 13	60612	1, 2, 3, ✗
60660	Dodge / RAM	RAM 3500	03 - 12	60612	1, 2, 3, ✗
60645	Ford	F-250 and F-350 Super Duty	11 - 15	60612	✗
60647	Ford	F-250 and F-350 Super Duty	99 - 10	60612	✗

1. The passenger side wheel well flange must be bent for frame rail access

2. Exhaust may have to be permanently lowered on power wagon and mega cab applications

3. Check inverted ball clearance with heavy loads on two-wheel drive

✗ = No frame drilling required



30K

GTW

## UNDER-BED DOUBLE LOCK GOOSENECK HITCHES

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load  
Never exceed vehicle's maximum gross weight rating
- Flip-and-store ball helps avoid trailer ball loss and keeps truck bed free of obstruction
- Heavy-duty handle can be positioned on either side of the vehicle
- Double-locking pins in trailer ball provides peace of mind
- Removable, chrome-plated 2 5/16" trailer ball
- Chrome-plated trim ring provides a finished look
- Rubber trim and hole cover provide protection and prevent corrosion
- Spring-loaded safety chain loops and grade 8 hardware included
- Durable carbide powder coat finish
- **Limited lifetime warranty**




60607


Installation kit required. See guide on page 221



Ball up,  
ready for coupling



Ball stored,  
without rubber cover



Ball stored, rubber  
cover included



60615



60620



60625

Pkg#	Description	Make / Model	Years	Ball Size	Finish	GTW / Vertical Load
60607*	Double Lock gooseneck hitch	Fits all applications not listed below	--	2 5/16"	Carbide	30,000 / 7,500 lbs.
60615	Double Lock gooseneck hitch	Chevrolet 1500, new body	07 - 14	2 5/16"	Carbide	30,000 / 7,500 lbs.
60620	Double Lock gooseneck hitch	Nissan Titan	04 - 12	2 5/16"	Carbide	30,000 / 7,500 lbs.
60625	Double Lock gooseneck hitch	Toyota Tundra	00 - 06	2 5/16"	Carbide	30,000 / 7,500 lbs.

Installation kit required for these products, see guide on page 221

\* Attractive, full-color retail packaging

## UNDER-BED DOUBLE LOCK GOOSENECK HITCH ACCESSORIES

- Trailer balls fit all Double Lock gooseneck hitches
- Add clearance and make installation easier with gooseneck hitch accessories



60616



60602



60603



60606

Bulk#	Pkg#	Description	Ball Size	Ball Rise	Ball Offset	GTW / Vertical Load
60616	--	Replacement ball for all Double Lock gooseneck hitches	2 5/16"	--	--	30,000 / 7,500 lbs.
--	60602	Moves pivot point rearward for added cab clearance	2 5/16"	--	4"	20,000 / 5,000 lbs.
--	60603	Added clearance for trucks with plastic or rubber bed liners	2 5/16"	1"	--	30,000 / 7,500 lbs.
60606	--	Supports gooseneck hitch for one-person installation	--	--	--	--

**30K**  
GTW


# UNDER-BED DOUBLE LOCK GOOSENECK HITCH KITS

**NEW**

- **Easy to order!** Determine the make and model of the vehicle. One part number includes the gooseneck hitch and the installation kit
- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
- 2 5/16" flip-and-store ball helps avoid trailer ball loss and keeps truck bed free of obstruction
- Rubber trim and hole cover provide protection and prevent corrosion
- Grade 8 mounting hardware included
- Durable finish resists rust and corrosion
- **Limited lifetime warranty on gooseneck hitches**



60607  
gooseneck hitch

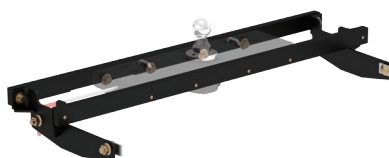

60604  
installation bracket



60710  
gooseneck hitch kit

Make / Model	Style	Years	Kit Part#	Hitch Part#	Rail Part#
<b>Chevrolet / GMC</b>					
1500 / 2500LD Silverado / Sierra	New body	07 - 14	60711	60615	60632
	Classic body	99 - 07	60712	60607	60652
2500HD / 3500 Silverado / Sierra	--	11 - 15	60710	60607	60604
	--	01 - 10	60712	60607	60652
2500 / 3500	Old body	99 - 00	60713	60607	60631
Full-size pickups	Excluding 34" frame (O.D.)	89 - 98	60713	60607	60631
<b>Dodge / RAM</b>					
RAM 1500	Air suspension	13 - 14	60731	60607	60658
	Excluding air suspension	09 - 14	60730	60607	60657
	--	02 - 08	60733	60607	60659
	--	94 - 01	60734	60607	60635
RAM 2500	--	03 - 13	60732	60607	60661
	--	03 - 12	60733	60607	60659
	--	94 - 02	60734	60607	60635
RAM 3500	--	03 - 12	60732	60607	60661
	--	03 - 12	60733	60607	60659
	--	94 - 02	60734	60607	60635
<b>Ford</b>					
F-150	--	04 - 14	60721	60607	60641
	--	97 - 03	60722	60607	60637
	--	80 - 96	60723	60607	60636
	Heritage Edition	2004	60722	60607	60637
F-250LD	New body	97 - 03	60722	60607	60637
	Old body	80 - 98	60723	60607	60636
F-250 / F-350 Super Duty	--	11 - 15	60720	60607	60644
	--	99 - 10	60720	60607	60644
F-350	Excluding overload springs	80 - 98	60723	60607	60636
	--	80 - 98	60723	60607	60636
F-450 Super Duty	Excluding Cab & Chassis	08 - 12	60720	60607	60644
<b>Nissan</b>					
Titan	--	04 - 12	60740	60620	60664
<b>Toyota</b>					
Tundra	6.5' bed	07 - 14	60751	60607	60667
	--	00 - 06	60750	60625	60665

\* Requires no additional hardware or installation kit



30K

GTW

## UNDER-BED QUICK GOOSE II GOOSENECK HITCHES

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load  
Never exceed vehicle's maximum gross weight rating
- Two-handle operation for raising and lowering ball eliminates the need to climb into the truck bed
- Drop-ball storage helps avoid trailer ball loss and keeps truck bed free of obstruction
- Chrome-plated 2 5/16" trailer ball
- Heavy-duty handles
- Chrome-plated trim ring provides a finished look
- Rubber trim and hole cover provide protection and prevent corrosion
- Spring-loaded safety chain loops and grade 8 hardware included
- Durable carbide powder coat finish
- Attractive, full-color retail packaging
- **Limited lifetime warranty**



60630


Installation kit required. See guide on page 221




Raise and lower the trailer ball without climbing in truck bed



Ball up, ready for coupling



Ball stored, without rubber cover



Rubber cover included

Pkg#	Description	Make	Ball Size	Finish	GTW / Vertical Load
60630	Quick Goose II gooseneck hitch	Chevrolet / GMC and Ford	2 5/16"	Carbide	30,000 / 7,500 lbs.
60640	Quick Goose II gooseneck hitch	Dodge / RAM and Ford	2 5/16"	Carbide	30,000 / 7,500 lbs.

Installation kit required for these products, see guide on page 221

30K

GTW

## UNDER-BED FOLDING BALL GOOSENECK HITCH

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load  
Never exceed vehicle's maximum gross weight rating
- Permanently attached trailer ball folds down and out of the way, eliminating theft or loss
- Bed remains flat and free of obstruction
- Spring-loaded safety chain loops and grade 8 hardware included
- Patent# D656,437 and D664,076
- Durable carbide powder coat finish
- Attractive, full-color retail packaging
- **Limited lifetime warranty**



61652


Installation kit required.  
See guide on page 221



Pull ball pin, raise cover



Lower ball, close cover

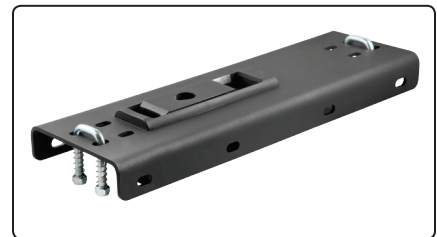

Ball stored

Pkg#	Description	Ball Size	Finish	GTW / Vertical Load
61652	Under-bed folding ball gooseneck hitch	2 5/16"	Carbide	30,000 / 7,500 lbs.

Installation kit required for this product, see guide on page 221

# UNDER-BED INSTALLATION KITS AND GOOSENECK GUIDE

- Rated to vehicle's maximum gross weight rating  
Never exceed vehicle's maximum gross weight rating
- Grade 8 mounting hardware included
- Designed to fit multiple vehicles and  
CURT goosenecks for reduce inventory



60667

Make / Model	Style	Years	Installation Kit Part#	Double Lock	Quick Goose II	Folding Ball	Notes
Chevrolet / GMC							
Silverado / Sierra 1500 / 2500LD	New body	07 - 14	60632	60615	--	--	✗
	Classic body	99 - 07	60652	60607	60630	61652	✗
Silverado / Sierra 2500HD / 3500	--	11 - 15	60604	60607	--	--	✗
		01 - 10	60652	60607	60630	61652	4, ✗
2500 / 3500	Old body	99 - 00	60631	60607	60630	61652	✗
Full-size pickup trucks	Excluding 34" frame (O.D.)	88 - 98	60631	60607	60630	61652	✗
Dodge / RAM							
RAM 1500	Air suspension --	13 - 14	60658	60607	--	--	✗
		09 - 14	60657	60607	--	--	✗
		02 - 08	60659	60607	60640	--	1,2, ✗
		94 - 01	60635	60607	60640	--	✗
RAM 2500	--	03 - 13	60661	60607	60640	--	1,2,6, ✗
		03 - 12	60659	60607	60640	--	1,2,6, ✗
		94 - 02	60635	60607	60640	--	6, ✗
RAM 3500	--	03 - 12	60661	60607	60640	--	1,2,6, ✗
		03 - 12	60659	60607	60640	--	1,2,6, ✗
		94 - 02	60635	60607	60640	--	6, ✗
Ford							
F-150	--	04 - 14	60641	60607	60630	61652	✗
		97 - 03	60637	60607	60630	61652	✗
		80 - 96	60636	60607	60630	61652	1, ✗
	Heritage Edition	2004	60637	60607	60630	61652	✗
F-250	New body	97 - 03	60637	60607	60630	61652	✗
	Old body	80 - 98	60636	60607	60630	61652	--
F-250 / F-350 Super Duty	--	11 - 14	60644	60607	60630	61652	3, ✗
		99 - 10	60644	60607	60640	--	3, ✗
		99 - 10	--	60607	60640	--	3, ✗
F-350	Excluding overload springs	80 - 98	60636	60607	60630	61652	✗
	--	80 - 98	60636	60607	60630	61652	--
F-450 Super Duty	Excluding Cab & Chassis	08 - 12	60644	60607	60640	--	3, ✗
		08 - 10	--	60607	60640	--	3, ✗
Nissan							
Titan	--	04 - 12	60664	60620	--	--	1, ✗
Toyota							
Tundra	6' 5" bed	07 - 14	60667	60607	--	--	5, ✗
	--	00 - 06	60665	60625	--	--	6, ✗

All models: Brake, fuel and electrical lines may need to be loosened or repositioned. Heat shield requires modification or removal.

1. Passenger side wheel well must be bent for frame rail access
  2. Parking brake cable bracket may require relocation
  3. Exhaust may have to be permanently lowered on '05 and newer models
  4. Vacuum canister requires relocation (kit included)
  5. Ball cannot be turned over, brake lines must be cable-tied (ties included)
  6. Check invert ball clearance with heavy loads on two-wheel drive
- ✗ = No frame drilling required



**30K**

GTW

## OVER-BED FOLDING BALL GOOSENECK HITCH

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load  
Never exceed vehicle's maximum gross weight rating
- Permanently attached trailer ball folds down and out of the way, eliminating theft or loss
- T-handle for easy use
- Spring-loaded safety chain loops and grade 8 hardware included
- Patent#: 5,571,270; 5,755,452; 5,435,585
- Attractive, full-color retail packaging
- **Limited lifetime warranty**



61052

**Installation kit required.  
See guide on page 223**



Pull ball pin, raise cover



Lower ball, close cover



Ball stored


Pkg#	Description	Ball Size	Finish	GTW / Vertical Load
61052	Over-bed folding ball gooseneck hitch	2 5/16"	Carbide	30,000 / 7,500 lbs.
Installation kit required for this product, see page 223				

**30K**

GTW

## OVER-BED FIXED BALL GOOSENECK HITCH

- Reinforcement required to reach max gross trailer weight rating
- Safety chain hook-ups sold separately
- Durable carbide powder coat finish



66113



61100

Bulk#	Description	Plate Size	Ball Size	Finish	GTW / Vertical Load
61100	Flat plate with fixed trailer ball	12" x 12"	2 5/16"	Carbide	30,000 / 7,500 lbs.
66113	Safety chain U-bolt kit	--	--	--	--

**Installation kit required.  
See guide on page 223**

**30K**

GTW

## OVER-BED FLAT PLATE GOOSENECK HITCH

- Reinforcement required to reach max gross trailer weight rating
- Durable carbide powder coat finish



65500

**Installation kit required.  
See guide on page 223**

Bulk#	Description	Plate Size	Ball Size	Finish	GTW / Vertical Load
65500	Flat plate with fixed trailer ball and two 1/2" forged D-rings	13" x 48"	2 5/16"	Carbide	30,000 / 7,500 lbs.

# OVER-BED INSTALLATION KITS

- Up to 30,000 lbs. GTW  
Never exceed vehicle's maximum gross weight rating
- Laser cut for precise fit
- Grade 8 mounting hardware included
- Designed to fit multiple vehicles and  
CURT goosenecks for reduce inventory



61321



61529



61301

Make / Model	Style	Years	30K Installation Kit Part#	Notes
Chevrolet / GMC				
1500 C/K series	Long bed	88 - 98	61503	--
	Short bed	88 - 98	61504	--
Silverado / Sierra 1500	New body	07 - 13	61331	--
	Classic body	99 - 07	61341	✗
2500 / 3500 C/K series	Long bed, old body	88 - 00	61503	--
	Short bed, old body	88 - 00	61504	--
Silverado / Sierra 2500HD / 3500	--	11 - 15	61301	✗
		01 - 10	61341	✗
Silverado / Sierra 2500LD	Classic body	99 - 07	61341	✗
Dodge / RAM				
RAM 1500	--	02 - 08	61319	✗
		94 - 01	61509	--
RAM 2500 / 3500	--	03 - 12	61529	--
		94 - 02	61509	--
Ford				
F-150	--	04 - 13	61321	✗
		97 - 03	61506	--
		80 - 96	61505	--
	Heritage Edition	2004	61506	--
F-250 / F-350	--	97 - 98	61505	--
		80 - 96	61505	--
F-250 / F-350 Super Duty	--	99 - 15	61332	✗
F-450 Super Duty	Excluding Cab & Chassis	08 - 11	61332	✗
Universal				
Universal rail kit	Raw finish	--	61502	--
✗ = No drill				

✗ = No drill



25K

GTW

# 5TH WHEEL RAIL GOOSENECK HITCHES

- Four-pin installation and removal for easy access to truck bed
- Spyder includes welded trailer ball, safety chain hookups and pins & clips
- Bent plate includes pins & clips and welded trailer ball with 3" offset from front to rear
- Mounts to all industry standard 5th wheel rails



16902



16085




16055




Attaches to  
5th wheel rails



Quickly provides  
gooseneck hitch



Attaches to  
5th wheel rails



Provides 3" offset  
gooseneck hitch

Pkg#	Ball Size	GTW	Finish	Description
16085	2 5/16"	25,000 lbs.	Carbide	Spyder gooseneck hitch
16055	2 5/16"	25,000 lbs.	Carbide	Bent plate gooseneck hitch with 3" offset
16902	--	--	Yellow zinc	Replacement rail pins & clips

## UNIVERSAL 5TH WHEEL BASE RAILS

- Can be used with all CURT and competitive 5th wheels, rollers, bent plate goosenecks and Spyder goosenecks
- Some vehicles require semi-custom brackets, see page 234



16150



16100 gloss  
16200 carbide




16104 gloss rails  
16204 carbide rails  
16101 brackets

Bulk#	Multi-Pack#	Finish	Description	Includes
16150 <b>NEW</b>	--	Gloss black	Two 5th wheel base rails, four-bolt	Brackets and hardware
16104	--	Gloss black	Two 5th wheel base rails	--
16204	--	Carbide	Two 5th wheel base rails	--
16100	--	Gloss black	Two 5th wheel base rails	Brackets and hardware (16101)
16200	--	Carbide	Two 5th wheel base rails	Brackets and hardware (16101)
16101	--	Zinc-plated	Installation brackets and hardware	--
16111	--	Zinc-plated	Installation hardware	--
16103	16103010	Zinc-plated	Replacement rail bolts, needed when reinstalling used rails	16103 - eight bolts 16103010 - 10 sets of eight bolts



16103 &  
16103010  
(10 sets)



16111



## ORIGINAL EQUIPMENT VEHICLE-TO-TRAILER EXTENSION

- Makes the electrical connections of gooseneck and 5th wheel trailers easy
- Routes existing 7-way plug at rear of vehicle into truck bed

Pkg#	Length	Fits
56080	7'	7-way RV blade socket



56080



## CUSTOM VEHICLE-TO-TRAILER WIRING HARNESS EXTENSION

- Adds an additional 7-way RV blade socket to the truck bed while retaining use of the existing 7-way RV blade socket
- Makes the electrical connections of gooseneck and 5th wheel trailers easy by plugging into the factory harness

Make / Model	Years	7' Pkg#	10' Pkg#
<b>Chevrolet / GMC</b>			
Silverado / Sierra	99 - 15	56070	56000
<b>Dodge / RAM</b>			
Dakota	95 - 10	56071	56001
RAM 1500	09 - 14	56070	56000
	95 - 08	56071	56001
RAM 2500 / 3500	10 - 14	56070	56000
	95 - 09	56071	56001
<b>Ford</b>			
F-150 / F-250 Light Duty	97 - 03	56070	56000
F-150, incl. Heritage Edition	04 - 14	56070	56000
F-250 / F-350 Super Duty	99 - 14	56070	56000
F-450 / F-550 Super Duty	99 - 14	56070	56000
<b>Nissan</b>			
Titan	04 - 14	56070	56000
<b>Toyota</b>			
Tundra	10 - 14	56070	56000




56000



56001



Route 7-way socket into truck bed



Right-angle plug for easy installation



## BRAKE CONTROLS

- All brake controls are quick plug equipped, making installation fast and easy
- See page 184 for our complete brake control line



51140



MADE  
IN USA



51130

Model Name	Pkg#	6-pack Bulk#	Spare Bracket#	Maximum Axles	Activation Method	Display	Mount Angles	Level Adjust	Warranty
TriFlex	51140	51142	51144	1 - 4	Inertia tri-axis accelerometer	Digital	-20° to +70°*	Auto	Limited lifetime
Reflex	51130	51132	--	1 - 4	Inertia dual-axis accelerometer	Digital	-20° to +70°*	Auto	Limited lifetime
Discovery	51120	51122	51124	1 - 4	Time-based	Digital	Any	Auto	Limited lifetime
Venturer	51110	--	51114	1 - 3	Time-based	LED	Any	Auto	Limited lifetime

\* TriFlex and Reflex can be mounted up to 20° off the center line of the vehicle and / or up to 20° off horizontal laterally