



Bring It[®]



SPECIALIZED TOWING

Scan for live digital version



For some specialized towing applications, additional care and quality are required to Bring It[®]! If your customers are looking for a towing solution that can handle the increased weight of heavy-duty towing, CURT has you covered.

CURT's expanding weight distribution hitch line continues to improve. We offer both trunnion bar and round bar weight distribution hitches as well as higher capacity options to give your customers the support they need for towing RVs, boats and other large trailers.

For the heaviest of towing applications, we have adjustable pintle mounts, forged lunette eyes and combination pintle hooks with trailer balls. These hitches are popular in the farming industry and other similar industries.

CURT's specialized towing line also contains a number of accessories and replacement parts including couplers, jacks, hand winches, safety chains and more. Everything in this line is designed to accommodate the unique lifestyle of each towing customer.

New to the CURT specialized towing line!



Round bar weight distribution and kits



Winches and replacement straps



Pintles, mounts and receiver pintles




WEIGHT DISTRIBUTION HITCH INFORMATION


A weight distribution (WD) hitch improves vehicle and trailer control by leveling the trailer and more evenly distributing the tongue weight. Add two sway control units to maximize control and stability.

CURT weight distribution hitches feature:


- Heavy-duty, cast head
- 2" x 2" adjustable shank
- Forged steel spring bars
- Durable powder coat finish



Without weight distribution



With weight distribution

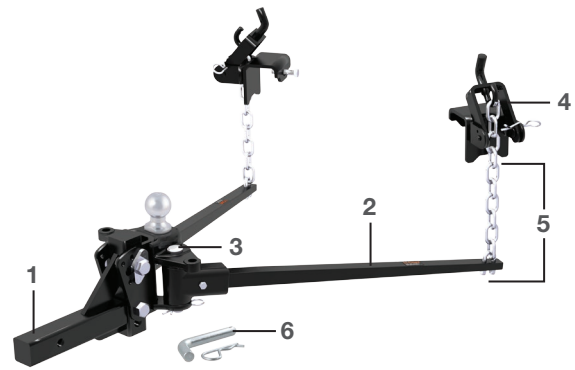

CURT Weight Distribution Hitches Include


1	2" x 2" adjustable shank	4	Hook-up brackets
2	Spring bars	5	Spring bar chain and U-bolt
3	Adjustable head	6	Pin & clip

2

INCH

TRU TRACK™ TRUNNION BAR WEIGHT DISTRIBUTION SYSTEM

- Up to 10,000 lbs. GTW / 1,000 lbs. TW
Never exceed vehicle's maximum gross weight rating
- Levels the trailer, providing a smoother ride and less stress on the tow vehicle
- Complete with active sway control system to reduce lateral movements of the trailer
- Heavy-duty, cast head with hardened cams for long operating life
- Two neutral bar settings for narrow and wide A-frame trailers
- Tilt adjustment feature simplifies setup and installation
- Pre-torqued 2 5/16" chrome-plated trailer ball and 2" x 2" adjustable shank included
- Forged, solid steel spring bars
- Heavy-duty, adjustable spring bar support brackets
- Durable carbide powder coat finish and industrial chrome-plated cam components
- Ten-year limited warranty

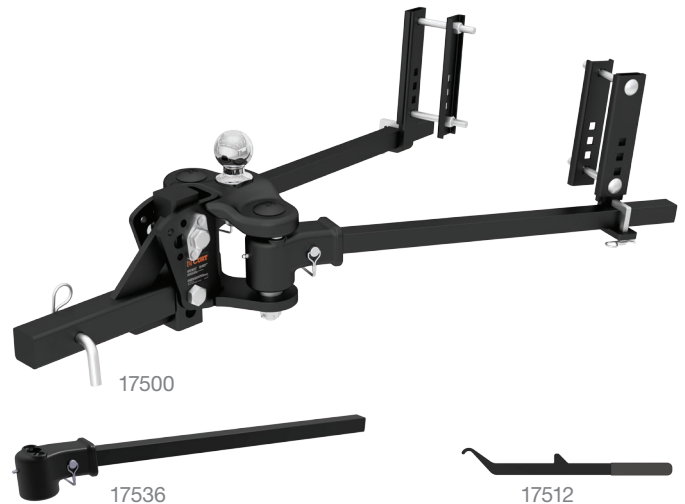

Integrated 'active' sway control arms



Tilt adjustment for easy setup & install



2 5/16" chrome trailer ball included



17507



17508



17550

Bulk#	Pkg#	GTW	TW	Description
TruTrack™ Weight Distribution Hitch				
--	17500	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Trunnion bar weight distribution hitch with active sway control
TruTrack™ Replacement Parts				
17536	--	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Replacement spring bar
17507	--	10,000 lbs.	1,000 lbs.	Replacement head
17508	--	--	--	Replacement brackets (two brackets)
17512 NEW	--	--	--	Replacement lift handle
17550	--	--	--	Replacement bolt kit

2

INCH

PIN-STYLE TRUNNION BAR WD HITCHES AND KITS

- Up to 10,000 lbs. GTW / 1,000 lbs. TW
Never exceed vehicle's maximum gross weight rating
- Levels the trailer, providing a smoother ride and less stress on the tow vehicle
- Built-in sway control attachment tabs
- Heavy-duty, cast head
- Tilt adjustment feature simplifies setup and installation (17340, 17341, 17342, 17323)
- Pin-style attachment spring bars improves strength and durability
- Hook-up brackets and 2" x 2" adjustable shank included
- Durable carbide powder coat finish



Pin-style spring bars improve strength



Tilt adjustment for easy setup & install



17340



17423

Bulk#	Pkg#	GTW	TW	Description
Pin-Style Weight Distribution Hitches				
--	17340*	5,000 - 6,000 lbs.	500 - 600 lbs.	Weight distribution hitch only
--	17341*	6,000 - 8,000 lbs.	600 - 800 lbs.	Weight distribution hitch only
--	17342*	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Weight distribution hitch only
--	17347 NEW	10,000 - 15,000 lbs.	1,000 - 1,500 lbs.	Weight distribution hitch only
Pin-Style Complete Kits				
--	17323*	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Includes WD hitch (17342), sway bar (17200), pre-torqued 2 5/16" trailer ball (40006) and chains pre-assembled to spring bars
--	17423 NEW	10,000 - 15,000 lbs.	1,000 - 1,500 lbs.	Includes WD hitch (17347), sway bar (17200), pre-torqued 2 5/16" trailer ball (40030) and chains pre-assembled to spring bars
Pin-Style Replacement Parts				
17425	--	5,000 - 6,000 lbs.	500 - 600 lbs.	Replacement spring bar with pre-assembled chain
17426	--	6,000 - 8,000 lbs.	600 - 800 lbs.	Replacement spring bar with pre-assembled chain
17427	--	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Replacement spring bar with pre-assembled chain
17428 NEW	--	10,000 - 15,000 lbs.	1,000 - 1,500 lbs.	Replacement spring bar with pre-assembled chain
17407	--	10,000 lbs.	1,000 lbs.	Replacement pin-style head
17408 NEW	--	15,000 lbs	1,500 lbs.	Replacement pin-style head
17008	--	--	--	Replacement hook-up bracket
17112	--	--	--	Replacement lift handle
17450	--	--	--	Replacement pin-style bolt kit

* Includes head tilt adjustment feature



17425



17407




17408



17008



17112



17450

2

INCH


TRUNNION BAR WD HITCHES AND KITS

- Up to 15,000 lbs. GTW / 1,500 lbs. TW
Never exceed vehicle's maximum gross weight rating
- Levels the trailer, providing a smoother ride and less stress on the tow vehicle

- Built-in sway control attachment tabs
- Hook-up brackets and 2" x 2" adjustable shank included
- Durable carbide powder coat finish



Bulk#	Pkg#	GTW	TW	Bars	Description
Trunnion Bar Weight Distribution Hitches					
--	17300	5,000 - 6,000 lbs.	500 - 600 lbs.	30 5/8"	Weight distribution hitch only
--	17301	6,000 - 8,000 lbs.	600 - 800 lbs.	30 5/8"	Weight distribution hitch only
--	17302	8,000 - 10,000 lbs.	800 - 1,000 lbs.	30 5/8"	Weight distribution hitch only
--	17330	5,000 - 6,000 lbs.	500 - 600 lbs.	28 3/8"	Weight distribution hitch only
--	17331	6,000 - 8,000 lbs.	600 - 800 lbs.	28 3/8"	Weight distribution hitch only
--	17332	8,000 - 10,000 lbs.	800 - 1,000 lbs.	28 3/8"	Weight distribution hitch only
--	17333	10,000 - 15,000 lbs.	1,000 - 1,500 lbs.	28 3/8"	Weight distribution hitch only
Trunnion Bar Complete Kits					
--	17322	8,000 - 10,000 lbs.	800 - 1,000 lbs.	28 3/8"	Includes WD hitch (17332), sway bar (17200), pre-torqued 2 5/16" trailer ball (40006) and chains pre-assembled to spring bars
--	17422	10,000 - 15,000 lbs.	1,000 - 1,500 lbs.	28 3/8"	Includes WD hitch (17333), sway bar (17200), pre-torqued 2 5/16" trailer ball (40030) and chains pre-assembled to spring bars
Trunnion Bar Replacement Parts					
17309	--	5,000 - 6,000 lbs.	500 - 600 lbs.	30 5/8"	Replacement spring bar with pre-assembled chain
17308	--	6,000 - 8,000 lbs.	600 - 800 lbs.	30 5/8"	Replacement spring bar with pre-assembled chain
17303	--	8,000 - 10,000 lbs.	800 - 1,000 lbs.	30 5/8"	Replacement spring bar with pre-assembled chain
17310	--	10,000 - 15,000 lbs.	1,000 - 1,500 lbs.	30 5/8"	Replacement spring bar with pre-assembled chain
17334	--	5,000 - 6,000 lbs.	500 - 600 lbs.	28 3/8"	Replacement spring bar with pre-assembled chain
17335	--	6,000 - 8,000 lbs.	600 - 800 lbs.	28 3/8"	Replacement spring bar with pre-assembled chain
17336	--	8,000 - 10,000 lbs.	800 - 1,000 lbs.	28 3/8"	Replacement spring bar with pre-assembled chain
17337	--	10,000 - 15,000 lbs.	1,000 - 1,500 lbs.	28 3/8"	Replacement spring bar with pre-assembled chain
17307	--	15,000 lbs.	1,500 lbs.	--	Replacement head
17008	--	--	--	--	Replacement hook-up bracket
17112	--	--	--	--	Replacement lift handle
17312	--	--	--	--	Head angle adjustment rod kit
17314	--	--	--	--	Conical washers, set of four
17350	--	--	--	--	Replacement bolt kit



2

INCH

ORIGINAL ROUND BAR WD HITCHES AND KITS

- Up to 14,000 lbs. GTW / 1,400 lbs. TW
Never exceed vehicle's maximum gross weight rating
- Levels the trailer, providing a smoother ride and less stress on the tow vehicle
- Built-in sway control attachment tabs
- Hook-up brackets and 2" x 2" adjustable shank included
- Durable carbide powder coat finish



17000



17222

Bulk#	Pkg#	GTW	TW	Description
Round Bar Weight Distribution Hitches				
--	17000	5,000 - 6,000 lbs.	500 - 600 lbs.	Round bar weight distribution hitch
--	17001	6,000 - 8,000 lbs.	600 - 800 lbs.	Round bar weight distribution hitch
--	17002	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Round bar weight distribution hitch
--	17007	10,000 - 14,000 lbs.	1,000 - 1,400 lbs.	Round bar weight distribution hitch
Round Bar Complete Kits				
--	17022	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Includes WD hitch (17002), sway bar (17200), pre-torqued 2 5/16" trailer ball (40006) and chains pre-assembled to spring bars
--	17222	10,000 - 14,000 lbs.	1,000 - 1,400 lbs.	Includes WD hitch (17007), sway bar (17200), pre-torqued 2 5/16" trailer ball (40030) and chains pre-assembled to spring bars
Round Bar Replacement Parts				
17101	--	5,000 - 6,000 lbs.	500 - 600 lbs.	Replacement spring bar with pre-assembled chain
17113	--	6,000 - 8,000 lbs.	600 - 800 lbs.	Replacement spring bar with pre-assembled chain
17115	--	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Replacement spring bar with pre-assembled chain
17117	--	10,000 - 14,000 lbs.	1,000 - 1,400 lbs.	Replacement spring bar with pre-assembled chain
17107	--	14,000 lbs.	1,400 lbs.	Replacement head
17008	--	--	--	Replacement hook-up bracket
17112	--	--	--	Replacement lift handle
17109	--	--	--	Retainer package, includes two clips, two pins, two screws
17114	--	--	--	Head adjustment spacer kit
17312	--	--	--	Head angle adjustment rod kit
17314	--	--	--	Conical washers, set of four
17150	--	--	--	Replacement bolt kit



17101



17107



17112



17109



17114



17150

2

INCH


MV ROUND BAR WD HITCHES AND KITS

NEW

- Up to 14,000 lbs. GTW / 1,400 lbs. TW
Never exceed vehicle's maximum gross weight rating
- Levels the trailer, providing a smoother ride and less stress on the tow vehicle
- Heavy-duty, fabricated head with grease zerk fittings
- Built-in sway control attachment tabs
- Hook-up brackets and 2" x 2" adjustable shank included
- Durable carbide powder coat finish



Bulk#	Pkg#	GTW	TW	Description
Round Bar Weight Distribution Hitches				
--	17050 NEW	5,000 - 6,000 lbs.	500 - 600 lbs.	Round bar weight distribution hitch
--	17051 NEW	6,000 - 8,000 lbs.	600 - 800 lbs.	Round bar weight distribution hitch
--	17052 NEW	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Round bar weight distribution hitch
--	17057 NEW	10,000 - 14,000 lbs.	1,000 - 1,400 lbs.	Round bar weight distribution hitch
Round Bar Complete Kits				
--	17062 NEW	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Includes WD hitch (17002), sway bar (17200), pre-torqued 2 5/16" trailer ball (40006) and chains pre-assembled to spring bars
--	17063 NEW	10,000 - 14,000 lbs.	1,000 - 1,400 lbs.	Includes WD hitch (17007), sway bar (17200), pre-torqued 2 5/16" trailer ball (40030) and chains pre-assembled to spring bars
Round Bar Replacement Parts				
17071 NEW	--	5,000 - 6,000 lbs.	500 - 600 lbs.	Replacement spring bar with pre-assembled chain
17072 NEW	--	6,000 - 8,000 lbs.	600 - 800 lbs.	Replacement spring bar with pre-assembled chain
17073 NEW	--	8,000 - 10,000 lbs.	800 - 1,000 lbs.	Replacement spring bar with pre-assembled chain
17074 NEW	--	10,000 - 14,000 lbs.	1,000 - 1,400 lbs.	Replacement spring bar with pre-assembled chain
17075 NEW	--	14,000 lbs.	1,400 lbs.	Replacement head
17008	--	--	--	Replacement hook-up bracket
17112	--	--	--	Replacement lift handle
17076 NEW	--	--	--	Replacement bolt kit




2

INCH

TRUNNION BAR LIGHT DUTY WD HITCH

- Up to 5,000 lbs. GTW / 300 lbs. TW
Never exceed vehicle's maximum gross weight rating
- Levels the trailer, providing a smoother ride and less stress on the tow vehicle
- Specially designed for use with lightweight trailers and pop-up campers
- Dual sway control head
- Hook-up brackets and 2" x 2" adjustable shank included
- Durable carbide powder coat finish

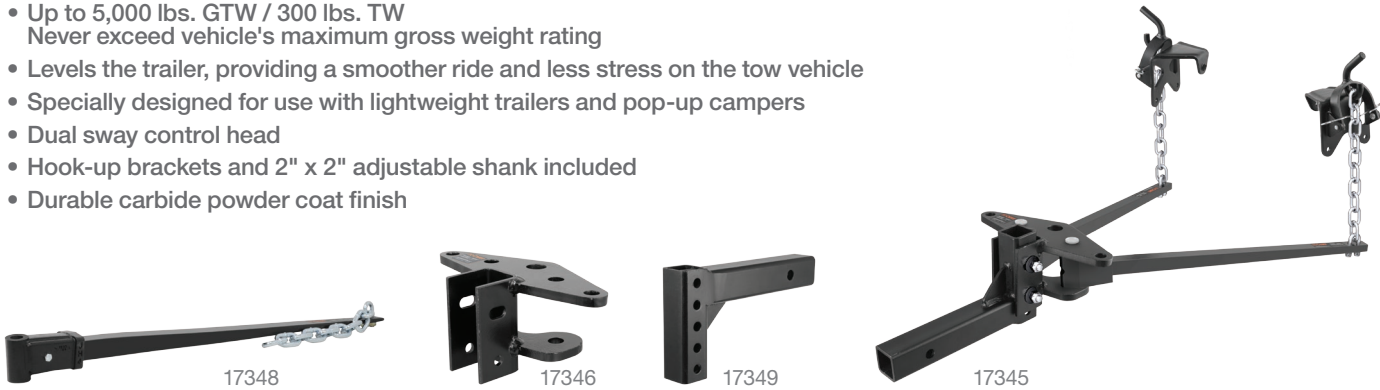

Bulk#	Pkg#	GTW	TW	Description
Light Duty Weight Distribution Hitch				
--	17345	3,000 - 5,000 lbs.	300 - 500 lbs.	Trunnion bar weight distribution hitch
Light Duty Replacement Parts				
17348	--	3,000 - 5,000 lbs.	300 - 500 lbs.	Replacement spring bar with pre-assembled chain
17346	--	5,000 lbs.	500 lbs.	Replacement head
17349	--	--	--	Replacement shank
17008	--	--	--	Replacement hook-up bracket

WD HOOK-UP HANGERS & CHAINS WITH U-BOLTS

- Replaces factory brackets
- Hardware included
- Durable carbide powder coat finish



Bulk#	Pkg#	Description
--	17003	Clamp-on chain hangers
--	17005	Bolt-on chain hangers
17008	--	Replacement hook-up bracket (single)
17111	--	Chain kit. Includes four 3/8"-16 lock nuts, four 3/8" flat washers, two chains and two U-bolts
17208	--	Replacement hook-up brackets (pair)

* For use on trailers with LP tanks or other obstructions



SWAY CONTROL & REPLACEMENT PARTS


Sway control units reduce lateral movement, commonly caused by the wind, while pulling a trailer or camper. The diagrams below illustrate the effectiveness of using sway control units. Two sway control units should be used for maximum control and stability.



Round bar weight distribution system with sway control



Bulk#	Pkg#	Description
Sway Control Kit		
--	17200	Kit includes: <ul style="list-style-type: none"> - Sway control unit - Trailer-mounted attachment ball and bolts (17201) - Hitch-mounted attachment ball (40093) - Weld-on tab (45822) - Mount reinforcement plate - Attachment clips
Sway Control Replacement Parts		
17201	--	Trailer-mounted attachment ball with four self-tapping bolts
17211	--	Replacement hardware, includes eight screws and two clips
40093	--	Sway control attachment ball
45822	--	Weld-on sway tab

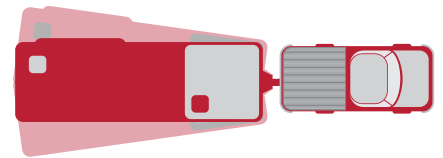

Without sway control



With sway control



BALL MOUNTS

2

INCH

SWAY TAB BALL MOUNT

- For trailer hitches with a 2" x 2" receiver tube opening
- Provides mounting tab for sway control trailer ball
- Trailer ball sold separately
- Durable powder coat finish



45820



45820 shown with 40093 ball

Bulk#	Drop	Rise	Length	GTW / TW	Hole Size
45820	2"	3/4"	7 1/2"	7,500 / 750 lbs.	1"

2
INCH

&

2½
INCH

WD REPLACEMENT SHANKS

- For trailer hitches with 2" x 2" or 2 1/2" x 2 1/2" receiver tube openings
- Limited to spring bar capacity
- Holes are spaced 1 1/4" from center to center
- Holes have a 3/4" diameter



17100



17128



17102



17103



17120



17121



17122



17123




17124



17125

Measuring a weight distribution shank

See table for corresponding measurements

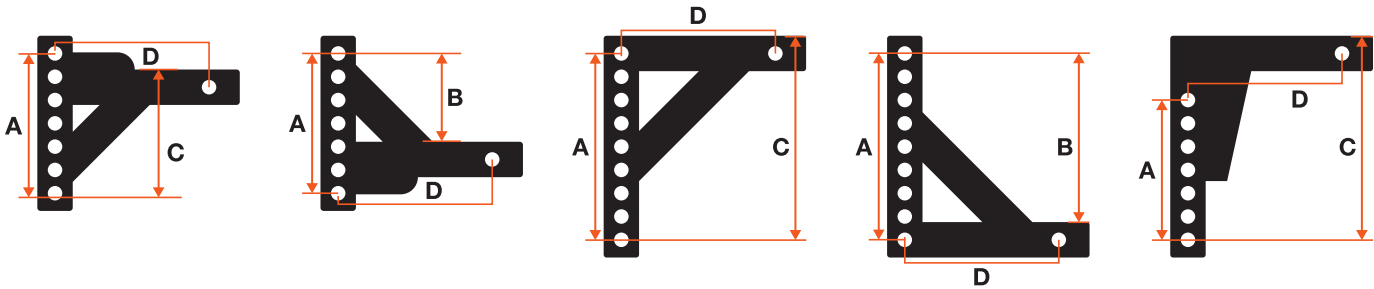

Bulk#	Height (A)	Rise (B)	Drop (C)	Length (D)
For 2" x 2" Receiver Tube Openings				
17100	7 1/2"	5 1/2"	7 1/2"	8"
17102	7 1/2"	5 1/2"	7 1/2"	12"
17103	7 1/2"	5 1/2"	7 1/2"	14"
17120	8 3/4"	7 3/4"	9 3/4"	10"
17121	10"	9"	11"	12"
17122	10"	9"	11"	14"
17123	11 1/4"	10 1/4"	12 1/4"	7"
17124	6 1/4"	--	13 1/2"	9"
17125	6 1/4"	--	19 3/4"	8"
For 2 1/2" x 2 1/2" Receiver Tube Openings				
17128 NEW	7 1/2"	4 3/4"	7 3/4"	8"

2

INCH

&

2 1/2

INCH

ADJUSTABLE PINTLE MOUNTS

- For trailer hitches with 2" x 2" or 2 1/2" x 2 1/2" receiver tube openings
- Protective, cardboard sleeve and full-color retail label
- Durable carbide powder coat finish
- Black oxide finish for bolt kits



48330



48331



Pintle hook attached



48326



48327



48340



48323



48328



48324



48325



48343



48329



48339

48325
packaged


48341



48342

Measuring a pintle mount

See table for corresponding measurements

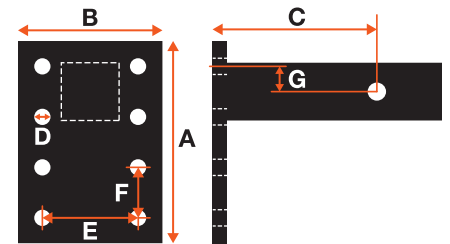

Bulk#	GTW	Pintle Positions	Plate Height (A)	Plate Width (B)	Shank Length (C)	Hole Size (D)	Hole Space (E)	Hole Space (F)	Top Hole Height (G)
For 2" x 2" Receiver Tube Openings									
48326	20,000 lbs.	1-position	3 1/2"	5"	8 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48327	20,000 lbs.	1-position	3 1/2"	5"	10 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48323	10,000 lbs.	3-position	7"	5"	8 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48324	10,000 lbs.	3-position	7"	5"	10 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48328	15,000 lbs.	3-position	7"	5"	8 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48325	15,000 lbs.	3-position	7"	5"	10 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48343 NEW	17,000 lbs.	3-position	7 1/4"	6 1/2"	6"	9/16"	3 5/16"	1 3/4"	7/8"
48341	10,000 lbs.	6-position	13"	5"	12 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48342	10,000 lbs.	6-position	13"	5"	14 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
For 2 1/2" x 2 1/2" Receiver Tube Openings									
48340	20,000 lbs.	1-position	3 1/2"	5"	12 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48329	18,000 lbs.	3-position	7"	5"	12 1/2"	9/16"	3 5/16"	1 3/4"	7/8"
48339 NEW	20,000 lbs.	3-position	7 1/4"	6 1/2"	6 1/4"	9/16"	3 5/16"	1 3/4"	1 1/4"
Bolt Kits									
48330	- Four 12mm x 50mm hex bolts (class 10.9) - Four 12mm hex nuts (class 8) - Four 12mm lock washers								
48331	- Four 12mm x 50mm socket head cap screws (class 12.9) - Four 12mm nylock hex nuts (class 8) - Four 12mm lock washers								

FORGED PINTLE HOOKS

- Safety pin and bolt kit included
- Attractive, full-color retail packaging



48205



48210



48215




48230

Bulk#	Pkg#	GTW	Vertical Load	Fits Lunette Eye	Finish
Pintle Hooks					
--	48205	10,000 lbs.	2,000 lbs.	2 1/2" or 3" inside	Black
--	48210	20,000 lbs.	4,000 lbs.	2 1/2" or 3" inside	Black
--	48215	30,000 lbs.	8,000 lbs.	2 1/2" or 3" inside	Black
--	48230	60,000 lbs.	12,000 lbs.	2 1/2" or 3" inside	Black
Bolt Kits					
48330	- Four 12mm x 50mm hex bolts (class 10.9) - Four 12mm hex nuts (class 8) - Four 12mm lock washers				Black oxide
48331*	- Four 12mm x 50mm socket head cap screws (class 12.9) - Four 12mm nylock hex nuts (class 8) - Four 12mm lock washers				Black oxide

* Required for 48230 to reach 60,000 lbs. gross trailer weight



48330



48331 - for part# 48230



Utilizing pintle hook

FORGED BALL & PINTLE COMBINATION

- Changeable ball with a hard chrome surface
- Safety pin and bolt kit included
- Attractive, full-color retail packaging



48180



48190



48200



48330

Bulk#	Pkg#	Pintle GTW	Ball GTW	Ball Diameter	Fits Lunette Eye	Finish
Pintle Hooks						
--	48180	16,000 lbs.	6,000 lbs.	1 7/8"	2 1/2" or 3" inside	Black
--	48190	16,000 lbs.	10,000 lbs.	2"	2 1/2" or 3" inside	Black
--	48200	16,000 lbs.	16,000 lbs.	2 5/16"	2 1/2" or 3" inside	Black
Bolt Kit						
48330	- Four 12mm x 50mm hex bolts (class 10.9) - Four 12mm hex nuts (class 8) - Four 12mm lock washers					Black oxide



Utilizing pintle hook

Utilizing trailer ball

2
INCH

&


2 1/2
INCH

FORGED RECEIVER MOUNT PINTLE HOOKS

- For trailer hitches with 2" x 2" or 2 1/2" x 2 1/2" receiver tube openings
- Safety pin included



48005



48004



48010

Bulk#	GTW	Overall Length	Hook Length	Fits Lunette Eye	Finish
For 2" x 2" Receiver Tube Openings					
48005	10,000 lbs.	14 1/2"	9 1/2"	2 1/2" inside	Black
48004	20,000 lbs.	14 1/2"	9 1/2"	2 1/2" inside	Black
For 2 1/2" x 2 1/2" Receiver Tube Openings					
48010 NEW	20,000 lbs.	14 3/4"	9 1/2"	2 1/2" inside	Black

2
INCH

&

2 1/2
INCH

FORGED RECEIVER MOUNT BALL & PINTLE COMBINATIONS

- For trailer hitches with 2" x 2" or 2 1/2" x 2 1/2" receiver tube openings
- Changeable ball with a hard chrome surface
- Safety pin included



48006



48007



48012

Bulk#	GTW	Ball Capacity	Ball Size	Overall Length	Ball Length	Hook Length	Fits Lunette Eye	Finish
For 2" x 2" Receiver Tube Openings								
48006	16,000 lbs.	12,000 lbs.	2 5/16"	15 1/4"	11 1/4"	9 1/2"	2 1/2" or 3" inside	Black
48007	16,000 lbs.	10,000 lbs.	2"	15 1/4"	11 1/4"	9 1/2"	2 1/2" or 3" inside	Black
For 2 1/2" x 2 1/2" Receiver Tube Openings								
48012 NEW	20,000 lbs.	20,000 lbs.	2 5/16"	15"	11"	9 1/2"	2 1/2" or 3" inside	Black



PINTLE REPLACEMENT BALLS

- Drop-forged with a hard chrome-plated finish
- Fine threads and a self-securing nylon-insert lock nut

Bulk#	Ball Diameter	Shank Diameter	Capacity
48810	1 7/8"	1 1/4"	6,000 lbs.
48820	2"	1 1/4"	10,000 lbs.
48830	2 5/16"	1 1/4"	16,000 lbs.



48810



48820



48830

2

INCH

ADJUSTABLE CHANNEL MOUNTS

- Built-in anti-rattle
- Durable carbide powder coat finish
- Patent# US8,033,563



45900



45901



45919



45920



45910



45911



45916



45915



23556

Bulk#	Pkg#	Max Drop	Max Rise	Length	GTW / TW	Ball Diam.	Hole Size
Channel Mounts and Locks							
--	45900	6"	5 1/4"	11" and 12"	14,000 / 1,400 lbs.	2", 2 5/16"	--
--	45901	6 3/4"	5 1/4"	11" and 12"	6,000 / 600 lbs.	--	1"
--	45919	--	--	--	10,000 lbs.	2"	1 1/4"
--	45920	--	--	--	13,000 lbs.	2 5/16"	1 1/4"
--	23556	--	--	--	Channel mount lock set		
Channel Mount Replacement Parts							
--	45915	--	--	--	Channel mount replacement pins		
--	45916 NEW	--	--	--	Channel mount anti-rattle replacement kit		
45910	--	--	--	11" and 12"	Replacement shank for the 45900		
45911	--	--	--	11" and 12"	Replacement shank for the 45901		
* See page 249 for pintle replacement balls							

* See page 249 for pintle replacement balls



Locks secure mount



Built-in anti-rattle

FORGED LUNETTE EYES

- Single stud eliminates need for a swivel-type pintle hook (48520, 48530)
- Flat design allows lunette eye drawbar to bolt quickly and easily to a trailer tongue (48510)



48520



48530



48510



Utilizing pintle hook



Utilizing clevis bar

Bulk#	GTW	Eye Hole Size	Bar Width	Bar Length	Bar Thickness	Finish	Description
48510	22,000 lbs.	3" inside	3"	13"	1 5/8"	Black	Lunette eye drawbar, seven-bolt
48520	15,000 lbs.	2 1/2" inside	--	--	--	Black	Lunette eye with nuts
48530	45,000 lbs.	3" inside	--	--	--	Black	Lunette eye with nuts

CHANNELS & FORGED LUNETTE EYES

- Commonly used on trailers up to 24,000 lbs. GTW
- Various adjustment heights for leveling the trailer
- Attractive, full-color retail packaging



Bulk#	Pkg#	GTW	Number of Positions	Eyehole Size	Bolt Hole Spacing	Channel Width	Channel Height	Description
48600	--	12,000 lbs.	--	3" inside	--	--	--	Forged lunette eye
48601	--	12,000 lbs.	--	3" inside	--	--	--	Forged lunette eye, black
48660	--	24,000 lbs.	--	3" inside	--	--	--	Forged lunette eye
48631 NEW	48630	12,000 lbs.	3-position	3" inside	2" on center	3 1/2"	7 1/2"	Forged lunette eye with channel
48610	--	--	3-position	--	2" on center	3 1/2"	7 1/2"	Formed channel
48650	--	--	5-position	--	2" on center	3 1/2"	11 3/4"	Formed channel
48640	--	12,000 lbs.	5-position	3" inside	2" on center	3 1/2"	11 3/4"	Forged lunette eye with channel
48620	--	--	--	--	--	--	--	Bolt kit includes, grade 8: - Two hex bolts (5/8" x 5 1/2") - Two hex bolts (1/2" x 1 1/2") - Two nylock hex nut (5/8") - Two flat washers (1/2") - Four flat washers (5/8")

FORGED MOUNT-STYLE LUNETTE EYES

- Smooth back plate for flush mounting
- Four-bolt mounting pattern
- Attractive, full-color retail packaging



Bulk#	Pkg#	GTW	Eye Hole Size	Bolt Hole Spacing	Base Size	Finish
Lunette Eyes						
--	48550	35,000 lbs.	2 1/2" inside	4 1/2" center to center	6" square	Black
--	48560	60,000 lbs.	3" inside	4 1/2" center to center	6" square	Black
Bolt Kits						
48330	- Four class 10.9 hex bolts (12mm x 50mm) - Four class 8 hex nuts (12mm) - Four lock washers (12mm)					Black oxide
48331*	- Four class 12.9 socket head cap screws (12mm x 50mm) - Four class 8 nylock hex nuts (12mm) - Four lock washers (12mm)					Black oxide

* Required for 48560 to reach 60,000 lbs. gross trailer weight



STRAIGHT-TONGUE COUPLERS

- Lockable posi-lock latch with a durable zinc-plated finish
- Three-year limited warranty



25105



25128



25131



25094



25194



25153



25135



25138



25100

Bulk#	Pkg#	Class	GTW / TW	Ball Diameter	Channel Width
Posi-Lock Couplers					
25105	--	1	2,000 / 200 lbs.	1 7/8"	2 1/2"
25128	--	1	2,000 / 200 lbs.	1 7/8"	2"
25131	--	1	2,000 / 200 lbs.	1 7/8"	3"
25153	--	2	3,500 / 500 lbs.	2"	2"
25135	--	2	3,500 / 500 lbs.	2"	2 1/2"
25138	--	2	3,500 / 500 lbs.	2"	3"
25100	--	3	5,000 / 700 lbs.	2"	3"
Posi-Lock Coupler Replacement Parts					
--	25094	1	2,000 / 200 lbs.	1 7/8"	--
--	25194	2	3,500 / 500 lbs.	2"	--

A-FRAME COUPLERS

- Lockable latch
- Three year limited warranty



25101



25210



25200



25217

Bulk#	Class	GTW / TW	Ball Diameter	Latch Style	Finish
A-Frame Couplers					
25101	3	5,000 / 700 lbs.	2"	Posi-lock	Zinc-plated
25210	3	5,000 / 700 lbs.	2"	Posi-lock	Gloss black
25217*	4	7,000 / 1,050 lbs.	2"	Sleeve-lock	Gloss black
25200	4	10,000 / 1,500 lbs.	2 5/16"	Easy-lock	Gloss black
25227*	4	12,500 / 1,875 lbs.	2 5/16"	Sleeve-lock	Gloss black
Replacement Part for 25101 and 25210 A-Frame Couplers					
25294	3	5,000 / 700 lbs.	2"	Posi-lock	Zinc-plated

* Solid neck for increased strength and greater corrosion resistance



25227



25294

CHANNEL-MOUNT COUPLERS

- Use with channel part numbers 48610 and 48650, see page 251
- Lockable couplers with a gloss black finish
- **Three-year limited warranty**



25319



25329



25328



25330



25388

Bulk#	GTW / TW	Ball Diameter	Description
25319*	7,000 / 1,050 lbs.	2"	Sleeve-lock coupler
25329*	12,500 / 1,875 lbs.	2 5/16"	Sleeve-lock coupler
25330 NEW	14,000 / 2,100 lbs.	2 5/16"	Easy-lock
25328	15,000 / 2,250 lbs.	2 5/16"	Easy-lock
25388	--	--	Bolt kit includes: - Two 5/8" x 4 3/4" hex bolts (grade 8) - Two 5/8" nylock hex nuts (grade 5) - Four 5/8" flat washers (grade 5)

* Solid neck for increased strength and greater corrosion resistance



COUPLER LOCKS

- Designed for latch-type couplers
- Includes two keys
- Attractive, full-color retail packaging

Pkg#	Fits Coupler Span	Pin Diameter	Finish	Description
23546	3/4"	1/4"	Solid brass	Coupler lock
23022	3/4"	1/4"	Brass-plated	Coupler lock
23521 NEW	3/4"	1/4"	Black	Coupler lock
23520 NEW	7/8"	1/4"	Chrome-plated	Coupler lock, barbell
23523 NEW	3 3/8"	1/4"	Chrome-plated	Coupler lock, barbell
23522 NEW	2 1/2"	1/4"	Chrome-plated	Coupler lock, barbell
23503 NEW	Adjustable	1/4"	Chrome-plated with anodized aluminum	Coupler lock, barbell, right angle



23546



23022



23521



23520



23523



23522



23503



TRAILER LOCKS

- Designed to deter trailer theft by preventing a trailer ball from being inserted into the coupler
- Includes two keys



23079



23081



23659



23179

Pkg#	Fits	Finish	Description
23079	1 7/8" and 2" couplers	Grey powder coat	Aluminum lock for flat lip couplers
23081	2" and 2 5/16" couplers	Grey powder coat	Aluminum lock for flat lip couplers
23659	Adjustable	Hammer-tone epoxy	Die cast trailer lock with dual-ratchet locking system
23179	Adjustable	Ballistic grade nylon	Solid hardened steel trailer lock with dual-ratchet locking system

A-FRAME JACKS

- Designed for A-frame trailers
- Can be bolted or welded on
- See page 256 for repair parts



28200



28202



28203



28204



28250



28255

Bulk#	Pkg#	Capacity	Wind	Travel	Bracket Height	Handle Color
28200	--	2,000 lbs.	Top	14"	8"	Black
28202	28203	2,000 lbs.	Top	15"	9"	Black
28204	--	2,000 lbs.	Side	14 1/2"	9"	Black
28250	--	5,000 lbs.	Top	14"	10 1/2"	Black
28255	--	5,000 lbs.	Top	15"	10 1/2"	Red claw

MARINE JACKS

- Bolt-on hardware included
- Heavy-duty pull-pin
- See page 256 for repair parts



28100



28101



28112



28113



28115



28116



28114



28118



28155



28156



28121

Bulk#	Pkg#	Capacity	Wind	Travel	Bracket Height	Wheel Size	Finish
28100	28101	1,000 lbs.	Side	10"	12 11/16"	6"	Zinc-plated
28112	28113	1,200 lbs.	Side	10"	12 11/16"	6"	Zinc-plated
--	28114*	1,200 lbs.	Side	10"	12 11/16"	6"	Zinc-plated, 600-hour salt spray resistant
28115	28116	1,500 lbs.	Side	10"	12 11/16"	8"	Zinc-plated
--	28118*	1,500 lbs.	Side	10"	12 11/16"	6"	Zinc-plated, 600-hour salt spray resistant
28155	28156	1,500 lbs.	Side	10"	12 1/2"	Dual 6"	Zinc-plated
--	28121*	1,200 lbs.	Side	13"	14"	Dual 5 3/4"	Zinc-plated

* Continued while supplies last

SWIVEL JACKS

- Weldable mounting pipe included
- Pull-pin swivel
- See page 256 for repair parts



Bulk#	Pkg#	Capacity	Wind	Travel	Hole Size	Handle Color	Style
28320*	--	2,000 lbs.	Top	10"	9/16"	Red claw	Pipe-mount
28350*	28351*	5,000 lbs.	Top	10"	9/16"	Red claw	Pipe-mount
28356*	--	5,000 lbs.	Top	15"	5/8"	Red claw	Pipe-mount
28322*	28323*	2,000 lbs.	Top	15"	9/16"	Red claw	Pipe-mount
28321	--	2,000 lbs.	Side	10"	9/16"	Black	Pipe-mount
28354	--	5,000 lbs.	Side	10"	5/8"	Black	Pipe-mount
28358	--	5,000 lbs.	Side	15"	5/8"	Black	Pipe-mount
28324	--	2,000 lbs.	Side	15"	9/16"	Black	Pipe-mount
28300*	28301*	2,000 lbs.	Top	10"	--	Red claw	Bracket-mount
28302	--	2,000 lbs.	Side	10"	--	Black	Bracket-mount
28304*	28305*	2,000 lbs.	Top	15"	--	Red claw	Bracket-mount
28306	--	2,000 lbs.	Side	15"	--	Black	Bracket-mount

* Use replacement handle, bulk# 28937

DIRECT WELD SQUARE JACKS

- Pull-pin included
- See page 256 for repair parts

Bulk#	Support Capacity	Lift Capacity	Wind	Travel	Description
28512	12,000 lbs.	10,000 lbs.	Side	12 1/2"	Spring return, front pin, handle and handle clip
28570	8,000 lbs.	7,000 lbs.	Top	15"	Drop leg jack
28575	8,000 lbs.	7,000 lbs.	Side	15"	Drop leg jack



JACK ACCESSORIES

- Caster assemblies (28276 and 28277) are not designed as repair parts for marine jacks; use jack repair part number 28912
- Attractive, full-color retail packaging



28270 28271



28273 28272



28275 28274



28277 28276



28278 28279

Bulk#	Pkg#	Capacity	Fits Tube	Height	Wheel Size	Diameter	Description
28270	28271	2,000 lbs.	2"	--	--	--	Jack foot, bolt-on
28272	28273	2,000 lbs.	2"	1 11/16"	--	--	Jack foot
28274	28275	2,000 lbs.	2"	8 11/2"	--	--	Jack foot
28276	28277	1,200 lbs.	2"	--	6" x 2"	--	Caster assembly with poly wheel
28278	28279	--	--	--	--	3/8"	Safety pin

JACK REPAIR PARTS



28965



28950



28913



28938



28940



28912

Bulk#	Description
Marine Jacks	
28910	Bolt-through jack mounting bracket
28911	Bolt-through jack mounting bars (2) and bolts (4)
28912	Replacement caster wheel with bolt and bushing
28913	Replacement handle for marine jacks (excluding continue-while-supplies-last jacks)
28914	Gear kit with shear pins
A-Frame Jacks	
28921	Handle for part# 28200, 28202, 28203, 28250
Swivel Jacks	
28922	Bearing for 2,000 lbs. and 5,000 lbs. top wind jacks
28923	Handle for 2,000 lbs. and 5,000 lbs. side wind jacks
28924	Gear kit with shear pins for 2,000 lbs. and 5,000 lbs. side wind jacks
28930	Female pipe weld-on for 2,000 lbs. and 5,000 lbs. pipe-mounted swivel jacks
28931	Male pipe weld-on for 2,000 lbs. and 5,000 lbs. pipe-mounted swivel jacks, 9/16" pin hole
28932	Male pipe weld-on for 2,000 lbs. and 5,000 lbs. pipe-mounted swivel jacks, 5/8" pin hole
28934	9/16" pin with 3 1/2" long chain
28935	5/8" pin with 3 1/2" long chain
28938	Mounting bracket for bracket-mounted swivel jacks
Direct Weld Square Jacks	
28950	Gear kit with shear pins for part# 28512
28951	Handle for part# 28512

Bulk#	Description
Direct Weld Square Jacks (Cont)	
28952	Cap for part# 28512
28953	Handle clip for part# 28512
28954	Bearing for part# 28512
28955	Pull-pin assembly designed for part# 28512 (3/4" pull-pin, spring, washer and cotter pin)
28956	Threaded lifting nut with grease retaining structure for part# 28512
28957	Inner pipes w/ drop leg, foot and pull-pin for part# 28512
28958	Gear kit with shear pins for part# 28575
28959	Side wind handle with pins and bushings for part# 28575
28960	Side wind handle with pins, bushings and gears for part# 28575
28961	Cap and screws for part# 28575
28962	Drop leg with foot for part# 28570 and 28575
28963	Drop leg foot pin for part# 28570 and 28575
28964	Handle kit for part# 28570
28965	Bearing for part# 28570
Miscellaneous Repair Parts	
28925	Plastic cap for 2,000 lbs. side wind jacks
28926	Black handle knob and cap nut
28927	Red handle knob and cap nut for top wind jacks
28937	Solid handle for top wind jacks
28939	2" snap ring for part# 28100, 28304, 28302, 28300
28940	1/2" pull-pin for bracket-mounted swivel jacks and marine jacks

HAND WINCHES

NEW

- High quality steel construction provides superior pinion strength and eliminates gear-to-shaft binding failures
- A broached pinion shaft securely engages the pinion gears
- Attractive, full-color retail packaging



29423



29433



29424



29435



29425



29427



29428




29438




29429


Pkg#	Capacity	Gear Ratio	Hub Diameter	Handle Length	Strap
29423 NEW	900 lbs.	3.25:1	3/4"	6 1/2"	No
29433 NEW	900 lbs.	3.25:1	3/4"	6 1/2"	Yes, 15' (29450)
29424 NEW	1,200 lbs.	4.2:1	3/4"	7 1/2"	No
29425 NEW	1,400 lbs.	4.2:1	3/4"	7 1/2"	No
29435 NEW	1,400 lbs.	4.2:1	3/4"	7 1/2"	Yes, 20' (29451)
29427 NEW	1,700 lbs.	5.1:1	1"	8"	No
29428 NEW	1,900 lbs.	5.1:1	1"	8"	No
29438 NEW	1,900 lbs.	5.1:1	1"	8"	Yes, 20' (29451)
29429 NEW	2,100 lbs.	5.1:1	1"	9 3/4"	No



23423 pinion gear



23424 pinion gear



23427 crank handle



23438 locking lever

WINCH STRAPS

- Strong nylon webbing
- Zinc-plated snap hook for easy hookup
- Attractive, full-color retail packaging



29007



29450




29451

Bulk#	Pkg#	Work Load	Break Strength	Strap Width	Strap Length
29007	--	1,333 lbs.	4,000 lbs.	2"	20'
--	29450 NEW	1,100 lbs.	3,300 lbs.	2"	15'
--	29451 NEW	1,100 lbs.	3,300 lbs.	2"	20'

1 1/4 INCH & 2 INCH & 2 1/2 INCH RECEIVER TUBING

- Accepts 1 1/4", 2" or 2 1/2" ball mounts and accessories
- 1/2" reinforcing collar
- Heat-shrink packaging with retail label

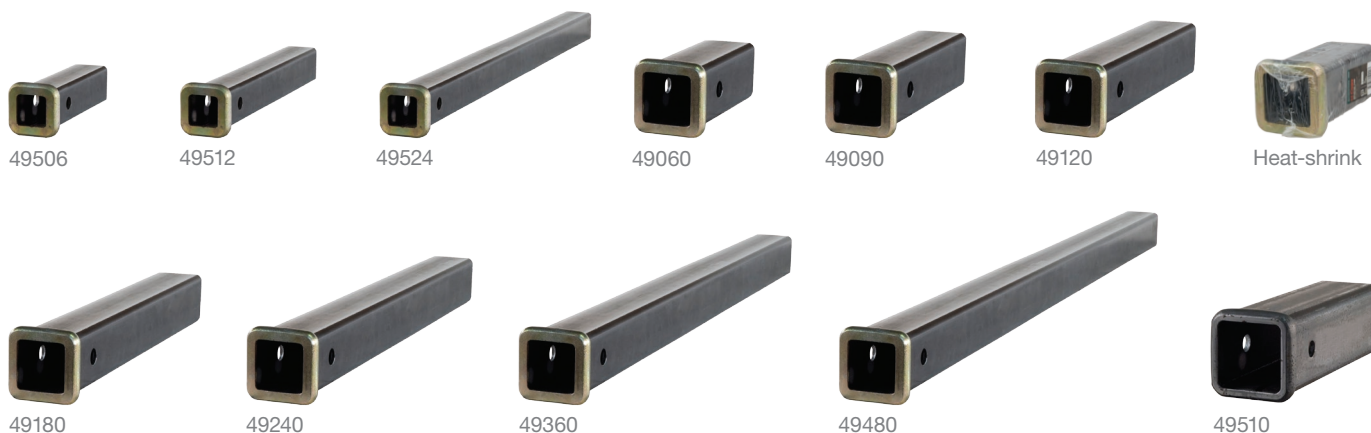

Bulk#	Finish	Receiver Tube Opening	Tube Length
49506	Raw	1 1/4" x 1 1/4"	6"
49512	Raw	1 1/4" x 1 1/4"	12"
49524	Raw	1 1/4" x 1 1/4"	24"
49060	Raw	2" x 2"	6"
49090	Raw	2" x 2"	9"
49120	Raw	2" x 2"	12"

Bulk#	Finish	Receiver Tube Opening	Tube Length
49180	Raw	2" x 2"	18"
49240	Raw	2" x 2"	24"
49360	Raw	2" x 2"	36"
49480	Raw	2" x 2"	48"
49510	Raw	2 1/2" x 2 1/2"	10"

2 INCH SOLID STEEL HITCH BARS

- Made from hot-rolled steel for maximum strength
- Rounded corners for versatility to fit all 2" x 2" receiver tube openings



Bulk#	Finish	Length	Description
49537	Raw	8"	Solid steel square bar
49529	Raw	10"	Solid steel square bar
49530	Raw	12"	Solid steel square bar
49531	Raw	14"	Solid steel square bar
49532	Raw	16"	Solid steel square bar

Bulk#	Finish	Length	Description
49533	Raw	18"	Solid steel square bar
49534	Raw	20"	Solid steel square bar
49535	Raw	22"	Solid steel square bar
49536	Raw	24"	Solid steel square bar

2 WELD-ON HITCH BOX

- Weld-on hitch box for custom fabrication



Bulk#	GTW / TW	Finish	Receiver Tube Size
49717	5,000 / 500 lbs.	Raw	2" x 2"

2 REINFORCEMENT COLLAR


- Reinforces standard 2" x 2" inside diameter tubing



Bulk#	Finish	Receiver Tube Size
49770	Raw	2" x 2"

WELD-ON POCKET ANCHOR

- Adds a tie-down point for cargo straps and binder chains
- Perfectly sized to accept a 2" x 4" stud



Bulk#	Finish	Inside Width	Inside Depth
83072	Raw	3 1/2"	1 5/8"

SAFETY CHAIN LOOP

- Provides an attachment point



Bulk#	Capacity	Finish	Description
49950	10,000 lbs.	Raw	Weld-on safety chain loop



2 UNIVERSAL WELD-ON TRAILER HITCHES

- 2" x 2" receiver tube openings
- Great for use with utility boxes



15901



15902



15903

Bulk#	GTW / TW	Drop	Maximum Width	Minimum Width
15901	15,000 / 1,500 lbs.	5"	43"	18"
15902	15,000 / 1,500 lbs.	13 1/2"	43"	18"
15903	15,000 / 1,500 lbs.	13 1/2"	60"	18"

2
INCH

RV TRAILER HITCHES

- 2" x 2" receiver tube openings
- Perfect for towing a vehicle, bike rack or cargo carrier



13701



13702



13703

Bulk#	Weight Capacity	Weight Distribution	Fits Frames	Drop	Description
13701	5,000 / 500 lbs. GTW	6,000 / 600 lbs. WD	Up to 51" in width	2"	Adjustable RV hitch with three-piece design
13702	5,000 / 500 lbs. GTW	6,000 / 600 lbs. WD	Up to 51" in width	--	Adjustable RV hitch with three-piece design
13703	3,500 / 350 lbs. GTW	--	Up to 72" in width	--	Adjustable RV hitch with three-piece design

2
INCH

RV BUMPER HITCHES

- 2" x 2" receiver tube openings
- Mounting hardware included
- Attractive, full-color retail packaging



19100



19101

Pkg#	GTW / TW	Fits
19100	3,500 / 350 lbs.	4" x 4" channel bumpers
19101	3,500 / 350 lbs.	2" x 4" channel bumpers



TOWING LIGHTS

- Non-scratch magnetic base
- Patent# D355,270



53204



53200

Bulk#	Pkg#	Length	Plug	Description
53200	53204*	20'	4-way flat	Auxiliary towing lights

* Includes a sturdy, reusable case

ADJUSTABLE TOW BAR

- Use when towing a vehicle behind an RV
- Brackets bolt to the tow vehicle's bumper
- Attractive, full-color retail packaging



19745



19747



21500

Bulk#	Pkg#	Capacity	Ball Diameter	Finish	Dimensions	Description
--	19745	5,000 lbs.	2"	Gloss black	Adjusts from 26" to 41" in width	Adjustable tow bar
19747	--	--	--	Gloss black	--	Bumper brackets
21500	21501	--	--	Zinc-plated	5/8" diameter	Replacement pin & clip



Federal law requires safety chains to be secured while towing.
Each chain or cable assembly must meet or exceed the trailer weight.



SAFETY CABLES

- Each cable must meet or exceed the trailer weight
- Secures the trailer in case of emergency
- Attractive, full-color retail packaging



Safety cables in use



80136



80151



80176

Pkg#	Break Strength	Units	Total Length	Hooks	Hook Type	Cable Finish	Hook Finish
80136	3,500 lbs.	2 cables	42"	1	Safety latch	Nylon-coated	Zinc-plated
80151	5,000 lbs.	2 cables	42"	1	Safety latch	Nylon-coated	Zinc-plated
80176	7,500 lbs.	2 cables	42"	1	Safety latch	Nylon-coated	Zinc-plated

SAFETY CHAIN WITH S-HOOKS

- Each chain must meet or exceed the trailer weight
- Secures the trailer in case of emergency
- Attractive, full-color retail packaging



Safety chains in use



80020



80011



80010



80040



80031



80030



80300



80301

Bulk#	Pkg#	Break Strength	Number of Units	Total Length	Link Diameter	Hooks Per Unit	Chain Length	Grade	Hook Size	Finish
80020	--	2,000 lbs.	1 chain	27"	3/16"	1 (81260)	23"	30	3/8"	Zinc-plated
80010	80011	2,000 lbs.	1 chain	48"	3/16"	2 (81260)	40"	30	3/8"	Zinc-plated
80040	--	5,000 lbs.	1 chain	27"	1/4"	1 (81270)	23"	30	7/16"	Zinc-plated
80030	80031	5,000 lbs.	1 chain	48"	1/4"	2 (81270)	40"	30	7/16"	Zinc-plated
80300	--	7,000 lbs.	1 chain	27"	8/0	1 (81620)	23"	30	17/32"	Zinc-plated
80301	--	7,000 lbs.	1 chain	48"	8/0	2 (81620)	40"	30	17/32"	Zinc-plated

SAFETY CHAIN WITH SNAP HOOKS

- Assembled with snap hooks
- Safety chains are required while towing
- Each chain must meet or exceed the trailer weight



19749



80312



80313

Bulk#	Pkg#	Break Strength	Number of Units	Total Length	Link Diameter	Hooks Per Unit	Chain Length	Grade	Hook Size	Finish
80312	--	2,000 lbs.	1 chain	27"	3/16"	1 (81266)	24"	30	3/8"	Zinc-plated
80313	--	5,000 lbs.	1 chain	27"	1/4"	1 (81277)	24"	30	7/16"	Zinc-plated
--	19749	5,000 lbs.	2 chains	65"	1/4"	2 (81260)	60"	30	7/16"	Zinc-plated with rubber coating

SAFETY CHAIN WITH SAFETY LATCH CLEVIS HOOKS

- Assembled with one safety latch clevis hook
- Safety chains are required while towing
- Each chain must meet or exceed the trailer weight



80302



80314



80303



80315



80304



80316

Bulk#	Break Strength	Total Length	Link Diameter	Grade	Chain Length	Chain Finish	Hook Size	Hook Size	Hook Finish
80302	7,800 lbs.	35"	1/4"	43	32"	Zinc-plated	1/4"	S-hook (81900)	Yellow zinc-plated
80314	11,700 lbs.	35"	5/16"	43	32"	Zinc-plated	5/16"	5/16" (81550)	Yellow zinc-plated
80303	12,600 lbs.	35"	1/4"	70	32"	Yellow zinc-plated	1/4"	S-hook (81940)	Yellow zinc-plated
80315	16,200 lbs.	35"	3/8"	43	31"	Zinc-plated	3/8"	S-hook (81560)	Yellow zinc-plated
80304	18,800 lbs.	35"	5/16"	70	32"	Yellow zinc-plated	5/16"	S-hook (81950)	Yellow zinc-plated
80316	24,000 lbs.	35"	3/8"	70	31"	Yellow zinc-plated	3/8"	S-hook (81960)	Yellow zinc-plated

TRANSPORT BINDER SAFETY CHAIN

- Designed for tie-down and binding applications
- Assembled with two clevis grab hooks
- Do not exceed the working load limit



80305



80307




80309

Bulk#	Break Strength	Work Load	Total Length	Link Diameter	Grade	Chain Length	Finish	Description
80305	18,800 lbs.	4,700 lbs.	14'	5/16"	70	162"	Yellow zinc	Includes two clevis grab hooks (81437)
80306	18,800 lbs.	4,700 lbs.	16'	5/16"	70	186"	Yellow zinc	Includes two clevis grab hooks (81437)
80307	18,800 lbs.	4,700 lbs.	20'	5/16"	70	234"	Yellow zinc	Includes two clevis grab hooks (81437)
80308	18,800 lbs.	4,700 lbs.	25'	5/16"	70	294"	Yellow zinc	Includes two clevis grab hooks (81437)
80309	26,400 lbs.	6,600 lbs.	14'	3/8"	70	162"	Yellow zinc	Includes two clevis grab hooks (81438)
80310	26,400 lbs.	6,600 lbs.	16'	3/8"	70	186"	Yellow zinc	Includes two clevis grab hooks (81438)
80311	26,400 lbs.	6,600 lbs.	20'	3/8"	70	234"	Yellow zinc	Includes two clevis grab hooks (81438)

BULK CHAIN


- Transport chain designed for binding applications
- Alloy chain designed for high working load limits
- High-test chain designed for wear and abrasion resistance
- All bulk chain is sold by the foot

Bulk#	Break Strength	Link Diameter	Grade	Finish
Proof Coil				
82116	3,200 lbs.	3/16"	30	Zinc-plated
82165	3,700 lbs.	5/0	30	Zinc-plated
82105	5,200 lbs.	1/4"	30	Zinc-plated
82170	7,600 lbs.	8/0	30	Zinc-plated
82110	7,600 lbs.	5/16"	30	Zinc-plated
82115	10,600 lbs.	3/8"	30	Zinc-plated
High-test				
82120	7,800 lbs.	1/4"	43	Zinc-plated
82125	11,700 lbs.	5/16"	43	Zinc-plated
82130	16,200 lbs.	3/8"	43	Zinc-plated
Transport				
82135	12,600 lbs.	1/4"	70	Yellow zinc-plated
82140	18,800 lbs.	5/16"	70	Yellow zinc-plated
82145	26,400 lbs.	3/8"	70	Yellow zinc-plated
82155	45,200 lbs.	1/2"	70	Yellow zinc-plated
Alloy				
82158	48,000 lbs.	1/2"	80	Raw
82160	72,400 lbs.	5/8"	80	Yellow zinc-plated

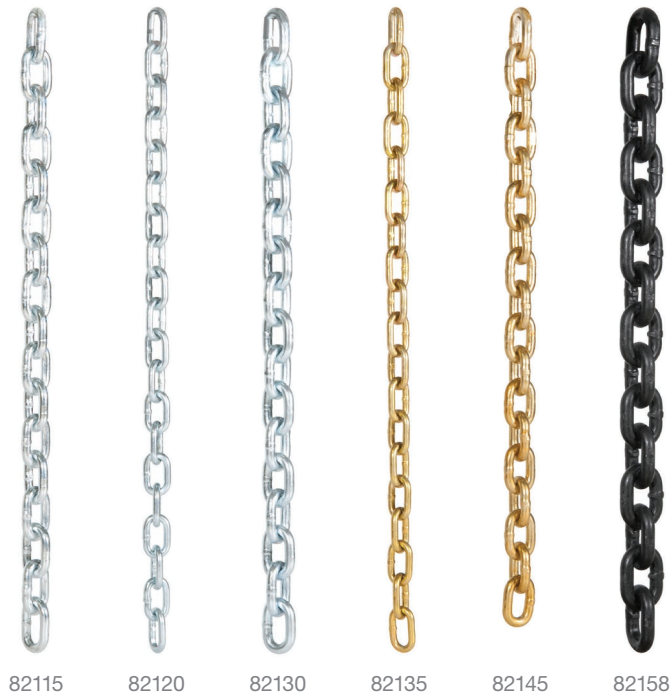

CUSTOM SAFETY CHAIN

Safety chains are required by law and should be crossed under the tongue of the trailer so that the tongue will not drop to the road if it becomes separated from the hitch. Always leave enough slack so the vehicle can safely turn. Never allow the safety chains to drag on the ground and never attach the chains to the bumper. For chain assemblies built to your exact specifications, contact your CURT sales representative or call 1.877.CURT.MFG (877.287.7213).

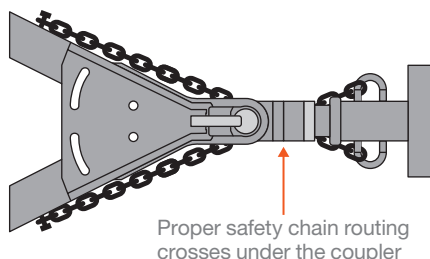

To order custom safety chain, follow these steps:

Step 1 - Determine the gross trailer weight of the trailer

Example: 12,000 lbs. GTW

Step 2 - Select chain required

Example: 82135 yellow zinc (12,600 lbs. capacity)

Note: By law each individual chain must meet or exceed the GTW of the trailer



Step 3 - Determine the required length of chain

Note: The chains must be long enough to cross one over the other under the coupling point See illustration to the left

Step 4 - Select hook(s) according to capacity and design

Example: 81940 clevis hook (12,600 lbs. capacity)



Step 5 - Contact your CURT sales representative to request a quote



QUICK LINKS

- Provides quick connections of chain, cable or rope
- Threaded link, no tools needed
- Do not exceed the work load rating
- Attractive, full color retail packaging

Bulk#	Pkg#	Two-Pack#	Work Load	Diameter	Finish
82610	82611	--	880 lbs.	1/4"	Zinc
82900	82901	82903 NEW	1,760 lbs.	5/16"	Zinc
82930	82933	--	2,200 lbs.	3/8"	Zinc
82931	--	--	2,640 lbs.	7/16"	Zinc
82932	--	--	3,300 lbs.	1/2"	Zinc



CERTIFIED S-HOOKS

- Provides quick, easy and safe connection from the tow vehicle to trailer
- Each hook must meet or exceed the trailer weight
- Heat-treated and zinc-plated for a durable finish

Bulk#	GTW	Diameter	Safety Latch
81260	2,000 lbs.	3/8"	No
81810	2,000 lbs.	3/8"	Yes
81640	3,500 lbs.	13/32"	No
81840	3,500 lbs.	13/32"	Yes
81270	5,000 lbs.	7/16"	No
81820	5,000 lbs.	7/16"	Yes
81620	7,600 lbs.	17/32"	No
81830	7,600 lbs.	17/32"	Yes



SNAP HOOKS WITH SAFETY LATCHES

- Each hook must meet or exceed the trailer weight
- Use snap hook with winches to provide a quick connection
- Attractive, full color retail packaging
- Patent# 5,664,304 (S-hooks)

Bulk#	Pkg#	GTW	Diameter
81266	81261	2,000 lbs.	3/8"
81277	81271	5,000 lbs.	7/16"
81288	81281	5,000 lbs.	9/16"
81360	--	3,500 lbs.	5/8" eye



SAFETY LATCH CLEVIS HOOKS

- Exclusive design
- Heat-treated, forged steel
- Meets requirements for high-test chain
- Yellow zinc-plated finish



81950



81560



81960



81970



81910



81980



81920



81999



81900



81940



81550

Bulk#	Grade	GTW	Hook Size	Diameter
81900	43	7,800 lbs.	1/2"	1/4"
81940	70	12,600 lbs.	1/2"	1/4"
81550	43	14,000 lbs.	3/4"	5/16"
81950	70	18,000 lbs.	3/4"	5/16"
81560	43	18,000 lbs.	1"	3/8"
81960	70	24,000 lbs.	1"	3/8"
81970	80	40,000 lbs.	1 1/3"	7/16"
81910	43	35,000 lbs.	1 1/4"	1/2"
81980	80	48,000 lbs.	1 1/4"	1/2"
81920	80	65,000 lbs.	1 1/4"	5/8"
Replacement Latch for 81950 and 81960				
81999	--	--	--	--

CLEVIS GRAB HOOKS

- Heat-treated
- Meets requirements for high-test chain

Bulk#	GTW	Hook Size	Grade	Finish
81330	2,600 lbs.	1/4"	43	Zinc-plated
81502	3,150 lbs.	1/4"	70	Yellow zinc-plated
81340	3,900 lbs.	5/16"	43	Zinc-plated
81503	4,700 lbs.	5/16"	70	Yellow zinc-plated
81350	5,400 lbs.	3/8"	43	Zinc-plated
81438	6,600 lbs.	3/8"	70	Yellow zinc-plated



81330



81502



81340



81503



81350



81438

JOINING HOOKS

- Made from 1038 steel
- Do not use for lifting

Bulk#	Finish	Description
82940	Raw	9/0 joining link
82942	Raw	7/16" joining link
82943	Zinc-plated	9/0 joining link
82944	Zinc-plated	7/16" joining link



82940



82942



82943



82944