



Bring It[®]



GOOSENECK HITCHES

Scan for live
digital version



There are trucks that turn the world under their tires and trailers that can move mountains in a day, so what about the hitch powerful enough to make the connection? The CURT gooseneck line is engineered to keep up with contractors, farmers and other hardworking individuals who need heavy-duty equipment to Bring It[®].

New for 2016 is our factory-style gooseneck ball and safety chain anchor kit for GM trucks. This kit, like our Ford and Ram kits, is designed to install quickly and securely in a pickup with a factory tow package.

CURT continues to offer under-bed and over-bed gooseneck hitches with vehicle-specific, made-in-USA installation kits. Our Double Lock EZr is designed to be one of the easiest to use and most dependable gooseneck hitches available. It features double locking pins, a one-person installation and a limited lifetime warranty. We also offer folding ball gooseneck hitches, the Quick Goose II, 5th wheel adapter plates and more, giving your customers dependable towing products that meet and exceed their expectations.

Advantages of CURT gooseneck hitches



OEM safety chain
and ball kits for GM



Complete vehicle-
specific hitch kits



Installation kits
made in the USA



OEM-COMPATIBLE GOOSENECK BALLS AND SAFETY CHAIN ANCHORS

Safety Chain Anchors

- Requires factory tow package to install into the vehicle
- Never exceed vehicle's maximum gross weight rating
- Simple drop-in installation, no tools required
- Heavy-duty, forged loops with large chain hook openings
- Patent pending

Gooseneck Balls

- Up to 30,000 lbs. GTW and 7,500 lbs. vertical load
- Easy installation with 1/4-turn latch-locking system
- Tested for safety to meet U.S. VESC V-19 specifications
- Patent# 8,955,866



60608



60617



60691




60601



60629

Bulk#	Make	Ball Size	Description	Finish
60608	Ford	--	Safety chain anchors	Gloss black
60617	Ram	--	Safety chain anchors	Gloss black
60691 NEW	Chevrolet / GMC	--	Safety chain anchors	Gloss black
60601	Ford & Ram	2 5/16"	OEM-compatible gooseneck ball	Chrome-plated
60629 NEW	Chevrolet / GMC	2 5/16"	OEM-compatible gooseneck ball	Chrome-plated



Large safety chain hook openings

30K
GTW

OEM-COMPATIBLE GOOSENECK BALL AND SAFETY CHAIN ANCHOR KITS

Kit Includes

- Safety chain anchors
- Gooseneck ball
- Rubber hole cover
- Durable storage case

Gooseneck Ball

- Up to 30,000 lbs. GTW and 7,500 lbs. vertical load
- Easy installation with 1/4-turn latch-locking system
- Patent# 8,955,866

Safety Chain Anchors

- Requires factory tow package to install into the vehicle
- Never exceed vehicle's maximum gross weight rating
- Simple drop-in installation, no tools required
- Heavy-duty, forged construction with large chain hook openings
- Patent pending



OEM-compatible gooseneck balls operate with a simple, 1/4-turn latch-locking system



60609



60618



60692

Pkg#	Make	Ball GTW / Vertical Load	Ball Size	Ball Finish	Anchor Finish
60609	Ford	30,000 / 7,500 lbs.	2 5/16"	Chrome-plated	Gloss black
60618	Ram	30,000 / 7,500 lbs.	2 5/16"	Chrome-plated	Gloss black
60692 NEW	Chevrolet / GMC	30,000 / 7,500 lbs.	2 5/16"	Chrome-plated	Gloss black

30K

GTW

RAM 2500 & 3500 GOOSENECK HITCHES

- Never exceed vehicle's maximum gross weight rating
- OEM-compatible gooseneck trailer ball for quick and easy removal
- Quickly bolts in from underneath the truck bed in 45 minutes or less
- Requires no additional hardware or installation kits
- Includes heavy-duty, 5/8" safety chain loops
- 60601 tested for safety to meet U.S. VESC V-19 specifications
- 60601 gooseneck ball patent# 8,955,866



60601 factory-style gooseneck ball operates with a simple, 1/4-turn latch-locking system

60601



60613



60614

Bulk#	GTW / Vertical Load	Ball Size	Description	Years	Finish
60613	30,000 / 7,500 lbs.	2 5/16"	Ram 3500 gooseneck hitch	13 - 16	Carbide
60614	30,000 / 7,500 lbs.	2 5/16"	Ram 2500 gooseneck hitch	14 - 15	Carbide
60601	30,000 / 7,500 lbs.	2 5/16"	OEM-compatible gooseneck ball	--	Chrome-plated

20K

GTW

X5 GOOSENECK TO 5TH WHEEL ADAPTER PLATES

- Converts Double Lock and competitive gooseneck hitches to 5th wheel rails
- For use with CURT and other common 5th wheel hitches up to 20,000 lbs.
- Not compatible with 60613 and 60614 Ram gooseneck hitches shown above



16210 - round shank



16220 - round shank



16310 - square shank

Bulk#	Shank Style	Fits
16210	Round shank	CURT 60607, 60615, 60620, 60625
16220	Round shank	CURT EZr 60611, 60612, 60619
16310	Square shank	Competitive products



Replaces Double Lock trailer ball



Quickly provides 5th wheel rails



Accepts 5th wheel hitches and rollers

30k
GTW

UNDER-BED DOUBLE LOCK EZr™ GOOSENECK HITCHES & INSTALLATION KITS

Installation kit required.
See table below



60611



Retainer clips secure the bolts supporting the center section while attaching an installation kit



Exclusive center locator saves time




Simply drill up from under the bed




Use the pilot hole for error-free drilling



Ball up, ready for coupling



Ball stored, without rubber cover



Ball protected with included cover

EASY TO INSTALL

Exclusive Center Locator

- Eliminates the need to measure where the ball hole should be
- Eliminates errors caused by drilling
- **Orange** shavings indicate when to stop drilling the trailer ball hole
- Patent# D685,299 S

Optimum Strength

- Up to 30,000 lbs. GTW
7,500 lbs. vertical load
Never exceed vehicle's max GTW
- Strong, spring-loaded 5/8" safety chain loops and grade 8 hardware
- Fortified center section
- Meets SAE J2638 testing protocol

EZr™ Installation Kits

- No measuring required - safety chain loop holes are drilled from the underside of the truck bed
- Designed for fast, easy installation
- No need to lower exhaust on Ford, Chevy or most Dodge / Ram trucks
- No need to relocate cable hanger and ground wire on Dodge / Ram trucks
- Uses carriage bolts when possible so only one wrench is needed
- Eliminates sheet metal cutting along inside of fender to insert rails

One-Person Installation

- Retainer clips secure the bolts to support the center section while attaching the installation kit

EASY TO USE

Flip-Over Ball

- Flip-and-store ball helps avoid trailer ball loss and keeps truck bed free of obstruction
- Chrome trim ring for a finished look
- Rubber trim and hole cover provide protection and prevent corrosion

Sturdy Handle

- Heavy-duty 3/8" diameter handle for solid operation

Double Lock Security

- Double-locking pins in trailer ball provide superior strength

Limited Lifetime Warranty

Double Lock EZr Gooseneck Hitches (Installation kit sold separately, see below)

Pkg#	Description	Make	Ball Size	Finish	GTW / Vertical Load
60611	Double Lock EZr gooseneck hitch	Chevrolet / GMC (11 - 16)	2 5/16"	Carbide	30,000 / 7,500 lbs.
60619 NEW	Double Lock EZr gooseneck hitch	Chevrolet / GMC (01 - 10)	2 5/16"	Carbide	30,000 / 7,500 lbs.
60612	Double Lock EZr gooseneck hitch	Dodge / Ram and Ford	2 5/16"	Carbide	30,000 / 7,500 lbs.

Double Lock EZr Gooseneck Installation Kits (Gooseneck hitch center section sold separately)

Make	Model	Years	Install Kit#	EZr Hitch Part#	Notes
Chevrolet / GMC	Silverado / Sierra 2500 and 3500	11 - 16	60605	60611	1, 2
Chevrolet / GMC	Silverado / Sierra 2500 and 3500	01 - 10	60648 NEW	60619	1
Dodge / Ram	Ram 2500	03 - 13	60660	60612	1, 2, 3, 4
Dodge / Ram	Ram 3500	03 - 12	60660	60612	1, 2, 3, 4
Ford	F-250 and F-350 Super Duty	11 - 16	60645	60612	1
Ford	F-250 and F-350 Super Duty	99 - 10	60647	60612	1

1. The passenger-side wheel well flange must be bent for frame rail access
2. Exhaust may have to be permanently lowered on power wagon and Mega cab applications

3. Check inverted ball clearance with heavy loads on two-wheel drive
~~1~~ = No frame drilling required

30K

GTW

UNDER-BED DOUBLE LOCK GOOSENECK HITCHES

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- Flip-and-store ball helps avoid trailer ball loss and keeps truck bed free of obstruction
- Heavy-duty handle can be positioned on either side of the vehicle
- Double-locking pins in trailer ball provide superior strength
- Removable, chrome-plated 2 5/16" trailer ball
- Chrome-plated trim ring provides a finished look
- Rubber trim and hole cover provide protection and prevent corrosion
- Spring-loaded safety chain loops and grade 8 hardware included
- Durable carbide powder coat finish
- **Limited lifetime warranty**




60607


Installation kit required. See guide on page 227



Ball up,
ready for coupling



Ball stored,
without rubber cover



Ball protected
with included cover



60615



60620



60625

Pkg#	Description	Make / Model	Years	Ball Size	Finish	GTW / Vertical Load
60607*	Double Lock gooseneck hitch	Fits multiple applications	--	2 5/16"	Carbide	30,000 / 7,500 lbs.
60615	Double Lock gooseneck hitch	Chevrolet 1500, new body	07 - 16	2 5/16"	Carbide	30,000 / 7,500 lbs.
60620	Double Lock gooseneck hitch	Nissan Titan	04 - 15	2 5/16"	Carbide	30,000 / 7,500 lbs.
60625	Double Lock gooseneck hitch	Toyota Tundra	00 - 06	2 5/16"	Carbide	30,000 / 7,500 lbs.

Installation kit required for these products, see guide on page 227

* Attractive, full-color retail packaging

UNDER-BED DOUBLE LOCK GOOSENECK HITCH ACCESSORIES

- Trailer balls fit all Double Lock gooseneck hitches
- Add clearance and make installation easier with gooseneck hitch accessories



60616



60602



60603



60606

Bulk#	Pkg#	Description	Ball Size	Ball Rise	Ball Offset	GTW / Vertical Load
60616	--	Replacement ball for all Double Lock gooseneck hitches	2 5/16"	--	--	30,000 / 7,500 lbs.
--	60602	Moves pivot point rearward for added cab clearance	2 5/16"	--	4"	20,000 / 5,000 lbs.
--	60603	Adds clearance for trucks with plastic or rubber bed liners	2 5/16"	1"	--	30,000 / 7,500 lbs.
60606	--	Supports gooseneck hitch for one-person installation	--	--	--	--


30k
GTW

UNDER-BED DOUBLE LOCK GOOSENECK HITCH KITS

- **Easy to order!** Determine the make and model of the vehicle - one part number includes the gooseneck hitch and the installation kit
- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
- 2 5/16" flip-and-store ball helps avoid trailer ball loss and keeps truck bed free of obstruction
- Rubber trim and hole cover provide protection and prevent corrosion
- Grade 8 mounting hardware included
- Durable finish resists rust and corrosion
- **Limited lifetime warranty on gooseneck hitches**



60607
gooseneck hitch

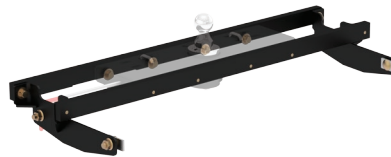

60604
installation bracket



60710
gooseneck hitch kit

Make / Model	Style	Years	Kit Part#	Hitch Part#	Rail Part#
Chevrolet / GMC					
1500 / 2500LD Silverado / Sierra	New body	07 - 16	60711	60615	60632
	Classic body	99 - 07	60712	60607	60652
2500HD / 3500 Silverado / Sierra	--	11 - 16	60710	60607	60604
		01 - 10	60712	60607	60652
2500 / 3500	Old body	99 - 00	60713	60607	60631
Full-size pickups	Excluding 34" frame (O.D.)	88 - 98	60713	60607	60631
Dodge / Ram					
Ram 1500	Air suspension	13 - 15	60731	60607	60658
	Excluding air suspension	09 - 15	60730	60607	60657
	--	02 - 08	60733	60607	60659
		94 - 01	60734	60607	60635
Ram 2500	--	03 - 13	60732	60607	60661
		03 - 12	60733	60607	60659
		94 - 02	60734	60607	60635
Ram 3500	--	03 - 12	60732	60607	60661
		03 - 12	60733	60607	60659
		94 - 02	60734	60607	60635
Ford					
F-150	--	04 - 14	60721	60607	60641
		97 - 03	60722	60607	60637
		80 - 96	60723	60607	60636
	Heritage Edition	2004	60722	60607	60637
F-250	New body	97 - 03	60722	60607	60637
	Old body	80 - 98	60723	60607	60636
F-250 / F-350 Super Duty	--	11 - 16	60720	60607	60644
		99 - 10	60720	60607	60644
F-350	Excluding overload springs	80 - 98	60723	60607	60636
	--	80 - 98	60723	60607	60636
F-450 Super Duty	Excluding Cab & Chassis	08 - 12	60720	60607	60644
Nissan					
Titan	--	04 - 15	60740	60620	60664
Toyota					
Tundra	6.5' bed	07 - 15	60751	60607	60667
	--	00 - 06	60750	60625	60665
* Requires no additional hardware or installation kit					

* Requires no additional hardware or installation kit

30K

GTW

UNDER-BED QUICK GOOSE II GOOSENECK HITCHES

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- Two-handle operation for raising and lowering ball eliminates the need to climb into the truck bed
- Drop-ball storage helps avoid trailer ball loss and keeps truck bed free of obstruction
- Chrome-plated 2 5/16" trailer ball
- Heavy-duty handles
- Chrome-plated trim ring provides a finished look
- Rubber trim and hole cover provide protection and prevent corrosion
- Spring-loaded safety chain loops and grade 8 hardware included
- Durable carbide powder coat finish
- Attractive, full-color retail packaging
- **Limited lifetime warranty**



60630


Installation kit required. See guide on page 227




Raise and lower the trailer ball without climbing in truck bed



Ball up, ready for coupling



Ball stored, without rubber cover



Ball protected with included cover

Pkg#	Description	Make	Ball Size	Finish	GTW / Vertical Load
60630	Quick Goose II gooseneck hitch	Chevrolet / GMC and Ford	2 5/16"	Carbide	30,000 / 7,500 lbs.
60640	Quick Goose II gooseneck hitch	Dodge / Ram and Ford	2 5/16"	Carbide	30,000 / 7,500 lbs.

Installation kit required for these products, see guide on page 227

30K

GTW

UNDER-BED FOLDING BALL GOOSENECK HITCH

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- Permanently attached trailer ball folds down and out of the way, eliminating theft or loss
- Bed remains flat and free of obstruction
- Spring-loaded safety chain loops and grade 8 hardware included
- Patent# D656,437 and D664,076
- Durable carbide powder coat finish
- Attractive, full-color retail packaging
- **Limited lifetime warranty**



61652

**Installation kit required.
See guide on page 227**



Pull ball pin, raise cover



Lower ball, close cover



Ball stored

Pkg#	Description	Ball Size	Finish	GTW / Vertical Load
61652	Under-bed folding ball gooseneck hitch	2 5/16"	Carbide	30,000 / 7,500 lbs.

Installation kit required for this product, see guide on page 227

UNDER-BED INSTALLATION KITS AND GOOSENECK GUIDE

- Rated to vehicle's maximum gross weight rating
Never exceed vehicle's maximum gross weight rating
- Grade 8 mounting hardware included
- Designed to fit multiple vehicles and CURT goosenecks for reduced inventory
- Made in the USA



60667

Make / Model	Style	Years	Installation Kit Part#	Double Lock	Quick Goose II	Folding Ball	Notes
Chevrolet / GMC							
Silverado / Sierra 1500 / 2500LD	New body	07 - 16	60632	60615	--	--	✗
	Classic body	99 - 07	60652	60607	60630	61652	✗
Silverado / Sierra 2500HD / 3500	--	11 - 16	60604	60607	--	--	✗
		01 - 10	60652	60607	60630	61652	4, ✗
2500 / 3500	Old body	99 - 00	60631	60607	60630	61652	✗
Full-size pickup trucks	Excluding 34" frame (O.D.)	88 - 98	60631	60607	60630	61652	✗
Dodge / Ram							
Ram 1500	Air suspension	13 - 15	60658	60607	--	--	✗
	--	09 - 15	60657	60607	--	--	✗
		02 - 08	60659	60607	60640	--	1,2, ✗
		94 - 01	60635	60607	60640	--	✗
Ram 2500	--	03 - 13	60661	60607	60640	--	1,2,6, ✗
		03 - 12	60659	60607	60640	--	1,2,6, ✗
		94 - 02	60635	60607	60640	--	6, ✗
Ram 3500	--	03 - 12	60661	60607	60640	--	1,2,6, ✗
		03 - 12	60659	60607	60640	--	1,2,6, ✗
		94 - 02	60635	60607	60640	--	6, ✗
Ford							
F-150	--	04 - 14	60641	60607	60630	61652	✗
		97 - 03	60637	60607	60630	61652	✗
		80 - 96	60636	60607	60630	61652	1, ✗
	Heritage Edition	2004	60637	60607	60630	61652	✗
F-250	New body	97 - 03	60637	60607	60630	61652	✗
	Old body	80 - 98	60636	60607	60630	61652	--
F-250 / F-350 Super Duty	--	11 - 16	60644	60607	60630	61652	3, ✗
		99 - 10	60644	60607	60640	--	3, ✗
		99 - 10	--	60607	60640	--	3, ✗
F-350	Excluding overload springs	80 - 98	60636	60607	60630	61652	✗
	--	80 - 98	60636	60607	60630	61652	--
F-450 Super Duty	Excluding Cab & Chassis	08 - 12	60644	60607	60640	--	3, ✗
		08 - 10	--	60607	60640	--	3, ✗
Nissan							
Titan	--	04 - 15	60664	60620	--	--	1, ✗
Toyota							
Tundra	6' 5" bed	07 - 15	60667	60607	--	--	5, ✗
	--	00 - 06	60665	60625	--	--	6, ✗

All models: Brake, fuel and electrical lines may need to be loosened or repositioned. Heat shield requires modification or removal.

1. Passenger side wheel well must be bent for frame rail access
2. Parking brake cable bracket may require relocation
3. Exhaust may have to be permanently lowered on '05 and newer models
4. Vacuum canister requires relocation (kit included)

5. Ball cannot be turned over, brake lines must be cable-tied (ties included)
 6. Check invert ball clearance with heavy loads on two-wheel drive
- ✗ = No frame drilling required

30K

GTW

OVER-BED FOLDING BALL GOOSENECK HITCH

- Up to 30,000 lbs. GTW / 7,500 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- Permanently attached trailer ball folds down and out of the way, eliminating theft or loss
- T-handle for easy use
- Spring-loaded safety chain loops and grade 8 hardware included
- Patent#: 5,571,270; 5,755,452; 5,435,585
- Attractive, full-color retail packaging
- Limited lifetime warranty



61052

Installation kit required.
See guide on page 229



Pull ball pin, raise cover



Lower ball, close cover



Ball stored

Pkg#	Description	Plate Size	Ball Size	Finish	GTW / Vertical Load
61052	Over-bed folding ball gooseneck hitch	12" x 14"	2 5/16"	Carbide	30,000 / 7,500 lbs.


Installation kit required for this product, see page 229

30K

GTW

OVER-BED FIXED BALL GOOSENECK HITCH

- Reinforcement required to reach max gross trailer weight rating
- Safety chain hook-ups sold separately
- Durable carbide powder coat finish



66113



61100

Bulk#	Description	Plate Size	Ball Size	Finish	GTW / Vertical Load
61100	Flat plate with fixed trailer ball	12" x 12"	2 5/16"	Carbide	30,000 / 7,500 lbs.
66113	Safety chain U-bolt kit	--	--	--	--

Installation kit required.
See guide on page 229

30K

GTW

OVER-BED FLAT PLATE GOOSENECK HITCH

- Reinforcement required to reach max gross trailer weight rating
- Durable carbide powder coat finish



65500

Installation kit required.
See guide on page 229

Bulk#	Description	Plate Size	Ball Size	Finish	GTW / Vertical Load
65500	Flat plate with fixed trailer ball and two 1/2" forged D-rings	13" x 48"	2 5/16"	Carbide	30,000 / 7,500 lbs.

30K
GTW

OVER-BED INSTALLATION KITS

- Up to 30,000 lbs. GTW
Never exceed vehicle's maximum gross weight rating
- Laser cut for precise fit
- Grade 8 mounting hardware included
- Designed to fit multiple vehicles and CURT goosenecks for reduced inventory
- Made in the USA



61321



61529



61301

Make / Model	Style	Years	30K Installation Kit Part#	Notes
Chevrolet / GMC				
1500 C/K series	Long bed	88 - 98	61503	--
	Short bed	88 - 98	61504	--
Silverado / Sierra 1500	New body	07 - 13	61331	--
	Classic body	99 - 07	61341	✗
2500 / 3500 C/K series	Long bed, old body	88 - 00	61503	--
	Short bed, old body	88 - 00	61504	--
Silverado / Sierra 2500HD / 3500	--	11 - 16	61301	✗
		01 - 10	61341	✗
Silverado / Sierra 2500LD	Classic body	99 - 07	61341	✗
Dodge / Ram				
Ram 1500	--	02 - 08	61319	✗
		94 - 01	61509	--
Ram 2500 / 3500	--	03 - 12	61529	--
		94 - 02	61509	--
Ford				
F-150	--	04 - 13	61321	✗
		97 - 03	61506	--
		80 - 96	61505	--
	Heritage Edition	2004	61506	--
F-250 / F-350	--	97 - 98	61505	--
		80 - 96	61505	--
F-250 / F-350 Super Duty	--	99 - 16	61332	✗
F-450 Super Duty	Excluding Cab & Chassis	08 - 11	61332	✗
Toyota				
Tundra	Short bed	07 - 12	61225	1
Universal				
Universal rail kit	Raw finish	--	61502	--

✗ = No drill

1 = Do not exceed recommended vehicle towing capacity.

25K

GTW

5TH WHEEL RAIL GOOSENECK HITCHES

- Four-pin installation and removal for easy access to truck bed
- Spyder includes welded trailer ball, safety chain hookups and pins & clips
- Bent plate includes pins & clips, safety chain hookups and welded trailer ball with 3" offset from front to rear
- Mounts to all industry-standard 5th wheel rails



16902



16085




16055



Attaches to
5th wheel rails



Quickly provides
gooseneck hitch



Attaches to
5th wheel rails



Bent plate
provides 3" offset

Pkg#	Description	Ball Size	Finish	GTW
16085	Spyder gooseneck hitch	2 5/16"	Carbide	25,000 lbs.
16055	Bent plate gooseneck hitch with 3" offset	2 5/16"	Carbide	25,000 lbs.
16902	Replacement rail pins & clips	--	Yellow zinc	--

UNIVERSAL 5TH WHEEL BASE RAILS

- Can be used with all CURT and competitive 5th wheel hitches, rollers, bent plate and Spyder gooseneck hitches that fit industry standard rails
- Some vehicles require semi-custom brackets, see page 244



16150




16100 gloss
16200 carbide




16104 gloss rails
16204 carbide rails
16101 brackets

Bulk#	Multi-Pack#	Description	Includes	Finish
16150	--	Two 5th wheel base rails, four-bolt	Brackets and hardware	Gloss black
16104	--	Two 5th wheel base rails	--	Gloss black
16204	--	Two 5th wheel base rails	--	Carbide
16100	--	Two 5th wheel base rails	Brackets and hardware (16101)	Gloss black
16200	--	Two 5th wheel base rails	Brackets and hardware (16101)	Carbide
16101	--	Installation brackets and hardware	--	Zinc-plated
16111	--	Replacement installation hardware kit	--	Zinc-plated
16103	16103010	Replacement rail bolts, needed when reinstalling used rails	16103 - eight bolts 16103010 - 10 sets of eight bolts	Zinc-plated



16103 &
16103010
(10 sets)



16111



ORIGINAL EQUIPMENT VEHICLE-TO-TRAILER EXTENSION

- Makes the electrical connections of gooseneck and 5th wheel trailers easy
- Routes existing 7-way plug at rear of vehicle into truck bed

Pkg#	Length	Fits
56080	7'	7-way RV blade socket



56080



CUSTOM VEHICLE-TO-TRAILER WIRING HARNESS EXTENSIONS

- Adds an additional 7-way RV blade socket to the truck bed while retaining use of the existing 7-way RV blade socket
- Makes the electrical connections of gooseneck and 5th wheel trailers easy by plugging into the factory harness

Make / Model	Years	7' Pkg#	10' Pkg#
Chevrolet / GMC			
Silverado / Sierra	99 - 16	56070	56000
Dodge / Ram			
Dakota	95 - 10	56071	56001
Ram 1500	09 - 16	56070	56000
	95 - 08	56071	56001
Ram 2500 / 3500	10 - 16	56070	56000
	95 - 09	56071	56001
Ford			
F-150	15 - 16	57008* NEW	57010* NEW
F-150	97 - 14	56070	56000
F-250 Light Duty	97 - 03	56070	56000
F-250 / F-350 Super Duty	99 - 16	56070	56000
F-450 / F-550 Super Duty	99 - 16	56070	56000
Nissan			
Titan	04 - 14	56070	56000
Toyota			
Tundra	10 - 16	56070	56000

* Includes 57007 isolator kit to prevent corrosion of aluminum body



56000




56001



Route 7-way socket into truck bed (7')



Route 7-way socket into truck bed (10')



Right-angle plug for easy installation



BRAKE CONTROLS

- All brake controls are quick plug equipped, making installation fast and easy
- See page 190 for our complete brake control line



51140



**MADE
IN USA**



51130

Model Name	Pkg#	Six-Pack#	Spare Bracket#	Number of Axles	Activation Method	Display	Vertical Mount Angle	Level Adjust	Warranty
TriFlex	51140	51142	51144	1 - 4	Inertia tri-axis accelerometer	Digital	-20° to +70°	Auto	Limited lifetime
Reflex	51130	51132	--	1 - 4	Inertia dual-axis accelerometer	Digital	Any	Auto	Limited lifetime
Discovery	51120	51122	51124	1 - 4	Time-based	Digital	Any	Auto	Limited lifetime
Venturer	51110	--	51114	1 - 3	Time-based	LED	Any	Auto	Limited lifetime