



# TOWING ACCESSORIES

## CONFIDENCE FOR THE ROAD AHEAD


CURT offers a complete line of towing accessories to give your customers a safe, successful journey every time. New for 2018, we have added 3" shank options to our ball mount line, as well as 3" pins & clips and a 3" reducer sleeve. These new heavy-duty products offer the perfect fit for the new Ford Super Duty hitch or any hitch with a 3" x 3" receiver. CURT towing accessories are not only a practical addition to your customer's towing setup, but they are also a great way to increase sales in your store.

# FEATURED PRODUCTS



## 3" ball mounts

These heavy-duty ball mounts are the perfect complement to trailer hitches with a 3" x 3" receiver tube opening.

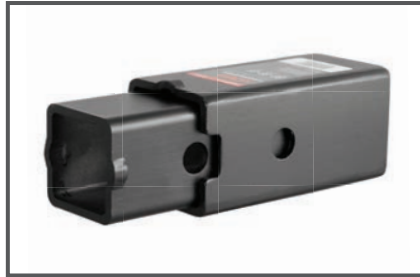

## 3" reducer sleeve set

To allow 3" receivers to work with a variety of CURT ball mounts and other products, this set reduces from 3" to 2 1/2" or 2".



## Adjustable channel mounts

Our patented channel mounts are highly adjustable and have a built-in anti-rattle. We carry 2" and 2 1/2" shank options.

# PRODUCT INDEX



**197**  
Ball  
Mounts



**203**  
Forged Ball  
Mounts



**204**  
Adjustable  
Channel Mounts



**210**  
Tow Hook  
Mounts



**212**  
Extenders  
& Adapters



**214**  
Pintles &  
Lunette Eyes



**218**  
Trailer  
Balls



**222**  
Hitch & Coupler  
Lock Sets



**227**  
Hitch  
Pins & Clips



**229**  
Fab  
Components



**230**  
Trailer Hitch  
Accessories



**232**  
RV Towing  
Products



# ACCESSORIES OVERVIEW

## Ball Mounts

The majority of our ball mounts are made in the USA. We use CNC-forming and robotic welding for the utmost accuracy, and each is protected with a durable powder coat finish.

- 1 1/4", 2", 2 1/2" and 3" shank options
- GTW capacities ranging from 2,000 up to 20,000 lbs.
- [See page 197 for ball mounts](#)



## Pintles & Lunette Eyes

Pintle hitches are widely used in agriculture, construction and the military. We offer standard pintle hooks and mounts, ball and pintle combinations and receiver-mount pintles.

- GTW capacities up to 60,000 lbs.
- 2" and 2 1/2" shank options available
- [See page 214 for pintle products](#)

## Towing Security

CURT carries several styles of hitch locks and coupler locks to fit any receiver tube or coupler latch. We also offer a number of specialty locks, including 5th wheel hitch locks.

- Pins available to fit 1 1/4", 2", 2 1/2" and 3" receivers
- Convenient 1/4-turn lock activation on most models
- [See page 222 for towing security products](#)

## Hitch Accessories

Some of the other trailer hitch accessories we offer include front mount accessories, hitch tube covers, fish wire and a finishing pack for trailer hitch and electrical installations.

- Front accessories include winch and skid plates
- Hitch tube covers for 1 1/4", 2", 2 1/2" and 3"
- [See page 230 for hitch accessories](#)

## Trailer Balls

We offer trailer balls for any and every job. They are available in three different finish options, including stainless steel, and all are tested to meet U.S. VESC specifications for safety.

- Standard diameters of 1 7/8", 2" 2 5/16" and 3"
- GTW capacities ranging from 2,000 up to 30,000 lbs.
- [See page 218 for trailer balls](#)

## Fab Components

CURT fabrication components are the perfect building blocks for a variety of DIY welding project. Most components are made in the USA and come with a raw finish for ready welding.

- Hitch bars ranging from 8" to 24" long
- Receiver tubing available in 1 1/4", 2" and 2 1/2"
- [See page 229 for fabrication components](#)


## RV Towing

CURT has what your customers need to outfit their RV for the ultimate road trip. Our hitches, tow bars and electrical products make it easy to tow a trailer or dinghy tow a vehicle.

- Adjustable RV and bumper hitches with 2" receiver
- RV harnesses offer a custom fit for dinghy towing
- [See page 232 for RV towing products](#)

# BALL MOUNTS

## Measuring a ball mount

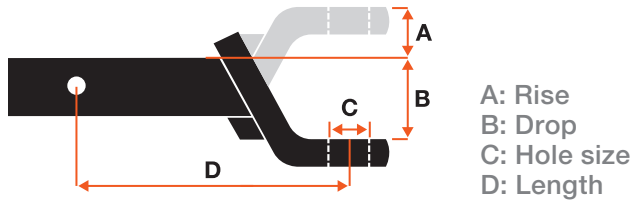

## 1 1/4 INCH & 2 INCH TOWING STARTER KITS

- Includes all the accessories needed to complement a trailer hitch in one kit
- Reusable case is able to be shelved or hung on pegs (#45534, #45554)



Part#	Shank Size	GTW / TW	Ball Diameter	Drop	Rise	Length	Included Parts
45141	2"	7,500 / 750 lbs.	2"	2"	--	7 1/2"	45134 Fusion ball mount, 23021 hitch lock
45142	2"	7,500 / 750 lbs.	2"	4"	--	8 1/8"	45154 Fusion ball mount, 23021 hitch lock
45148	1 1/4"	3,500 / 350 lbs.	2"	3 1/4"	2 5/8"	7 1/4"	45521 ball mount, 40003 trailer ball, 21403 pin & clip
45147	1 1/4"	3,500 / 350 lbs.	2"	1 1/4"	3/4"	9 3/4"	45519 ball mount, 40003 trailer ball, 21403 pin & clip
45534*	2"	7,500 / 750 lbs.	2"	2"	3/4"	8 1/4"	45030 ball mount, 40037 trailer ball, 23515 hitch lock, 22272 hitch tube cover, 21500 pin & clip, case
45554*	2"	7,500 / 750 lbs.	2"	4"	2"	8 1/4"	45050 ball mount, 40037 trailer ball, 23515 hitch lock, 22272 hitch tube cover, 21500 pin & clip, case

\*Sturdy, reusable case included

# ADVANTAGES OF THE EURO MOUNT®

If your customer is looking for a simple, maintenance-free 1 1/4" ball mount option, the Euro Mount® is the perfect choice. With the Euro Mount®, there are fewer installation requirements, and it is easy to choose the right fit. Take a look below to find the Euro Mount® that works best for your customer's towing needs.



No tools or torque specs required



Permanently attached trailer ball



Engineered with a sleek, modern look

## Each Euro Mount® was designed to replace a common, old-style ball mount, making trailer ball installation unnecessary

The comparisons below illustrate which Euro Mount® replaces a common, old-style ball mount



45561 Euro Mount® vs 45520 old-style



45591 Euro Mount® vs 45522 old-style



45571 Euro Mount® vs 45521 old-style




45581 Euro Mount® vs 45521 old-style



45551 Euro Mount® vs 45518 old-style

## Measuring a Euro Mount®

Required Ball Height = A - B

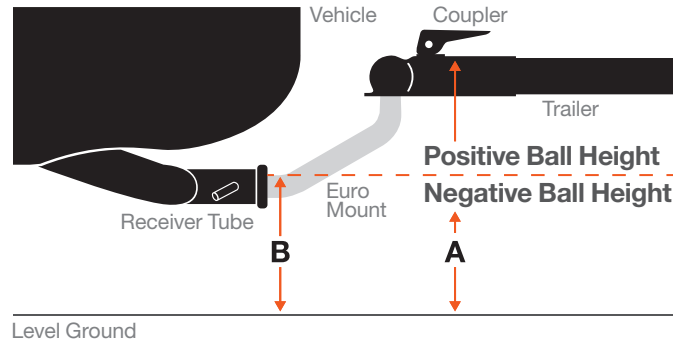

## 1 1/4 INCH EURO MOUNT® BALL MOUNTS

- Fits any 1 1/4" x 1 1/4" receiver tube opening
- Installs easily with no tools or torque specifications required
- Permanently attached trailer ball cannot be loosened or stolen
- Protected by a highly durable carbide powder coat finish
- Patents: D610,051 S; D610,492 S; D610,493 S; D610,494 S; D610,954 S

Part#	GTW / TW	Ball Diameter	Ball Height	Length
45551	3,500 / 350 lbs.	1 7/8"	2 3/4"	10"
45571	3,500 / 350 lbs.	1 7/8"	4 5/8"	7 1/4"
45561	3,500 / 350 lbs.	1 7/8"	5 1/8"	9 3/4"
45591	3,500 / 350 lbs.	1 7/8"	5 1/8"	11 1/4"
45581	3,500 / 350 lbs.	1 7/8"	- 3/4"	8 3/4"
45552	3,500 / 350 lbs.	2"	2 3/4"	10"
45572	3,500 / 350 lbs.	2"	4 5/8"	7 1/4"
45562	3,500 / 350 lbs.	2"	5 1/8"	9 3/4"
45592	3,500 / 350 lbs.	2"	5 1/8"	11 1/4"
45582	3,500 / 350 lbs.	2"	- 3/4"	8 3/4"



45551 (1 7/8" ball)  
45552 (2" ball)



45571 (1 7/8" ball)  
45572 (2" ball)



45561 (1 7/8" ball)  
45562 (2" ball)



45591 (1 7/8" ball)  
45592 (2" ball)



45581 (1 7/8" ball)  
45582 (2" ball)

**1 1/4**  
INCH

# CLASS 1 & 2 BALL MOUNTS

- Fits any 1 1/4" x 1 1/4" receiver tube opening
- Multiple drop and rise options to accommodate various vehicle-trailer combinations
- Hollow shanks can be used with an anti-rattle kit



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Shank Type	Finish
<b>Class 1 Ball Mounts</b>							
45018	2,000 / 200 lbs.	1 1/4"	5/8"	6 3/4"	3/4"	Hollow	Gloss black
45019	2,000 / 200 lbs.	1 1/4"	5/8"	9 3/4"	3/4"	Hollow	Gloss black
45027	2,000 / 200 lbs.	3 1/4"	2 5/8"	6 1/4"	3/4"	Hollow	Gloss black
45022	2,000 / 200 lbs.	3 1/4"	2 5/8"	7 1/4"	3/4"	Hollow	Gloss black
45026	2,000 / 200 lbs.	3 1/4"	2 5/8"	9 3/8"	3/4"	Hollow	Gloss black
45028	2,000 / 200 lbs.	6"	4 5/8"	5 9/16"	3/4"	Solid	Gloss black
45021	2,000 / 200 lbs.	--	3"	9 1/2"	3/4"	Solid	Gloss black
45023	2,000 / 200 lbs.	--	3 3/4"	11 1/2"	3/4"	Solid	Gloss black
45024	2,000 / 200 lbs.	--	5"	9 9/16"	3/4"	Solid	Gloss black
45025	2,000 / 200 lbs.	--	5"	11 9/16"	3/4"	Solid	Gloss black
<b>Class 2 Ball Mounts</b>							
45503	3,500 / 350 lbs.	1"	3/8"	7 13/16"	3/4"	Solid	Gloss black
45518	3,500 / 350 lbs.	1 1/4"	3/4"	6 3/4"	3/4"	Solid	Gloss black
45519	3,500 / 350 lbs.	1 1/4"	3/4"	9 3/4"	3/4"	Solid	Gloss black
45017	3,500 / 350 lbs.	3 1/4"	2 5/8"	6 1/4"	3/4"	Solid	Gloss black
45521	3,500 / 350 lbs.	3 1/4"	2 5/8"	7 1/4"	3/4"	Solid	Gloss black
45016	3,500 / 350 lbs.	3 1/4"	2 5/8"	9 3/8"	3/4"	Solid	Gloss black
45520	3,500 / 350 lbs.	--	3 1/8"	9 3/4"	3/4"	Solid	Gloss black
45510	3,500 / 350 lbs.	--	3 1/8"	10 5/16"	3/4"	Solid	Gloss black
45522	3,500 / 350 lbs.	--	3 1/8"	11 1/4"	3/4"	Solid	Gloss black
45000	3,500 / 350 lbs.	--	3 7/8"	13 1/2"	3/4"	Solid	Gloss black
45014	3,500 / 350 lbs.	--	5"	9 5/8"	3/4"	Solid	Gloss black
45015	3,500 / 350 lbs.	--	5"	11 5/8"	3/4"	Solid	Gloss black

# 2

INCH

# CLASS 3 BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Multiple drop and rise options to accommodate various vehicle-trailer combinations
- Increased drop on select models allows for level towing with lifted vehicles
- Hollow shanks can be used with an anti-rattle kit
- White box kits include a pin & clip



Black Bulk#	Chrome Bulk#	Retail Pkg#	White Box Kit#	With Pin & Clip Poly Bag#	GTW / TW	Drop	Rise	Length	Hole Size
45030	45290	45031	45032	45033	7,500 / 750 lbs.	2"	3/4"	7 1/2"	1"
45010	--	45011	45012	--	7,500 / 750 lbs.	2"	3/4"	8 1/4"	1"
45040	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	10 1/4"	1"
45020	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	10 1/4"	1"
45260	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	12 1/4"	1"
45250	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	12 1/4"	1"
45050	45296	45051	45052	--	7,500 / 750 lbs.	4"	2"	8 1/4"	1"
45060	--	--	--	--	7,500 / 750 lbs.	4"	2"	10 1/4"	1"
45270	--	--	--	--	7,500 / 750 lbs.	4"	2"	13"	1"
45070	45297	--	--	--	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	6"	4"	9 1/4"	1"
45080	--	--	--	--	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	6"	4"	12 1/4"	1"
45280	--	--	--	--	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	6"	4"	14 1/4"	1"
45090	--	--	--	--	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	8"	6"	11 1/2"	1"
45100	--	--	--	--	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	8"	6"	13"	1"
45110	--	--	--	--	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	10"	8"	13"	1"
45112	--	--	--	--	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	10"	8"	14"	1"

## 2 INCH RIGHT-ANGLE BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Angled shank allows for easier insertion into the receiver tube
- Hollow shanks can be used with an anti-rattle kit



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45047	7,500 / 750 lbs.	2"	3/4"	10 1/4"	1"	Gloss black
45067	7,500 / 750 lbs.	4"	2"	10 1/4"	1"	Gloss black
45087	7,500 / 750 lbs. drop	6"	4"	12 1/4"	1"	Gloss black
	6,000 / 600 lbs. rise					



## 2 INCH DUAL-LENGTH BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Two hitch pin holes for varying length
- Hollow shanks can be used with an anti-rattle kit



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45220	7,500 / 750 lbs.	2"	3/4"	7 1/2" or 10 1/2"	1"	Gloss black
45230	7,500 / 750 lbs.	4"	2"	8 1/8" or 11 1/8"	1"	Gloss black
45240	7,500 / 750 lbs. drop	6"	4"	9 1/4" or 12 1/4"	1"	Gloss black
	6,000 / 600 lbs. rise					





**2**

INCH

## CLASS 4 BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Increased drop allows for level towing with lifted vehicles
- Hollow shanks can be used with an anti-rattle kit



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Shank Type	Finish
45310	10,000 / 1,000 lbs.	2"	1"	9 3/8"	1 1/4"	Hollow	Gloss black
45311	10,000 / 1,000 lbs.	4"	2 3/4"	9 3/8"	1 1/4"	Hollow	Gloss black
45336	10,000 / 1,000 lbs.	6"	4 3/4"	9 3/8"	1 1/4"	Hollow	Gloss black
45338	10,000 / 1,000 lbs.	8"	6 3/4"	9 3/8"	1 1/4"	Hollow	Gloss black
45312	12,000 / 1,200 lbs.	2"	1"	9 3/8"	1 1/4"	Solid	Gloss black
45313	12,000 / 1,200 lbs.	4"	3"	9 3/8"	1 1/4"	Solid	Gloss black
45446	12,000 / 1,200 lbs.	6"	5"	9 3/8"	1 1/4"	Solid	Gloss black
45448	12,000 / 1,200 lbs.	8"	7"	9 3/8"	1 1/4"	Solid	Gloss black

**2 1/2**

INCH

## COMMERCIAL DUTY BALL MOUNTS

- Fits any 2 1/2" x 2 1/2" receiver tube opening
- Ideal for CURT class 5 Commercial Duty trailer hitches (page 15)
- Shank constructed from solid steel for optimum strength



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45425	15,000 / 1,500 lbs.	3"	1 1/2"	9 1/2"	1 1/4"	Carbide
45426	15,000 / 1,500 lbs.	5"	3 1/2"	10"	1 1/4"	Carbide
45427	15,000 / 1,500 lbs.	8"	6 1/4"	10 1/2"	1 1/4"	Carbide

# 2 INCH & 2½ INCH & 3 INCH FORGED BALL MOUNTS

- Fits 2", 2 1/2" or 3" receiver tube openings
- Ideal for CURT class 5 Xtra Duty and Commercial Duty trailer hitches (page 15)
- Constructed from solid, forged steel for superior strength



Part#	Shank Size	GTW / TW	Drop	Rise	Length	Hole Size	Finish
<b>2" x 2" Xtra Duty Forged Ball Mounts</b>							
45340	2" x 2"	17,000 / 2,550 lbs.	2"	1"	8 1/2"	1 1/4"	Carbide
45341	2" x 2"	17,000 / 2,550 lbs.	4"	3"	8 1/2"	1 1/4"	Carbide
45342	2" x 2"	17,000 / 2,550 lbs.	6"	5"	9 1/2"	1 1/4"	Carbide
<b>2 1/2" x 2 1/2" Commercial Duty Forged Ball Mounts</b>							
45456	2 1/2" x 2 1/2"	20,000 / 2,700 lbs.	2"	1/2"	8 1/2"	1 1/4"	Carbide
45458	2 1/2" x 2 1/2"	20,000 / 2,700 lbs.	4"	2 1/2"	8 1/2"	1 1/4"	Carbide
<b>3" x 3" Industrial Duty Forged Ball Mounts</b>							
45430 <b>NEW</b>	3" x 3"	21,000 / 2,800 lbs.	4"	2"	9"	1 1/4"	Carbide
45431 <b>NEW</b>	3" x 3"	21,000 / 2,800 lbs.	6"	4"	10"	1 1/4"	Carbide
45432 <b>NEW</b>	3" x 3"	21,000 / 2,800 lbs.	8"	6"	10 1/2"	1 1/4"	Carbide



**2** INCH & **2 1/2** INCH **ADJUSTABLE CHANNEL MOUNTS**

**⚠️ Weight capacities limited to the lowest rated towing component**


- Adjustable channel mount allows for precise trailer leveling
- Shank can be flipped to maximize rise or drop
- Built-in anti-rattle helps promote quiet towing
- Channels measure 3" wide (I.D.) with holes spaced 1" on center
- Ball mount and dual-ball mounts include pins & clips
- Pintle mounts include safety pin (#25012)
- Protected by a durable carbide powder coat finish
- See page 205 for replacement parts
- Patent# US8,033,563 (#45900, #45901, #45902)
- **Five-year limited warranty (#45900, #45901, #45902)**



Built-in anti-rattle prevents shaking (45901 and 45902)



Built-in anti-rattle prevents shaking (45900)



Locks secure mount (sold separately)



45901



45900



45902



45919  
45920  
45922

Pkg#	Shank Size	Ball Mount GTW / TW	2" Ball GTW / TW	2 5/16" Ball GTW / TW	Max Drop	Max Rise	Length	Hole Size
45901	2"	6,000 / 600 lbs.	--	--	6 3/4"	5 1/4"	11" and 12"	1"
45900	2"	--	10,000 / 1,000 lbs.	14,000 / 1,400 lbs.	6"	5 1/4"	11" and 12"	--
45902	2 1/2"	--	10,000 / 1,000 lbs.	20,000 / 2,000 lbs.	6"	5 1/4"	11" and 12"	--
45919*	--	--	10,000 lbs.	--	--	--	--	1 1/4"
45920*	--	--	--	13,000 lbs.	--	--	--	1 1/4"
45922*	--	--	--	20,000 lbs.	--	--	--	1 1/4"

\* Pins not included (see page 205 for pin options)





**2** INCH & **2 1/2** INCH

# ADJUSTABLE CHANNEL MOUNT REPLACEMENT PARTS


- Shanks can be flipped to maximize rise or drop
- Built-in anti-rattle helps promote quiet towing
- Shank channels measure 3" wide (I.D.) with holes spaced 1" on center
- Shanks are protected by a highly durable carbide powder coat finish
- #23556 replaces adjustable channel mount pins for increased security
- #45916 replaces the anti-rattle kit for the adjustable channel mount #45901 or #45902
- #45925 replaces the pins for the adjustable channel mounts



Built-in anti-rattle prevents shaking



Pins & clips secure mount into place



Locks secure the mount from theft



45911



45910



45917



45912



45923



45916



45915



45925



23556

Pkg#	Description	GTW / TW	Shank Size	Length	Fits
45910	Replacement shank	14,000 / 1,400 lbs.	2" x 2"	11" and 12"	45900
45911	Replacement shank	6,000 / 600 lbs.	2" x 2"	11" and 12"	45901
45917	Replacement shank	20,000 / 2,000 lbs.	2 1/2" x 2 1/2"	11" and 12"	45902
45912 <b>NEW</b>	Replacement dual-ball	See 45900	--	--	45910 & 45911 shanks
45923 <b>NEW</b>	Replacement dual-ball	See 45902	--	--	45917 shank
23556	Lock set, 5/8" diameter	--	--	--	2" and 2 1/2" receiver tubes and channel mounts
45915*	Replacement pins, 5/8" diameter	--	--	4 1/4"	2" channel mounts
45925	Replacement pins, 5/8" diameter	--	--	4 1/2"	2" and 2 1/2" channel mounts
45916	Anti-rattle replacement kit	--	--	--	All adjustable channel mounts

\* Continued while supplies last



2

INCH

## ADJUSTABLE TRI-BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Adjustable height allows for precise trailer leveling
- Includes three 5/8" diameter pins & clips



Bulk#	Pkg#	Description	GTW	Ball Diameter	Max Drop	Max Rise	Length
--	45799	Complete tri-ball assembly	6,000 / 7,500 / 10,000 lbs.	1 7/8", 2", 2 5/16"	5 3/4"	5 3/4"	16"
45800	--	Replacement tri-ball head for 45799	6,000 / 7,500 / 10,000 lbs.	1 7/8", 2", 2 5/16"	--	--	--
45059	--	Adjustable shank for 45799 or 45008	10,000 lbs.	--	5 3/4"	5 3/4"	8 3/4"
45802	--	Replacement tube mount for 45799	10,000 lbs.	--	--	--	--

2

INCH

## ADJUSTABLE MULTI-PURPOSE BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Features two welded trailer balls and removable clevis bar for lunette eyes
- Adjustable height allows for precise trailer leveling
- Includes three 5/8" diameter pins & clips (#45049)
- Patent# 8,534,695



Bulk#	Pkg#	Description	Ball Diameter and Maximum GTW / TW		Max Drop	Max Rise	Length
			2"	2 5/16"			
--	45049	Complete mount and shank assembly	7,500 / 750 lbs.	10,000 / 1,000 lbs.	6 1/2"	6 11/16"	14 3/16"
45008	--	Replacement head for 45049	7,500 / 750 lbs.	10,000 / 1,000 lbs.	--	--	--
45059	--	Adjustable shank for 45008 or 45799	10,000 / 1,000 lbs. - no ball included		--	--	--

2

INCH

## ADJUSTABLE BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Adjusts in 1 1/2" increments for precise trailer leveling
- Hollow shank can be used with an anti-rattle kit
- Includes pin & clip (#21500)

Part#	GTW / TW	Max Drop	Max Rise	Length	Hole Size	Finish
45812	5,000 / 500 lbs.	7 1/2"	6 1/4"	12 1/2"	1"	Gloss black



## 2 MULTI-BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Allows for quick switching between trailer ball sizes
- Permanently attached trailer balls cannot be loosened or stolen
- Hollow shanks can be used with an anti-rattle kit



Part#	Trailer Balls	Ball Diameter and Maximum GTW / TW			Length	Shank Type	Ball Finish	Shank Finish
		1 7/8"	2"	2 5/16"				
45660	2	--	7,500 / 750 lbs.	10,000 / 1,000 lbs.	8 1/2"	Solid	Black	Gloss black
45665	2	--	7,500 / 750 lbs.	10,000 / 1,000 lbs.	8 1/2"	Solid	Chrome	Gloss black
45002	2	--	7,500 / 750 lbs.	10,000 / 1,000 lbs.	8 1/2"	Hollow	Chrome	Gloss black
45675*	3	3,500 / 350 lbs.	5,000 / 500 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Solid	Chrome	Gloss black
45650	3	5,000 / 500 lbs.	7,500 / 750 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Solid	Black	Gloss black
45655	3	5,000 / 500 lbs.	7,500 / 750 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Solid	Chrome	Gloss black
45001	3	5,000 / 500 lbs.	7,500 / 750 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Hollow	Chrome	Gloss black

\* Tow hook limited to trailer hitch capacity

## 2 REVERSIBLE BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Allows for quick switching between trailer ball sizes and drop or rise
- Permanently attached trailer balls cannot be loosened or stolen
- Hollow shanks can be used with an anti-rattle kit



Part#	Ball Diameter and Maximum GTW / TW			Drop	Rise	Length	Shank Type	Finish
	1 7/8"	2"	2 5/16"					
45643	6,000 / 600 lbs.	7,500 / 750 lbs.	--	4" (1 7/8" ball)	2" (2" ball)	10 1/2"	Hollow	Gloss black
45644	--	7,500 / 750 lbs.	7,500 / 750 lbs.	4" (2" ball)	2" (2 5/16" ball)	10 1/2"	Hollow	Gloss black

2

INCH

## LOADED BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Includes a factory-torqued trailer ball and pin & clip
- Three-packs include an informative point-of-purchase tray
- Hollow shanks can be used with an anti-rattle kit

45037  
multi-pack45034 (1 7/8" ball)  
45036 (2" ball)  
45041 (2 5/16" ball)45293 (1 7/8" ball)  
45295 (2" ball)45055 (1 7/8" ball)  
45056 (2" ball)  
45042 (2 5/16" ball)

45331



45332

Part#	White Box#	Three-Pack#	GTW / TW	Ball Diameter	Drop	Length	Shank Type	Finish
45034	--	45035	3,500 / 350 lbs.	1 7/8" (40002)	2"	8 1/4"	Hollow	Gloss black
--	45293	--	3,500 / 350 lbs.	1 7/8" (40002)	2"	8 1/4"	Hollow	Chrome
45036	--	45037	7,500 / 750 lbs.	2" (40037)	2"	8 1/4"	Hollow	Gloss black
--	45295	--	7,500 / 750 lbs.	2" (40037)	2"	8 1/4"	Hollow	Chrome
45041	--	45041003	7,500 / 750 lbs.	2 5/16" (40005)	2"	8 1/4"	Hollow	Gloss black
45331	--	--	15,000 / 1,500 lbs.	2 5/16" (40030)	2"	8 1/2"	Solid	Carbide
45055	--	--	3,500 / 350 lbs.	1 7/8" (40002)	4"	8 1/4"	Hollow	Gloss black
45056	--	45057	7,500 / 750 lbs.	2" (40037)	4"	8 1/4"	Hollow	Gloss black
45042	--	45042003	7,500 / 750 lbs.	2 5/16" (40005)	4"	8 1/4"	Hollow	Gloss black
45332	--	--	15,000 / 1,500 lbs.	2 5/16" (40030)	4"	8 1/2"	Solid	Carbide

2

INCH

## FUSION BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Includes a welded trailer ball and pin & clip
- Permanently attached trailer ball cannot be loosened or stolen
- Two-mount multi-packs include an informative point-of-purchase tray
- Hollow shanks can be used with an anti-rattle kit

45131 (1 7/8" ball)  
45134 (2" ball)45151 (1 7/8" ball)  
45154 (2" ball)45152 (1 7/8" ball)  
45155 (2" ball)45136  
Two-pack45158  
Two-pack

Part#	Two-Pack#	GTW / TW	Ball Diameter	Drop	Rise	Length	Finish
45131	45136	5,000 / 500 lbs.	1 7/8"	2"	--	7 1/2"	Gloss black
45134	45139	7,500 / 750 lbs.	2"	2"	--	7 1/2"	Gloss black
45151	45156	5,000 / 500 lbs.	1 7/8"	4"	--	8 1/8"	Gloss black
45154	45158	7,500 / 750 lbs.	2"	4"	--	8 1/8"	Gloss black
45152	--	5,000 / 500 lbs.	1 7/8"	--	2"	8 1/8"	Gloss black
45155	--	7,500 / 750 lbs.	2"	--	2"	8 1/8"	Gloss black

**2**  
INCH

## CLEVIS PIN BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Clevis pin accepts a tow hook or strap
- Can also be used as a standard ball mount
- Includes clevis pin (trailer ball sold separately)
- Solid steel shank for optimum strength



45821



45821 shown with 40004 ball (not included)

Part#	GTW / TW	Length	Hole Size	Finish
45821	6,000 / 600 lbs.	8 3/4"	1"	Gloss black

**2**  
INCH

## SWAY TAB BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Provides a mounting tab for a sway control trailer ball (ball sold separately)
- Hollow shank can be used with an anti-rattle kit
- See page 316 for sway control units and balls



45820



45820 shown with 40093 ball (not included)



Sway control 17200 attached

Part#	GTW / TW	Drop	Rise	Length	Hole Size
45820	7,500 / 750 lbs.	2"	3/4"	7 1/2"	1"

**1 1/4**  
INCH

&

**2**  
INCH

## VERTICAL RECEIVER TUBE BALL MOUNTS

- Converts a vertical receiver tube into a ball mount tongue (#45507, #45003)
- Adapts a 2" vertical receiver into a 2" standard receiver (#45013)



45507



45003



45013

Part#	Shank Size	GTW / TW	Hole Size	Adapts From	Adapts To	Length	Finish
45507	1 1/4"	3,500 / 300 lbs.	3/4"	Vertical 1 1/4"	Ball mount tongue	9 3/4"	Gloss black
45003	2"	4,000 / 400 lbs.	1"	Vertical 2"	Ball mount tongue	9"	Gloss black
45013	2"	5,000 / 500 lbs.	--	Vertical 2"	Standard 2"	4 1/4"	Gloss black



2

INCH

## WELDED D-RING BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Welded D-ring accepts tow straps or hooks
- Angled shank allows for easier insertion into the receiver tube
- Hollow shank can be used with an anti-rattle kit
- Patent# 8,226,107



45004

Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45004	7,500 / 750 lbs. drop	6"	4"	10"	1"	Gloss black
	6,000 / 600 lbs. rise					



Easy to insert into receiver tube

2

INCH

&amp;

2 1/2

INCH

## TOW HOOK MOUNTS

- Fits 2" or 2 1/2" receiver tube openings
- GTW and TW are limited to trailer hitch capacity



45831

NEW



45832

NEW



45825



45500



45832 with strap

Part#	Shank Size	Description	Length	Finish
45831 <b>NEW</b>	2 1/2"	Use with tow straps, complete with shackle and solid shank	7 1/2"	Carbide
45832 <b>NEW</b>	2"	Use with tow straps, complete with shackle and solid shank	7 1/2"	Carbide
45825	2"	Use with 83066 vehicle recovery strap or similar	7 1/2"	Gloss black
45500	2"	Use with 83066 vehicle recovery strap or similar	10"	Carbide

## TOW HOOKS & TOW STRAP

See page 335  
for chain options

- Commonly used on 4WD pickups, SUVs and vans
- Constructed from forged, heat-treated steel
- Spring clip provides added security for rope or strap attachment



83066



22420



22430



22401



22411

Bulk#	Pkg#	Capacity	Break Strength	Finish	Description
--	22401	10,000 lbs.	--	Chrome-plated	Tow hook with hardware
--	22411	10,000 lbs.	--	Black	Tow hook with hardware
22420	--	10,000 lbs.	--	Chrome-plated	Tow hook
22430	--	10,000 lbs.	--	Black	Tow hook
83066	--	9,000 lbs. GVW	18,000 lbs.	Nylon	Tow strap, 2" wide by 30' long

## 2 INCH SPECIALTY MOUNTS

 Weight capacities limited to the lowest rated towing component

- Fits any 2" x 2" receiver tube opening
- Top receiver increases ground clearance for a cargo carrier or other hitch-mounted accessories
- Top receiver not for towing use
- Provides two receiver tubes for multiple accessories, such as a cargo carrier and a ball mount (#45792)
- Ideal for carrying a bike rack while towing a trailer (#45810)



45794



45792



45794 gives added ground clearance



45792 provides two receiver tubes



45810 provides a ball mount and receiver tube to tow a trailer and an additional accessory



45810

Part#	Description	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45794	Raised receiver adapter	Not for towing use / 350 lbs.	--	4 1/4"	5 1/4"	--	Gloss black
45792	Dual receiver extender with pin & clip	3,500 / 350 lbs.	--	5 13/16"	8"	--	Gloss black
45810	Multi-use ball mount with pin & clip	7,500 / 750 lbs.	2"	5 13/16"	12 1/4"	1"	Gloss black

## ATV

2 INCH

## ATV TOWING STARTER KITS

- Includes 3-in-1 ATV ball mount, bolt-on ATV adapter and pin & clip
- Never exceed the ATV's maximum tow rating
- Ball mount features a trailer ball, 5/8" hole and a clevis pin
- Adapter bolts onto ATV tongue to provide a 2" x 2" receiver tube
- Welded D-ring accepts tow straps or hooks
- Patent# 8,915,514 and 8,276,932



45029



Installs on ATV and provides a variety of hook-up options




45005



Clevis pin accepts hook or strap for straight-line pull



45006



No-swivel design



Converts an ATV platform into a 2" receiver tube

Pkg#	Ball Diameter	Rise	Length	Hole Size	Finish
<b>Starter Kits</b>					
45029	1 7/8"	1/4"	6"	5/8"	Gloss black
45038	2"	1/4"	6"	5/8"	Gloss black
<b>Ball Mounts</b>					
45005	1 7/8"	1/4"	6"	5/8"	Gloss black
45009	2"	1/4"	6"	5/8"	Gloss black
<b>Bolt-On Adapter</b>					
45006	--	--	--	--	Gloss black

1 1/4  
INCH

&

2  
INCH

# TRAILER HITCH RECEIVER TUBE EXTENDERS

- Provides added clearance for a trailer or hitch-mounted accessory
- Shank constructed from solid steel for optimum strength
- Protected by a durable powder coat finish



Part#	Extends	Shank Size	GTW / TW
45789	7"	1 1/4"	Not for towing use / 350 lbs.
45791	8"	2"	3,500 / 350 lbs.
45795	14"	2"	3,500 / 350 lbs.
45796	18"	2"	3,500 / 350 lbs.

## Measuring extenders and adapters

Length is measured between pin-holes, from center to center



1 1/4  
INCH

→

2  
INCH

←

2 1/2  
INCH

# TRAILER HITCH RECEIVER TUBE ADAPTERS

- Adapts a receiver tube opening to a different size
- #45048 can be cut down from 34" to 24" and has integrated safety chain loops and an electrical bracket
- Protected by a durable powder coat finish




Part#	Adapts From	Adapts To	GTW / TW	Weight Dist. GTW / TW	Length	Finish
45785	1 1/4"	2"	Not for towing use / 350 lbs.	--	6 1/4"	Gloss black
45790	1 1/4"	2"	Not for towing use / 350 lbs.	--	10"	Gloss black
45770	2"	1 1/4"	3,500 / 350 lbs.	--	4"	Gloss black
45775	2"	1 1/4"	3,500 / 350 lbs.	--	9 1/2"	Gloss black
45780	2"	1 1/4"	3,500 / 350 lbs.	--	15"	Gloss black
45013	Vertical 2"	Standard 2"	5,000 / 500 lbs.	--	4 1/4"	Gloss black
45048	2 1/2"	2"	4,500 / 450 lbs.	6,000 / 600 lbs.	34"	Gloss black
			6,000 / 600 lbs.	8,000 / 800 lbs.	24"	

**3** INCH → **2½** INCH → **2** INCH **REDUCER SLEEVES**

- #45405 reduces a 2 1/2" x 2 1/2" receiver tube opening to fit a 2" x 2" shank
- #45408 two-piece set reduces a 3" receiver tube opening to fit a 2 1/2" shank or 2" shank
- GTW and TW are limited to trailer hitch capacity

Part#	Reduces From	Reduces To	Length	Finish
45405	2 1/2"	2"	5 1/2"	Carbide
45408 <b>NEW</b>	3"	2 1/2"	6 1/4"	Carbide
	2 1/2"	2"		

**How to use a reducer sleeve**



**NEW**



45405



45408



45408 set

**REDUCER BUSHINGS**

- Reduces hole size, allowing use of trailer balls with smaller shank diameters

Bulk/#	Pkg#	Reduces From	Reduces To	Finish
21100	21101	1"	3/4"	Yellow zinc-plated
21200	21201	1 1/4"	1"	Yellow zinc-plated
21300	21301	1 3/8"	1 1/4"	Yellow zinc-plated



21100



21200



21300

21301

**BALL MOUNT TONGUE SLEEVE**

- Allows for single-wrench trailer ball torquing
- For use with CURT and other 'wrench flat' trailer balls
- See our trailer ball hex-end wrench on page 220
- Patent# 8,376,387

Pkg#	Fits	Hole Size	Finish
45007	2 1/2" tongue width	1"	Gloss black



45007

**TOW POUCH**

- Stores ball mount, trailer balls, hitch pins and other accessories
- Keeps hands and vehicle interior clean

Part#	Width	Length
22200	11 1/2"	17 1/2"



22200



# PINTLES & LUNETTE EYES

## FORGED PINTLE HOOKS & COMBINATIONS

For pintle mount options go to page 215

- Mounts on any CURT adjustable pintle mount
- Spring-loaded locking arm for secure coupling
- Constructed from solid, forged steel for superior strength
- Changeable trailer ball features a hard chrome finish
- Includes safety pin and bolt kit



48180



48190



48200



Pintle hook coupled to a lunette eye



Ball & pintle combo attached to coupler



48205



48210



48215




48230

Bulk#	Pkg#	Pintle GTW	Vertical Load	Ball GTW	Ball Diameter	Fits Lunette Eye	Finish
<b>Ball &amp; Pintle Combinations</b>							
--	48180	16,000 lbs.	1,600 lbs.	6,000 lbs.	1 7/8"	2 1/2" or 3" I.D.	Black
--	48190	16,000 lbs.	1,600 lbs.	10,000 lbs.	2"	2 1/2" or 3" I.D.	Black
--	48200	16,000 lbs.	1,600 lbs.	16,000 lbs.	2 5/16"	2 1/2" or 3" I.D.	Black
<b>Pintle Hooks</b>							
--	48205	10,000 lbs.	2,000 lbs.	--	--	2 1/2" or 3" I.D.	Black
--	48210	20,000 lbs.	4,000 lbs.	--	--	2 1/2" or 3" I.D.	Black
--	48215	30,000 lbs.	8,000 lbs.	--	--	2 1/2" or 3" I.D.	Black
--	48230*	60,000 lbs.	12,000 lbs.	--	--	2 1/2" or 3" I.D.	Black
<b>Replacement Bolt Kits</b>							
48330	-Four 12mm x 50mm hex bolts (class 10.9) -Four 12mm hex nuts (class 8) -Four 12mm lock washers						Yellow zinc-plated
48331*	-Four 12mm x 50mm socket head cap screws (class 12.9) -Four 12mm nylock hex nuts (class 8) -Four 12mm lock washers						Black oxide



48330



48331 - for part# 48230


\* Required for #48230 to reach 60,000 lbs. gross trailer weight

# 2 INCH & 2 1/2 INCH ADJUSTABLE PINTLE MOUNTS

- Mounts any CURT adjustable pintle hook or ball & pintle combination
- Height adjustment allows for precise trailer leveling
- Bent face plate and solid shank provide superior strength (#48343, #48339)
- 2 1/2" shank options ideal for class 5 Commercial Duty hitches (page 15)
- Protected by a highly durable carbide powder coat finish
- Protective cardboard sleeve and full-color retail label

## Measuring a pintle mount

See table for corresponding measurements

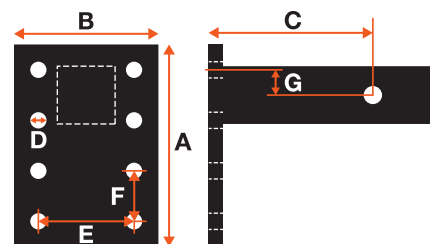

Part#	GTW	Pintle Positions	Plate Height (A)	Plate Width (B)	Shank Length (C)	Hole Size (D)	Hole Space (E)	Hole Space (F)	Top Hole Height (G)
<b>For 2" x 2" Receiver Tube Openings</b>									
48326	20,000 lbs.	1-position	3 1/2"	5"	6"	9/16"	3 5/16"	1 3/4"	7/8"
48327	20,000 lbs.	1-position	3 1/2"	5"	8"	9/16"	3 5/16"	1 3/4"	7/8"
48323	10,000 lbs.	3-position	7"	5"	6"	9/16"	3 5/16"	1 3/4"	7/8"
48324	10,000 lbs.	3-position	7"	5"	8"	9/16"	3 5/16"	1 3/4"	7/8"
48328	15,000 lbs.	3-position	7"	5"	6"	9/16"	3 5/16"	1 3/4"	7/8"
48325	15,000 lbs.	3-position	7"	5"	8"	9/16"	3 5/16"	1 3/4"	7/8"
48343	17,000 lbs.	3-position	7 1/4"	6 1/2"	6"	9/16"	3 5/16"	1 3/4"	7/8"
48341	10,000 lbs.	6-position	13"	5"	10"	9/16"	3 5/16"	1 3/4"	7/8"
48342	10,000 lbs.	6-position	13"	5"	12"	9/16"	3 5/16"	1 3/4"	7/8"
<b>For 2 1/2" x 2 1/2" Receiver Tube Openings</b>									
48340	20,000 lbs.	1-position	3 1/2"	5"	8"	9/16"	3 5/16"	1 3/4"	7/8"
48329	18,000 lbs.	3-position	7"	5"	8"	9/16"	3 5/16"	1 3/4"	7/8"
48339	20,000 lbs.	3-position	7 1/4"	6 1/2"	6 3/8"	9/16"	3 5/16"	1 3/4"	1 1/4"
<b>Replacement Bolt Kit</b>									
48330	-Four 12mm x 50mm hex bolts (class 10.9) -Four 12mm hex nuts (class 8) -Four 12mm lock washers								

**2** INCH & **2 1/2** INCH

# FORGED RECEIVER-MOUNT PINTLE HOOKS & COMBINATIONS

- Fits 2" or 2 1/2" receiver tube openings
- Spring-loaded locking arm for secure coupling
- Constructed from solid, forged steel for superior strength
- 2 1/2" shank ideal for class 5 Commercial Duty hitches (#48010, #48012)
- Protected by a durable powder coat finish
- Changeable trailer ball features a hard chrome finish
- Includes safety pin with chain or cable



Part#	GTW	Ball Capacity	Fits Receiver Tube Size	Ball Size	Overall Length	Ball Length	Hook Length	Fits Lunette Eye
<b>Receiver-Mount Ball &amp; Pintle Combinations</b>								
48006	16,000 lbs.	12,000 lbs.	2"	2 5/16"	15 1/4"	11 1/4"	9 1/2"	2 1/2" or 3" I.D.
48007	16,000 lbs.	10,000 lbs.	2"	2"	15 1/4"	11 1/4"	9 1/2"	2 1/2" or 3" I.D.
48012	20,000 lbs.	20,000 lbs.	2 1/2"	2 5/16"	15"	11"	9 1/2"	2 1/2" or 3" I.D.
<b>Receiver-Mount Pintle Hooks</b>								
48005	10,000 lbs.	--	2"	--	14 1/2"	--	9 1/2"	2 1/2" I.D.
48004	20,000 lbs.	--	2"	--	14 1/2"	--	9 1/2"	2 1/2" I.D.
48010	20,000 lbs.	--	2 1/2"	--	14 3/4"	--	9 1/2"	2 1/2" I.D.

## FORGED MOUNT-STYLE LUNETTE EYES

- Smooth back plate for flush mounting
- Four-bolt pattern for simple, secure attachment
- Constructed from forged steel alloy for superior strength



Pkg#	GTW	Eye Hole Size	Ring Thickness	Bolt Hole Spacing	Base Size	Finish
48550	35,000 lbs.	2 1/2" I.D.	1 1/2"	4 1/2" center to center	6" square	Black
48560	60,000 lbs.	3" I.D.	1 1/2"	4 1/2" center to center	6" square	Black

# FORGED LUNETTE EYES

- Single stud eliminates need for a swivel-type pintle hook
- Threaded shank and castle nut for secure attachment to trailer
- Flat design allows drawbar to bolt quickly and easily to a trailer tongue
- Constructed from forged steel alloy for superior strength



48520



48530



48510



Using pintle hook



Using clevis bar

Part#	GTW	Eye Hole Size	Bar Width	Bar Length	Bar Thickness	Finish	Description
48520	15,000 lbs.	2 1/2" I.D.	--	--	--	Black	Lunette eye with nut
48530	45,000 lbs.	3" I.D.	--	--	--	Black	Lunette eye with nut
48510	22,000 lbs.	3" I.D.	3"	13"	1 5/8"	Black	Lunette eye drawbar, seven-bolt

# CHANNELS & FORGED LUNETTE EYES

- Height adjustment allows for precise trailer leveling
- 2" bolt pattern spread for simple, secure attachment
- Constructed from forged steel for superior strength
- Channel brackets feature one-piece, formed steel construction



48601



48660



48610



48650



48630



48631



48640



48620

Bulk#	Pkg#	GTW	Number of Positions	Eye Hole Size	Bolt Hole Spacing	Channel Width	Channel Height	Description
48600	--	12,000 lbs.	--	3" I.D.	--	--	--	Forged lunette eye
48601	--	12,000 lbs.	--	3" I.D.	--	--	--	Forged lunette eye, black
48660	--	24,000 lbs.	--	3" I.D.	--	--	--	Forged lunette eye
48631	48630	12,000 lbs.	3-position	3" I.D.	2" on center	3 1/2" I.D.	7 1/2"	Forged lunette eye with channel
48610	--	--	3-position	--	2" on center	3 1/2" I.D.	7 1/2"	Formed channel
48650	--	--	5-position	--	2" on center	3 1/2" I.D.	11 3/4"	Formed channel
48640	--	12,000 lbs.	5-position	3" I.D.	2" on center	3 1/2" I.D.	11 3/4"	Forged lunette eye with channel
48620	Grade-8 bolt kit includes two of each of the following: hex bolts (5/8" x 5 1/2"), hex bolts (1/2" x 1 1/2"), nylock hex nuts (5/8"), flat washers (1/2") and flat washers (5/8")							



# TRAILER BALLS

- Chrome-plated, stainless steel or raw trailer balls available
- Fine threads provide superior holding strength
- Tested for safety to meet U.S. VESC specifications

## Stainless steel



40051  
Bulk tag



40081  
Packaged

## Chrome-plated



40090  
Bulk tag



40069  
Packaged


## Raw



40088  
Bulk tag

## Measuring a trailer ball

- A: Ball diameter  
B: Shank length  
C: Shank diameter  
D: Rise

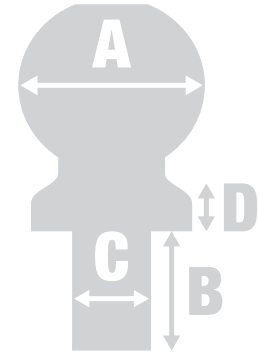

## Torque specs (lb. - ft.)

- 3/4" shank: 160  
1" shank: 250  
1 1/4" shank: 450  
2" shank: 4,550

Shank Diameter	Shank Length	Rise	GTW	Chrome Bulk#	Chrome Pkg#	Stainless Bulk#	Stainless Pkg#	Raw Bulk#
<b>1 7/8" Ball Diameter</b>								
3/4"	1 5/8"	0"	2,000 lbs.	40001	40061	--	--	--
3/4"	2 1/8"	0"	2,000 lbs.	40015	40063	40050	40080	--
3/4"	3"	0"	2,000 lbs.	40016	40071	--	--	--
1"	2 1/8"	0"	3,500 lbs.	40002	40062	40051	40081	--
1"	2 1/8"	2"	3,500 lbs.	40032	--	--	--	--
1"	2 3/16"	1"	3,500 lbs.	40031	--	--	--	--
1"	3"	0"	3,500 lbs.	40017	40072	--	--	--
<b>2" Ball Diameter</b>								
3/4"	1 3/4"	0"	3,500 lbs.	40003	40064	--	--	--
3/4"	2 1/8"	0"	3,500 lbs.	40018	40065	40052	40082	--
3/4"	3"	0"	3,500 lbs.	40019	40073	--	--	--
1"	2 1/8"	0"	6,000 lbs.	40004	40066	40053	40083	--
1"	2 1/8"	0"	7,500 lbs.	40037	--	--	--	--
1"	2 1/8"	1"	6,000 lbs.	40033	--	--	--	--
1"	2 1/8"	2"	6,000 lbs.	40034	--	--	--	--
1"	2 1/4"	0"	12,000 lbs.	40038*	--	--	--	--
1"	3"	0"	6,000 lbs.	40020	40074	--	--	--
1 1/4"	2 5/8"	0"	10,000 lbs.	40090	40069	--	--	--
<b>2 5/16" Ball Diameter</b>								
1"	2 1/8"	0"	7,500 lbs.	40005	40067	40054	40084	--
1"	2 1/4"	0"	10,000 lbs.	40007	--	--	--	--
1"	2 1/4"	0"	12,000 lbs.	40039*	--	--	--	40042*
1"	3"	0"	6,000 lbs.	40021	40075	--	--	--
1 1/4"	2 5/8"	0"	10,000 lbs.	40006	40068	--	--	--
1 1/4"	2 5/8"	0"	15,000 lbs.	40030*	--	--	--	--
1 1/4"	2 3/4"	0"	20,000 lbs.	40008*	--	--	--	--
1 1/4"	2 5/8"	0"	30,000 lbs.	--	--	--	--	40085*
1 1/4"	2 5/8"	1"	10,000 lbs.	40035	--	--	--	--
1 1/4"	2 5/8"	1"	25,000 lbs.	--	--	--	--	40086*
1 1/4"	2 5/8"	2"	10,000 lbs.	40036	--	--	--	--
1 1/4"	2 5/8"	2"	25,000 lbs.	--	--	--	--	40087*
1 1/4"	3"	0"	6,000 lbs.	40022	40076	--	--	--
2"	3 1/2"	0"	30,000 lbs.	--	--	--	--	40088**
<b>3" Ball Diameter</b>								
2"	3 1/2"	0"	30,000 lbs.	--	--	--	--	40089**


\*Heat-treated

\*\*Heat-treated, coarse-threaded


# SWITCH BALL™ TRAILER BALLS

- Exclusive 'J' groove design for secure attachment to the shank
- No tools, coins or pins required for trailer ball install or removal
- Shank bears the weight, freeing the coupler from binding
- Built from high-strength steel
- Protected by a premium grade, nickel chrome-plated finish
- Neck covers protect the Switch Ball™ neck from the elements when not in use
- Tested for safety in accordance with SAE J684
- U.S. patent# 5,169,168; Canadian patent# 1,325,445

## Features



## Measuring a Switch Ball™

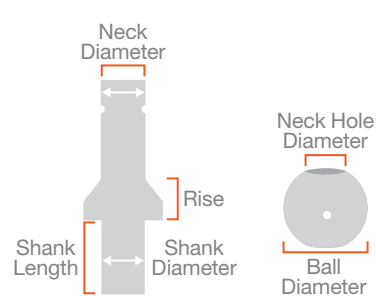

Place the ball on the shank



Twist the ball down onto the shank to lock



Bulk#	Pkg#	Ball Diameter and GTW			Shank GTW	Shank Length	Shank Diameter	Neck Diameter	Neck Hole Diameter	Rise	Finish
		1 7/8"	2"	2 5/16"							
<b>Switch Ball™ Trailer Ball Sets</b>											
--	42178	3,500 lbs.	6,000 lbs.	--	--	2 1/4"	1"	1"	--	0"	Chrome-plated
--	42225	3,500 lbs.	6,000 lbs.	8,000 lbs.	--	2 1/4"	1"	1 1/8"	--	3/4"	Chrome-plated
--	42280	--	6,000 lbs.	8,000 lbs.	--	2 1/4"	1"	1 1/8"	--	3/4"	Chrome-plated
-	41782	3,500 lbs.	6,000 lbs.	--	--	1 5/8"	3/4"	1"	--	0"	Chrome-plated
--	41783	3,500 lbs.	6,000 lbs.	--	--	2 1/4"	3/4"	1"	--	0"	Chrome-plated
<b>Switch Ball™ Neck Covers</b>											
--	41352	--	--	--	--	--	--	1"	--	--	Black rubber
--	41353	--	--	--	--	--	--	1"	--	--	Red rubber
--	41354	--	--	--	--	--	--	1 1/8"	--	--	Black rubber
--	41355	--	--	--	--	--	--	1 1/8"	--	--	Red rubber
<b>Replacement Trailer Balls</b>											
41780	--	6,000 lbs.	--	--	--	--	--	--	1"	--	Chrome-plated
42780	--	8,000 lbs.	--	--	--	--	--	--	1 1/8"	--	Chrome-plated
41200	--	--	6,000 lbs.	--	--	--	--	--	1"	--	Chrome-plated
42200	--	--	8,000 lbs.	--	--	--	--	--	1 1/8"	--	Chrome-plated
42203	--	--	--	8,000 lbs.	--	--	--	--	1 1/8"	--	Chrome-plated
<b>Replacement Shanks</b>											
41340	--	--	--	--	3,500 lbs.	1 5/8"	3/4"	1"	--	0"	Chrome-plated
41341	--	--	--	--	3,500 lbs.	2 1/4"	3/4"	1"	--	0"	Chrome-plated
42100	--	--	--	--	6,000 lbs.	2 1/4"	1"	1"	--	0"	Chrome-plated

# TRAILER BALL COVERS

- Protects trailer ball when not in use

Bulk#	Pkg#	Finish	Fits
21800	21801	Black rubber	1 7/8" and 2" trailer balls
21810	21811	Black rubber	2 5/16" trailer balls



# REPLACEMENT NUTS & WASHERS

- Fits trailer ball shanks with fine threads
- Helical lock washer ensures a secure mount
- Constructed from zinc-plated steel
- Tested for safety to meet U.S. VESC V-5 specifications



Pkg#	Torque Specification	Description
40103	160 ft. lbs.	3/4" nut and lock washer
40104	250 ft. lbs.	1" nut and lock washer
40105	450 ft. lbs.	1 1/4" nut and lock washer

# TRAILER BALL BOX-END WRENCH

- Six-point design ensures the best grip and protects against rounding of the nut
- Forged, hardened steel construction with a durable chrome plating



Part#	Length	Wrench Sizes	Fits
20001	15 1/2"	1 1/8" and 1 1/2"	3/4" and 1" shanks

# REPLACEMENT PINTLE BALLS

- Fits lunette eyes with a 2 1/2" or 3" inside diameter
- Fine threads and self-securing nylock nut provide secure mounting
- Constructed from high-strength, drop-forged steel
- Protected by a hard chrome-plated finish



Bulk#	Ball Diameter	Shank Diameter	GTW
48810	1 7/8"	1 1/4"	6,000 lbs.
48820	2"	1 1/4"	10,000 lbs.
48830	2 5/16"	1 1/4"	12,000 lbs.

# REPLACEMENT SWAY CONTROL BALL

- Fits the sway control unit #17200, sway tab ball mount #45820 or weld-on sway tab #45822
- Sway control helps reduce lateral trailer movement
- Constructed from zinc-plated steel



Bulk#	Ball Diameter	Shank Diameter	Shank Length
40093	1 1/4"	5/8"	1 3/4"

# DOUBLE LOCK GOOSENECK BALLS

- Trailer balls fit all original Double Lock gooseneck hitches
- #60616 also fits Double Lock EZr™ gooseneck hitches



60616



60602



60603

Bulk#	Pkg#	Description	Ball Size	Ball Rise	Ball Offset	GTW / Vertical Load
60616	--	Replacement ball for EZr™ and Double Lock goosenecks	2 5/16"	--	--	30,000 / 7,500 lbs.
--	60602	Moves pivot point rearward for added cab clearance	2 5/16"	--	4"	20,000 / 5,000 lbs.
--	60603	Adds clearance for trucks with plastic or rubber bed liners	2 5/16"	1"	--	30,000 / 7,500 lbs.

# REPLACEMENT OEM PUCK SYSTEM GOOSENECK BALLS

- Requires OEM puck system to install into the vehicle
- Installs easily with quarter-turn latch locking system
- Retention balls keep shank fully locked into the hitch
- Constructed from strong, machine-forged steel alloy
- Protected by a polished chrome-plated mirror finish
- Tested for safety to meet U.S. VESC V-19 specifications
- Patent# 8,955,866



60601 factory-style gooseneck ball operates with a simple, 1/4-turn latch-locking system



60601

60629

Part#	Make	Ball Size	Description	Finish	GTW / Vertical Load
60601	Ford and Ram	2 5/16"	OEM-compatible gooseneck ball	Chrome-plated	30,000 / 7,500 lbs.
60629	Chevrolet / GMC, Ford and Nissan	2 5/16"	OEM-compatible gooseneck ball	Chrome-plated	30,000 / 7,500 lbs.

# WELD-ON GOOSENECK BALL

- Constructed from high-strength, ready-to-weld steel alloy
- Heat-treated for optimum strength and durability
- Tested for safety to meet U.S. VESC V-5 specifications



40094

Part#	Ball Size	GTW	Fits
40094	2 5/16"	30,000 lbs	2 5/16" gooseneck couplers



# TOWING SECURITY

## HITCH & COUPLER LOCK SETS

- Locks keyed alike for convenient one-key operation
- Easy-to-operate, 1/4-turn lock activation
- Watertight dust caps prevent internal corrosion
- Four keys included for added convenience
- Space-saving, retail packaging



Pkg#	Fits Receiver Tube Opening	Fits Latch Span	Fits Coupler	Lock Pin Diameter	Coupler Pin Diameter	Finish	Description
23526	2" x 2"	7/8"	--	5/8"	1/4"	Chrome-plated	Hitch lock (23515) & coupler lock (23520)
23527	2" x 2"	2 1/2"	--	5/8"	1/4"	Chrome-plated	Hitch lock (23515) & coupler lock (23522)
23505	2" x 2"	Adjustable from 1" to 3"	--	5/8"	1/4"	Chrome-plated	Hitch lock & coupler lock (23503)
23086	2" x 2"	Adjustable from 1/2" to 2 1/2"	1 7/8" & 2" flat lip couplers	5/8"	1/4"	Chrome-plated (hitch & coupler lock) Grey powder coat (trailer coupler lock)	Hitch lock, coupler lock & trailer coupler lock (23079)
23088	2" x 2"	Adjustable from 1/2" to 2 1/2"	2" & 2 1/2" flat lip couplers	5/8"	1/4"	Chrome-plated (hitch & coupler lock) Grey powder coat (trailer coupler lock)	Hitch lock, coupler lock & trailer coupler lock (23081)


# HITCH LOCKS

- Easy-to-operate, 1/4-turn lock activation
- Watertight dust cap prevents internal corrosion
- Two keys included for added convenience
- Space-saving, full-color retail packaging



Pkg#	Fits Receiver Tube Opening	Pin Diameter	Finish	Lock Style
23020	1 1/4" x 1 1/4"	1/2"	Chrome-plated	Dead bolt
23501	1 1/4" x 1 1/4"	1/2"	Chrome-plated	Barbell
23024	1 1/4" x 1 1/4"	1/2"	Chrome-plated	Dead bolt with adapter sleeve
	2" x 2"	5/8"		
23517	1 1/4" x 1 1/4"	1/2"	Stainless steel	Barbell with adapter sleeve
	2" x 2"	5/8"		
23506	1 1/4" x 1 1/4"	1/2"	Chrome-plated	Barbell, right angle with adapter sleeve
	2" x 2"	5/8"		
23515	2" x 2"	5/8"	Chrome-plated	Barbell
23530*	2" x 2"	5/8"	Chrome-plated	Barbell with anti-rattle
23516	2" x 2"	5/8"	Stainless steel	Barbell
23518	2" x 2"	5/8"	Black	Barbell
23502	2" x 2"	5/8"	Stainless steel with blue anodized aluminum	Barbell, right angle
23510	2" x 2"	5/8"	Chrome-plated	Barbell, right angle
23021	2" x 2"	5/8"	Chrome-plated	Dead bolt
	2 1/2" x 2 1/2"			
23528	2" x 2"	5/8"	Chrome-plated	Barbell
	2 1/2" x 2 1/2"			
23519	2" x 2"	5/8"	Stainless steel	Barbell
	2 1/2" x 2 1/2"			
23504	2" x 2"	5/8"	Chrome-plated	Barbell, right angle
	2 1/2" x 2 1/2"			

\* Continued while supplies last



23530 assembled in trailer hitch receiver tube

# COUPLER LATCH LOCKS

- Easy-to-operate, 1/4-turn lock activation
- Watertight dust cap prevents internal corrosion
- Two keys included for added convenience
- Space-saving, full-color retail packaging



Pkg#	Fits Latch Span	Pin Diameter	Finish	Lock Style
23546	3/4"	1/4"	Solid brass	Padlock
23022	3/4"	1/4"	Brass-plated	Padlock
23521	3/4"	1/4"	Black	Padlock
23520	7/8"	1/4"	Chrome-plated	Barbell
23522	2 1/2"	1/4"	Chrome-plated	Barbell
23523	3 3/8"	1/4"	Chrome-plated	Barbell
23503	Adjustable from 1" to 3"	1/4"	Chrome with blue anodized aluminum	Barbell, right angle



23503 coupler lock shown in trailer coupler

# TRAILER COUPLER LOCKS

- Designed to deter trailer theft by preventing a trailer ball from being inserted into the coupler
- Two keys included for added convenience



Two different designs fit multiple coupler sizes to secure unattended trailers



Pkg#	Fits	Finish	Description
23079	1 7/8" and 2" couplers	Grey powder coat	Aluminum lock for flat lip couplers
23081	2" and 2 5/16" couplers	Grey powder coat	Aluminum lock for flat lip couplers
23659	Universal	Hammer-tone epoxy	Die-cast trailer lock with dual-ratchet locking system
23179	Universal	Ballistic grade nylon	Solid, hardened steel trailer lock with dual-ratchet locking system

## 5TH WHEEL HITCH LOCK

- Locks a 5th wheel hitch into the rails, taking the place of a pin & clip
- Extra-long 1/2" diameter pin fits all industry-standard base rails
- Rust-free aluminum housing with a durable black powder coat finish
- Weather-resistant dust cap helps prevent internal corrosion
- Easy-to-operate, 1/8-turn lock activation
- Includes two keys for added convenience

**NEW**



Locks a 5th wheel to industry-standard rails



23256

Pkg#	Pin Diameter	Finish
23256 <b>NEW</b>	1/2"	Black powder-coated aluminum

## KINGPIN LOCK

- Locks on to 5th wheel kingpin to deter theft of 5th wheel trailer
- Universal design fits most 5th wheel trailer kingpins
- Built with an aluminum body for excellent corrosion resistance
- Two keys included for added convenience
- Space-saving, full-color retail packaging



23255 on kingpin



23255

Pkg#	Description	Finish
23255	5th wheel trailer kingpin lock	Chrome-plated

## MULTI-USE CABLE LOCK

- Secures bike racks, cargo and other belongings to deter theft
- Features versatile locking and cinching capabilities
- 6' length allows for great use as a bike lock
- Constructed from 3/8" high-strength braided steel cable
- Protected by a vinyl coating for rust resistance
- Two keys included for added convenience



23666 on bike frame



23666

Pkg#	Length	Cable	Finish
23666	6'	3/8" diameter	Vinyl-coated, braided steel

## SPARE TIRE LOCK

- Secures spare tires to prevent theft
- Protected by a durable chrome-plated finish
- Two keys included for added convenience



23562 exploded



23562

Pkg#	Fits	Finish
23562	Side-mount spare tires	Chrome-plated



# WHEEL CHOCK LOCK

- Secures unattended trailers, RVs or vehicles by clamping onto the wheel
- Chocks and locks the wheel to prevent roll-away
- Expandable width fits most tire sizes
- Red rubber-coated arms protect the wheel's finish
- Three keys included for added convenience

Pkg#	Fits Tire Sizes		Finish
23175	4.8" - R12	215 / 70R15	Yellow powder coat with red rubber-coated arms
	7.5" - R16	225 / 75R15	
	195 / 75R14	235 / 75R15	
	205 / 60R16	235 / 80R16	
	205 / 70R15	33" x 12.5" - R15	



23175 in use



23175

# WHEEL CHOCK SET

- Ideal for chocking wheels on a parked trailer
- Perfect for adding safety during vehicle maintenance
- Raised tread offers a better grip on the wheel
- Saw-tooth edges on the base provide solid traction on the ground
- Always to be used with vehicle brake
- Not for commercial use

Part#	Description
22800	For use with wheels up to 17" wide



22800 in use




22800

# ANTI-RATTLE HITCH PINS

- Stops rattling and prevents swaying of load when using a hollow shank
- Compatible with CURT cargo carriers and other hollow-shank accessories
- Threaded pin allows bracket to be tightly installed

Pkg#	Fits Receiver Tube Opening	Finish
22315	1 1/4" x 1 1/4"	Yellow zinc-plated
22321	2" x 2"	Yellow zinc-plated



22321 in use



22315

22321

# HITCH PINS & CLIPS

- Secures ball mounts and other receiver tube inserts
- Bent handle for an easier grip



Bulk#	Pkg#	Three-Pack#	Fits Receiver Tube Opening	Pin Diameter	Finish	Clip Attachment
21400	21401	--	1 1/4" x 1 1/4"	1/2"	Zinc-plated	Hole
21403	21404	--	1 1/4" x 1 1/4"	1/2"	Zinc-plated	Groove
21410	21411	--	1 1/4" x 1 1/4"	1/2"	Zinc-plated, coated grip	Hole
--	21502	--	1 1/4" x 1 1/4"	1/2"	Zinc-plated	Hole
			2" x 2"	5/8" adapter		
21500	21501	--	2" x 2"	5/8"	Zinc-plated	Hole
21504	21505	--	2" x 2"	5/8"	Zinc-plated	Groove
21510	21511	--	2" x 2"	5/8"	Zinc-plated, coated grip	Hole
21578	21579	--	2" x 2"	5/8"	Black zinc-plated	Hole
21580	21581	--	2" x 2"	5/8"	Zinc-plated	Hole
			2 1/2" x 2 1/2"			
21582	21583	--	2" x 2"	5/8"	Zinc-plated	Groove
			2 1/2" x 2 1/2"			
21507 <b>NEW</b>	21506 <b>NEW</b>	--	2 1/2" x 2 1/2"	5/8"	Zinc-plated	Groove
			3" x 3"			
21600	21601	21602	--	Fits 1/2" or 5/8"	Zinc-plated	--

# SWIVEL HITCH PINS

- Quickly secures ball mounts and other receiver tube inserts with no clip needed
- Permanently attached swivel clip cannot be lost
- Bent handle for an easier grip



Pkg#	Fits Receiver Tube Opening	Pin Diameter	Finish	Description
21541	1 1/4" x 1 1/4"	1/2"	Chrome-plated	Swivel pin
23581	1 1/4" x 1 1/4"	1/2"	Stainless steel	Swivel pin
21551	2" x 2"	5/8"	Chrome-plated	Swivel pin
23582	2" x 2"	5/8"	Stainless steel	Swivel pin
21561	1 1/4" x 1 1/4"	1/2"	Zinc-plated	Swivel pin with adapter sleeve
	2" x 2"	5/8"		

# SAFETY PINS

- Quickly secures coupler latches, pintle hooks, jack legs or caster wheels
- Square retainer wire clip provides added clearance
- Protected by a durable zinc-plated finish



Bulk#	Pkg#	Pin Diameter	Pin Length	Chain Length
25080	25081	1/4"	2 3/4"	--
25012	25013	1/4"	2 3/4"	12"
25010	25011	5/16"	3"	--
25034	25035	5/16"	3"	12"
28278	28279	3/8"	2 3/4"	--
28000	28001	3/8"	3"	12"



Securing a coupler latch (25034)



Securing a jack foot (28278)

# FAB COMPONENTS



## RAW STEEL RECEIVER TUBING

- Raw finish allows for immediate welding
- 1/2" reinforcing collar for increased strength
- Features a pre-drilled hitch pin hole



Part#	Finish	Receiver Tube Opening	Tube Length
49506	Raw	1 1/4" x 1 1/4"	6"
49512	Raw	1 1/4" x 1 1/4"	12"
49524	Raw	1 1/4" x 1 1/4"	24"
49060	Raw	2" x 2"	6"
49090	Raw	2" x 2"	9"
49120	Raw	2" x 2"	12"
49180	Raw	2" x 2"	18"
49240	Raw	2" x 2"	24"
49360	Raw	2" x 2"	36"
49480	Raw	2" x 2"	48"
49510	Raw	2 1/2" x 2 1/2"	10"



## 2 INCH RAW STEEL HITCH BARS

- Raw finish allows for immediate welding
- Rounded corners for easier insertion into the receiver
- Constructed from high-strength, hot-rolled steel
- Features a pre-drilled hitch pin hole



Part#	Finish	Bar Length	Description
49537	Raw	8"	Solid steel square bar
49529	Raw	10"	Solid steel square bar
49530	Raw	12"	Solid steel square bar
49531	Raw	14"	Solid steel square bar
49532	Raw	16"	Solid steel square bar
49533	Raw	18"	Solid steel square bar
49534	Raw	20"	Solid steel square bar
49535	Raw	22"	Solid steel square bar
49536	Raw	24"	Solid steel square bar



## 2 INCH HITCH BOX

- Raw finish for immediate welding
- Pre-drilled hitch pin hole
- High-strength steel



Part#	GTW / TW	Receiver Tube Size	Finish
49717	5,000 / 500 lbs.	2" x 2"	Raw



## 2 INCH REINFORCEMENT COLLAR

- Strengthens receiver tube opening
- Raw finish for immediate welding
- High-strength steel



Part#	Receiver Tube Size	Finish
49770	2" x 2"	Raw



## STAKE POCKET

- Adds a tie-down for straps and chains
- Accepts 2x4 studs
- Raw finish for immediate welding



Part#	Inside Width	Inside Depth	Finish
83072	3 1/2"	1 5/8"	Raw

## SAFETY CHAIN LOOP

- Provides a safety chain attachment point
- Raw finish for immediate welding



Part#	Capacity	Finish
49950	10,000 lbs.	Raw



# HITCH ACCESSORIES

## 2 INCH FRONT MOUNT ACCESSORIES

- Fits any 2" x 2" receiver tube opening
- Designed for use with front mount hitches
- Can also be used with rear mount hitches when not towing a trailer
- Also see cargo carriers on pages 346 and 347



Part#	Description
31006	Spare tire mount (mounting hardware not included)
31001	Step pad with anti-skid surface
31002	License plate holder
31007	Skid shield
31010	Winch mount
31005	Winch mount handles
31009	Winch mount with handles



Step pad provides easy under the hood access (31001)



Provides protection for the front end and hitch (31007)



Allows a winch to be easily attached to a receiver (31009)



24" height accepts multiple tire sizes (31006)

## FISH WIRE

- Makes it easier to lead bolts through tough-to-reach holes
- Ideal for installing a trailer hitch on a vehicle with a hollow frame
- Coiled end accepts threaded bolts
- Constructed from spring steel for versatile twisting and bending
- Includes one per poly bag



Part#	Length	Coil Diameter	Material
58390	18"	3/8"	Spring steel
58410	18"	7/16"	Spring steel
58400	18"	1/2"	Spring steel
58430	18"	5/8"	Spring steel

## PROFESSIONAL FINISHING PACK

- Great for hitch and wiring installations
- Features 11 commonly used automotive trim panel retainers and frame hole plugs
- Contains 50 total pieces in a poly bag



Pkg#	Description
22322	50 automotive finishing pieces

# 1 1/4" & 2" & 2 1/2" RUBBER HITCH TUBE COVERS

- Protects 1 1/4", 2" or 2 1/2" receiver tube opening when not in use
- Adds a clean, finished look and keeps debris out
- Friction fit does not require a pin & clip to hold in place
- Features a convenient holder to mount a 4-way flat connector (#21728)



21728 in use



21728

Bulk#	Pkg#	Fits Receiver Tube Size	Finish
<b>Rubber Hitch Tube Covers</b>			
22271	22275	1 1/4" x 1 1/4"	Black rubber
22272	22276	2" x 2"	Black rubber
22277	22278	2 1/2" x 2 1/2"	Black rubber
<b>Hitch Tube Cover with 4-Way Flat Holder</b>			
--	21728	2" x 2"	Black rubber



22271 friction fit



22275



22276



22278

# 1 1/4" & 2" HITCH TUBE COVERS

- Protects 1 1/4" or 2" receiver tube opening when not in use
- Adds a clean, finished look and keeps debris out
- Constructed from high-strength steel (select models)
- Made from plastic to be completely rust-free (select models)
- Securely mounts using a pin and clip (not included)



22750 in use



21900



21901



22101



22111



22751

Bulk#	Pkg#	Fits Receiver Tube Size	Finish
<b>Steel Hitch Tube Covers</b>			
21900	21901	1 1/4" x 1 1/4"	Chrome-plated
22100	22101	2" x 2"	Chrome-plated
22110	22111	2" x 2"	Chrome-plated
22750	22751	2" x 2"	Black
<b>Plastic Hitch Tube Covers</b>			
22170	22171	2" x 2"	Chrome-plated
22180	22181	2" x 2"	Black



22171



22181

# RV TOWING



2  
INCH

## ADJUSTABLE RV TRAILER HITCHES

- Three-piece, adjustable design fits multiple frame sizes
- Designed for towing a trailer or small vehicle behind an RV



13701



13702



13703

Part#	GTW / TW	WD / WDTW	Fits Frames	Drop
13701	5,000 / 500 lbs.	6,000 / 600 lbs.	Up to 51" wide	2"
13702	5,000 / 500 lbs.	6,000 / 600 lbs.	Up to 51" wide	--
13703	3,500 / 350 lbs.	--	Up to 72" wide	--



## ADJUSTABLE TOW BAR

- Ideal for dingy towing a small vehicle behind an RV
- Adjusts in width from 26" to 41"
- Features a 2" heavy-duty coupler
- Lightweight design only weighs 31 lbs.
- Brackets bolt to the towed vehicle's bumper
- Universal bumper brackets and mounting hardware included



19745



19746



21500



19748



Tow bars adjust to fit different vehicles

Bulk#	Pkg#	Capacity	Ball Diameter	Finish	Dimensions	Description
--	19745	5,000 lbs.	2"	Gloss black	Adjusts from 26" to 41" in width	Adjustable tow bar
19746	--	--	--	Zinc-plated	1/2" diameter / 3" length	Replacement safety pin (new style)
21500	21501	--	--	Zinc-plated	5/8" diameter	Replacement pin & clip (old style)
19748	--	--	--	Gloss black	--	Bumper brackets



## RV HARNESSSES

- Connects a towed vehicle to an RV using a standard 4-way flat trailer plug
- Simple plug-and-play design eliminates the need for cutting or splicing
- Integrated block diodes isolate sensitive vehicle electronics from RV signals
- Uses towed vehicle's existing taillights, brake lights and turn signals
- Includes harness, 4-flat extension, mounting bracket and hardware
- See page 252 for application guide

NEW



58901

58902



## TOWING LIGHTS

- Easily adds tow lights to a vehicle being dinghy towed
- Non-scratch magnetic base protects vehicle finish
- Perfect for boats, RVs and flat towing applications
- 20' cord with 4-way flat plug allows for plug-and-play convenience
- Snap locks included for simple, secure splice-in connection
- Patent# D355,270



53204

53200

Bulk#	Pkg#	Length	Plug	Description
53200	53204*	20'	4-way flat	Auxiliary towing lights

\* Includes a sturdy, reusable case

## EXTENDED VIEW TOW MIRROR

- Attaches to side mirror to expand view with a trailer
- Compatible with pickup or SUV left or right side mirror
- Fully adjustable design can be used in horizontal or vertical position
- Articulating head allows precise angling
- Hinging arm and elastic straps provide easy and secure installation



20002

Pkg#	Mirror Dimensions	Description
20002	Extends from 5" to 7 1/2"	Tow mirror for trucks and SUVs