



# TRAILER PARTS & ACCESSORIES

## WHERE SAFETY MEETS FREEDOM

From tongue to back, CURT has everything your customers need to keep their trailer towing in optimal condition. We offer jacks, safety chains and couplers in a variety of styles and capacities to accommodate virtually any type of trailer – everything from utility haulers and popup campers to horse trailers and 5th wheel RVs. We also offer a number of accessories to fully equip your customers for the road ahead, including hand winches, wheel bearings, snap hooks and wheel chocks.

# FEATURED PRODUCTS



**Channel-mount couplers**  
 Mounted on a CURT channel, channel-mount couplers make it easy to adjust the tongue height of a trailer and level the load.



**Marine jacks**  
 Ideal for boat trailers and other watercraft haulers, marine jacks are water-resistant and have a wheel for convenient mobility.



**Safety cables**  
 Safety cables feature the strength of our safety chains with the added convenience of a coiled design to avoid dragging on the ground.

# PRODUCT INDEX



**328**  
 Couplers  
 & Repair Kits



**330**  
 Jacks &  
 Accessories



**333**  
 Safety Chains  
 & Cables



**336**  
 Hooks  
 & Latches



**339**  
 Hand Winches  
 & Straps



**340**  
 Wheel Bearing  
 Components



**341**  
 Cargo  
 Straps



**342**  
 Rings & Tie-  
 Down Anchors




# STRAIGHT-TONGUE & A-FRAME COUPLERS

- Sleeve-lock latch system for optimum security
- Spring and nut posi-lock mechanism allows for easy adjustment
- Features holes to accept a safety pin or coupler lock
- Constructed from punched, die-cut steel
- Protected by a durable zinc-plated or gloss black powder coat finish
- Tested for safety in accordance with SAE-J684
- Three-year limited warranty



Part#	Class	GTW / TW	Ball Diameter	Latch Style	Channel Width	Finish
<b>Straight-Tongue Couplers</b>						
25105	1	2,000 / 200 lbs.	1 7/8"	Posi-lock	2 1/2"	Zinc-plated
25128	1	2,000 / 200 lbs.	1 7/8"	Posi-lock	2"	Zinc-plated
25131	1	2,000 / 200 lbs.	1 7/8"	Posi-lock	3"	Zinc-plated
25153	2	3,500 / 500 lbs.	2"	Posi-lock	2"	Zinc-plated
25135	2	3,500 / 500 lbs.	2"	Posi-lock	2 1/2"	Zinc-plated
25138	2	3,500 / 500 lbs.	2"	Posi-lock	3"	Zinc-plated
25100	3	5,000 / 700 lbs.	2"	Posi-lock	3"	Zinc-plated
<b>A-Frame Couplers</b>						
25101	3	5,000 / 700 lbs.	2"	Posi-lock	--	Zinc-plated
25210	3	5,000 / 700 lbs.	2"	Posi-lock	--	Gloss black
25217*	4	7,000 / 1,050 lbs.	2"	Sleeve-lock	--	Gloss black
25200	4	10,000 / 1,500 lbs.	2 5/16"	Easy-lock	--	Gloss black
25227*	4	12,500 / 1,875 lbs.	2 5/16"	Sleeve-lock	--	Gloss black
<b>Replacement Part for #25101 and #25210 A-Frame Couplers</b>						
25294	3	5,000 / 700 lbs.	2"	Posi-lock	--	Zinc-plated
<b>Replacement Parts for Straight-Tongue Couplers</b>						
25094	1	2,000 / 200 lbs.	1 7/8"	Posi-lock	--	Zinc-plated
25194	2	3,500 / 500 lbs.	2"	Posi-lock	--	Zinc-plated

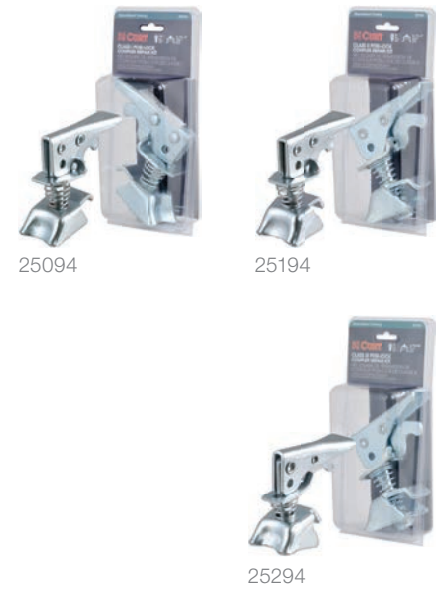

\*Solid neck for increased strength and greater corrosion resistance

# CHANNEL-MOUNT COUPLERS

- Compatible with CURT channels #48610 and #48650
- Secured by a dual-bolt mounting system
- Channel-mount allows for easy height adjustment
- Safety pin hole can also accept a coupler lock
- Constructed from heavy-duty cast steel
- Protected by a durable black powder coat finish
- **Three-year limited warranty**



Part#	GTW / TW	Ball Diameter	Description
25319*	7,000 / 1,050 lbs.	2"	Sleeve-lock coupler
25329*	12,500 / 1,875 lbs.	2 5/16"	Sleeve-lock coupler
25330	14,000 / 2,100 lbs.	2 5/16"	Easy-lock coupler
25328	15,000 / 2,250 lbs.	2 5/16"	Easy-lock coupler
25388	--	--	Bolt kit includes: -Two 5/8" x 4 3/4" hex bolts (grade 8) -Two 5/8" nylock hex nuts (grade 5) -Four 5/8" flat washers (grade 5)

\*Solid neck for increased strength and greater corrosion resistance

# SAFETY PINS

- Quickly secures coupler latches, pintle hooks, jack legs or caster wheels
- Square retainer wire clip provides added clearance
- Protected by a durable zinc-plated finish



Bulk#	Pkg#	Pin Diameter	Pin Length	Chain Length
25080	25081	1/4"	2 3/4"	--
25012	25013	1/4"	2 3/4"	12" chain
25010	25011	5/16"	3"	--
25034	25035	5/16"	3"	12" chain
28278	28279	3/8"	2 3/4"	--
28000	28001	3/8"	3"	12" chain



#25034 securing a coupler latch



#28278 securing a jack foot

# MARINE JACKS

- Caster wheel for trailer mobility and coupling
- Side-wind handle raises or lowers trailer coupler
- Swivel bracket allows jack to fully swing up and out of the way for travel
- Heavy-duty pull-pin locks jack securely in place
- Bolt-on hardware included for secure mounting
- Protected by a durable zinc-plated finish
- See page 332 for repair parts and accessories



28100



28101

Bulk#	Pkg#	Capacity	Wind	Travel	Bracket Height	Wheel Size	Finish
28100	28101	1,000 lbs.	Side	10"	12 11/16"	6"	Zinc-plated
28112	28113	1,200 lbs.	Side	10"	12 11/16"	6"	Zinc-plated
28115	28116	1,500 lbs.	Side	10"	12 11/16"	8"	Zinc-plated
28155	28156	1,500 lbs.	Side	10"	12 1/2"	Dual 6"	Zinc-plated

# A-FRAME JACKS

- Designed to be mounted on an A-frame trailer tongue
- Can bolted or welded on (hardware not included)
- See page 332 for repair parts and accessories



28204  
side-wind



28255  
top-wind



28203  
top-wind

Bulk#	Pkg#	Capacity	Wind	Travel	Bracket Height	Handle Type	Tube Size
28200	--	2,000 lbs.	Top	14"	8"	Straight	2"
28202	28203	2,000 lbs.	Top	15"	9"	Straight	2"
28204	--	2,000 lbs.	Side	14 1/2"	9"	Straight	2"
28250	--	5,000 lbs.	Top	14"	10 1/2"	Straight	2"
28255	--	5,000 lbs.	Top	15"	10 1/2"	Claw	2"

# SWIVEL JACKS

- Swivel bracket allows jack to fully swing up and out of the way during travel
- Pull-pin keeps jack securely locked in place
- See page 332 for repair parts and accessories



28302  
bracket mount



28354  
pipe-mount



28351  
pipe-mount

Bulk#	Pkg#	Capacity	Wind	Travel	Hole Size	Handle Type	Style
28320*	--	2,000 lbs.	Top	10"	9/16"	Claw	Pipe-mount
28350*	28351*	5,000 lbs.	Top	10"	9/16"	Claw	Pipe-mount
28356*	--	5,000 lbs.	Top	15"	5/8"	Claw	Pipe-mount
28322*	28323*	2,000 lbs.	Top	15"	9/16"	Claw	Pipe-mount
28321	--	2,000 lbs.	Side	10"	9/16"	Straight	Pipe-mount
28354	--	5,000 lbs.	Side	10"	5/8"	Straight	Pipe-mount
28358	--	5,000 lbs.	Side	15"	5/8"	Straight	Pipe-mount
28324	--	2,000 lbs.	Side	15"	9/16"	Straight	Pipe-mount
28300*	28301*	2,000 lbs.	Top	10"	--	Claw	Bracket-mount
28302	--	2,000 lbs.	Side	10"	--	Straight	Bracket-mount
28304*	28305*	2,000 lbs.	Top	15"	--	Claw	Bracket-mount
28306	--	2,000 lbs.	Side	15"	--	Straight	Bracket-mount

\*Use replacement handle, bulk# 28937

# DIRECT-WELD SQUARE JACKS

- Designed to weld directly to the trailer frame
- Drop leg with spring return for fast retraction (#28512)
- Pull-pin keeps jack leg securely locked in place
- See page 332 for repair parts and accessories



28512



28570



28575



28359

Part#	Support Capacity	Lift Capacity	Wind	Travel	Handle Type	Includes Jack Foot
28512	12,000 lbs.	10,000 lbs.	Side	12 1/2"	Straight	Yes
28570	8,000 lbs.	7,000 lbs.	Top	15"	Claw	Yes
28575	8,000 lbs.	7,000 lbs.	Side	15"	Straight	Yes
28359	5,000 lbs.	3,000 lbs.	Side	15"	Straight	No

# JACK ACCESSORIES

- Caster assemblies (#28276 and #28277) are not designed as repair parts for marine jacks; use jack repair part number #28912



28270 28271



28273 28272



28275 28274



28277 28276



28278 28279

Bulk#	Pkg#	Capacity	Fits Tube	Height	Wheel Size	Diameter	Description
28270	28271	2,000 lbs.	2"	--	--	--	Jack foot, bolt-on
28272	28273	2,000 lbs.	2"	1 11/16"	--	--	Jack foot
28274	28275	2,000 lbs.	2"	8 1/2"	--	--	Jack foot
28276	28277	1,200 lbs.	2"	--	6" x 2"	--	Caster assembly with poly wheel
28278	28279	--	--	--	--	3/8"	Safety pin

# JACK REPAIR PARTS



28913



28964



28951



28938



28940



28912

Part#	Description
<b>Marine Jacks</b>	
28910	Bolt-through jack mounting bracket
28911	Bolt-through jack mounting bars (two) and bolts (four)
28912	Replacement caster wheel with bolt and bushing
28913	Replacement handle for marine jacks (excluding continue-while-supplies-last jacks)
28914	Gear kit with shear pins
<b>A-Frame Jacks</b>	
28921	Handle for 28200, 28202, 28203, 28250
<b>Swivel Jacks</b>	
28922	Bearing for 2,000 lbs. and 5,000 lbs. top-wind jacks
28923	Handle for 2,000 lbs. and 5,000 lbs. side-wind jacks
28924	Gear kit with shear pins for 2,000 lbs. and 5,000 lbs. side-wind jacks
28930	Female pipe weld-on for 2,000 lbs. and 5,000 lbs. pipe-mounted swivel jacks
28931	Male pipe weld-on for 2,000 lbs. and 5,000 lbs. pipe-mounted swivel jacks, 9/16" pin hole
28932	Male pipe weld-on for 2,000 lbs. and 5,000 lbs. pipe-mounted swivel jacks, 5/8" pin hole
28934	9/16" pin with 3 1/2" long chain
28935	5/8" pin with 3 1/2" long chain
28938	Mounting bracket for bracket-mounted swivel jacks

Part#	Description
<b>Direct-Weld Square Jacks</b>	
28950	Gear kit with shear pins for 28512
28951	Handle for 28512
28952	Cap for 28512
28953	Handle clip for 28512
28954	Bearing for 28512
28955	Pull-pin assembly designed for 28512 (3/4" pull-pin, spring, washer and cotter pin)
28956	Threaded lift nut with grease retaining structure for 28512
28957	Inner pipes with drop leg, foot and pull-pin for 28512
28958	Gear kit with shear pins for 28575
28959	Side-wind handle with pins and bushings for 28575
28960	Side-wind handle with pins, bushings and gears for 28575
28961	Cap and screws for 28575
28962	Drop leg with foot for 28570 and 28575
28963	Drop leg foot pin for 28570 and 28575
28964	Handle kit for 28570
28965	Bearing for 28570
<b>Miscellaneous Repair Parts</b>	
28925	Plastic cap for 2,000 lbs. side-wind jacks
28926	Black handle knob and cap nut
28927	Black handle knob and cap nut for top-wind jacks
28937	Solid handle for top-wind jacks
28939	2" snap ring for 28100, 28304, 28302, 28300
28940	1/2" pull-pin for bracket-mounted swivel and marine jacks



# BULK CHAIN


- High-test chain for wear and abrasion resistance
- Transport chain for binding applications
- Alloy chain for high work load limits
- All bulk chain is sold by the foot

Bulk#	Break Strength	Link Diameter	Grade	Finish
<b>Proof Coil</b>				
82116	3,200 lbs.	3/16"	30	Zinc-plated
82165	3,700 lbs.	5/0	30	Zinc-plated
82105	5,200 lbs.	1/4"	30	Zinc-plated
82170	7,600 lbs.	8/0	30	Zinc-plated
82110	7,600 lbs.	5/16"	30	Zinc-plated
82115	10,600 lbs.	3/8"	30	Zinc-plated
<b>High-test</b>				
82120	7,800 lbs.	1/4"	43	Zinc-plated
82125	11,700 lbs.	5/16"	43	Zinc-plated
82130	16,200 lbs.	3/8"	43	Zinc-plated
<b>Transport</b>				
82135	12,600 lbs.	1/4"	70	Yellow zinc-plated
82140	18,800 lbs.	5/16"	70	Yellow zinc-plated
82145	26,400 lbs.	3/8"	70	Yellow zinc-plated
82155	45,200 lbs.	1/2"	70	Yellow zinc-plated
<b>Alloy</b>				
82158	48,000 lbs.	1/2"	80	Raw
82160	72,400 lbs.	5/8"	80	Yellow zinc-plated



# CUSTOM SAFETY CHAIN

Safety chains are required by law and should be crossed under the tongue of the trailer so that the tongue will not drop to the road if it becomes separated from the hitch. Always leave enough slack so the vehicle can safely turn. Never allow the safety chains to drag on the ground and never attach the chains to the bumper. For chain assemblies built to your exact specifications, contact your CURT sales representative or call 1.877.287.8634.

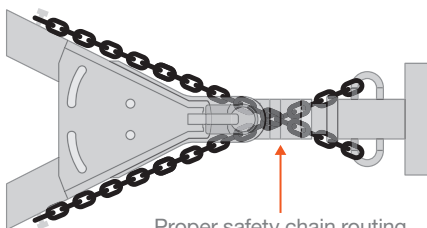

Proper safety chain routing crosses under the coupler

## How to order custom safety chain:

- Step 1 - Determine the gross weight of the trailer  
Example: 7,000 lbs. GTW
- Step 2 - Select chain required  
Example: #82120 zinc-plated (7,800 lbs.)  
Note: By law each individual chain must meet or exceed the GTW
- Step 3 - Determine the required length of chain  
Note: The chains must be long enough to cross one over the other under the coupling point (see illustration to the left)
- Step 4 - Select hook(s) according to capacity and design  
Example: #81900 clevis hook (7,800 lbs.)
- Step 5 - Contact your CURT sales rep for a quote





Federal law requires safety chains to be secured while towing.  
Each individual chain or cable must meet or exceed the trailer weight.

## SAFETY CHAIN WITH S-HOOKS

- Helps resist complete vehicle-trailer separation during a disconnect
- Protected by a durable zinc-plated finish



S-hook



Safety chains in use



Bulk#	Pkg#	Break Strength	Number of Chains	Total Length	Link Diameter	Hooks Per Chain	Hook Size	Chain Length	Grade	Finish
80020	--	2,000 lbs.	1	27"	3/16"	1 (81260)	3/8"	23"	30	Zinc-plated
80010	80011	2,000 lbs.	1	48"	3/16"	2 (81260)	3/8"	40"	30	Zinc-plated
80040	--	5,000 lbs.	1	27"	1/4"	1 (81270)	7/16"	23"	30	Zinc-plated
80030	80031	5,000 lbs.	1	48"	1/4"	2 (81270)	7/16"	40"	30	Zinc-plated
80300	--	7,000 lbs.	1	27"	8/0	1 (81620)	17/32"	23"	30	Zinc-plated
80301	--	7,000 lbs.	1	48"	8/0	2 (81620)	17/32"	40"	30	Zinc-plated

## SAFETY CHAIN WITH SNAP HOOKS

- Helps resist complete vehicle-trailer separation during a disconnect
- Spring-loaded safety latch helps ensure secure attachment
- Protected by a durable zinc-plated finish
- Vinyl coating protects chains from rust and allows for easier handling (#19749)



19749



80312



80313



Snap hook

Bulk#	Pkg#	Break Strength	Number of Chains	Total Length	Link Diameter	Hooks Per Chain	Hook Size	Chain Length	Grade	Finish
80312	--	2,000 lbs.	One	27"	3/16"	1 (81266)	3/8"	24"	30	Zinc-plated
80313	--	5,000 lbs.	One	27"	1/4"	1 (81277)	7/16"	24"	30	Zinc-plated
--	19749	5,000 lbs.	Two	65"	1/4"	2 (81260)	7/16"	60"	30	Zinc-plated with rubber coating

# SAFETY CABLES WITH SAFETY LATCH HOOKS

- Helps resist complete vehicle-trailer separation during a disconnect
- Coiled design keeps cables from dragging on the ground
- Nylon coating protects cables from rust and allows for easier handling
- Assembled with two safety latch hooks for secure attachment



Safety latch S-hook



Safety cables in use



80136



80151



80176

Pkg#	Break Strength	Number of Cables	Total Length	Cable Diameter	Hooks Per Cable	Hook Size	Cable Length	Cable Finish	Hook Finish
80136	3,500 lbs.	2	43 7/8"	1/4"	2 (81810)	3/8"	40 1/2"	Nylon-coated	Zinc-plated
80151	5,000 lbs.	2	44 1/2"	5/16"	2 (81820)	7/16"	40 1/2"	Nylon-coated	Zinc-plated
80176	7,500 lbs.	2	44"	3/8"	2 (81830)	17/32"	39 3/4"	Nylon-coated	Zinc-plated

# SAFETY CHAIN WITH SAFETY LATCH CLEVIS HOOKS

- Helps resist complete vehicle-trailer separation during a disconnect
- Exclusive clevis design and spring-loaded safety latch help ensure secure attachment
- Hook pin and cotter pin provide an easy, secure attachment to safety chain
- Hooks constructed from high-strength, heat-treated, forged steel
- Protected by a durable zinc-plated finish



80315 with 45500



Zinc-plated



Yellow zinc-plated



Safety latch clevis hooks

Part#	Break Strength	Number of Chins	Total Length	Link Diameter	Hooks Per Chain	Hook Size	Chain Length	Grade	Chain Finish	Hook Finish
80302	7,800 lbs.	1	35"	1/4"	1 (81900)	1/4"	32"	43	Zinc-plated	Yellow zinc-plated
80314	11,700 lbs.	1	35"	5/16"	1 (81550)	5/16"	32"	43	Zinc-plated	Yellow zinc-plated
80303	12,600 lbs.	1	35"	1/4"	1 (81940)	1/4"	32"	70	Yellow zinc-plated	Yellow zinc-plated
80315	16,200 lbs.	1	35"	3/8"	1 (81560)	3/8"	31"	43	Zinc-plated	Yellow zinc-plated
80304	18,800 lbs.	1	35"	5/16"	1 (81950)	5/16"	32"	70	Yellow zinc-plated	Yellow zinc-plated
80316	24,000 lbs.	1	35"	3/8"	1 (81960)	3/8"	31"	70	Yellow zinc-plated	Yellow zinc-plated



Federal law requires safety chains to be secured while towing.  
Each individual chain or cable must meet or exceed the trailer weight.

## TRANSPORT BINDER SAFETY CHAIN

- Designed for tying down and binding heavy-duty cargo
- Grade 70 rating for superior tensile strength and abrasion resistance
- Assembled with two clevis grab hooks for secure attachment
- Protected by a durable yellow zinc-plated finish
- Do not exceed work load limit



80306



80308

Part#	Work Load	Break Strength	Total Length	Link Diameter	Hooks Per Chain	Hook Size	Chain Length	Grade	Finish
80305	4,700 lbs.	18,800 lbs.	14'	5/16"	2 (81503)	5/16"	162"	70	Yellow zinc
80306	4,700 lbs.	18,800 lbs.	16'	5/16"	2 (81503)	5/16"	186"	70	Yellow zinc
80307	4,700 lbs.	18,800 lbs.	20'	5/16"	2 (81503)	5/16"	234"	70	Yellow zinc
80308	4,700 lbs.	18,800 lbs.	25'	5/16"	2 (81503)	5/16"	294"	70	Yellow zinc
80309	6,600 lbs.	26,400 lbs.	14'	3/8"	2 (81438)	3/8"	162"	70	Yellow zinc
80310	6,600 lbs.	26,400 lbs.	16'	3/8"	2 (81438)	3/8"	186"	70	Yellow zinc
80311	6,600 lbs.	26,400 lbs.	20'	3/8"	2 (81438)	3/8"	234"	70	Yellow zinc

## CLEVIS GRAB HOOKS

- Designed for use on transport binder safety chain to tie down heavy cargo
- Can also be used to connect safety chains from trailer to tow vehicle
- Meets requirements for high-test chain
- Hook pin and cotter pin provide an easy, secure attachment to safety chain
- Constructed from high-strength, heat-treated steel
- Protected by a durable zinc-plated finish



81330



81502



81340



81503



81350



81438

Part#	GTW	Hook Size	Grade	Finish
81330	2,600 lbs.	1/4"	43	Zinc-plated
81502	3,150 lbs.	1/4"	70	Yellow zinc-plated
81340	3,900 lbs.	5/16"	43	Zinc-plated
81503	4,700 lbs.	5/16"	70	Yellow zinc-plated
81350	5,400 lbs.	3/8"	43	Zinc-plated
81438	6,600 lbs.	3/8"	70	Yellow zinc-plated

# SAFETY LATCH CLEVIS HOOKS

- Quickly and easily connects safety chains from trailer to tow vehicle
- Exclusive design and spring-loaded safety latch help ensure secure attachment
- Meets requirements for high-test chain
- Hook pin and cotter pin provide an easy, secure attachment to safety chain
- Built from high-strength, heat-treated, forged steel
- Protected by a durable yellow zinc-plated finish

Part#	GTW	Hook Size	Grade	Hook Size
<b>Clevis Hooks</b>				
81900	7,800 lbs.	1/2"	43	1/4"
81940	12,600 lbs.	1/2"	70	1/4"
81550	14,000 lbs.	3/4"	43	5/16"
81950	18,000 lbs.	3/4"	70	5/16"
81560	18,000 lbs.	1"	43	3/8"
81960	24,000 lbs.	1"	70	3/8"
81970	40,000 lbs.	1 1/3"	80	7/16"
81910	35,000 lbs.	1 1/4"	43	1/2"
81980	48,000 lbs.	1 1/4"	80	1/2"
81920	65,000 lbs.	1 1/4"	80	5/8"
<b>Replacement Latch</b>				
81999	Fits 81950 and 81960			



# CERTIFIED & SAFETY LATCH S-HOOKS

- Quickly and easily connects safety chains from trailer to tow vehicle
- Tested for safety in accordance with SAE-J684
- Wire safety latch helps ensure secure attachment
- Constructed from high-strength, heat-treated steel
- Protected by a durable zinc-plated finish

Part#	GTW	Hook Size	Safety Latch
81260	2,000 lbs.	3/8"	No
81810	2,000 lbs.	3/8"	Yes
81640	3,500 lbs.	13/32"	No
81840	3,500 lbs.	13/32"	Yes
81270	5,000 lbs.	7/16"	No
81820	5,000 lbs.	7/16"	Yes
81620	7,600 lbs.	17/32"	No
81830	7,600 lbs.	17/32"	Yes







Federal law requires safety chains to be secured while towing.  
Each individual chain or cable must meet or exceed the trailer weight.

## SNAP HOOKS

- Quickly and easily connects safety chains from trailer to tow vehicle
- Spring-loaded safety latch helps ensure secure attachment
- Patent# 5,664,304

Bulk#	Pkg#	GTW	Diameter
81266	81261	2,000 lbs.	3/8"
81277	81271	5,000 lbs.	7/16"
81288	81281	5,000 lbs.	9/16"
81360	--	3,500 lbs.	5/8" eye



## QUICK LINKS

- Provides a quick connection for chains, cables, ropes or straps
- Threaded link ensures secure attachment with the option to disconnect later
- Requires no tools for installation
- Do not exceed work load limit

Bulk#	Pkg#	Two-Pack#	Work Load	Diameter	Finish
82610	82611	--	880 lbs.	1/4"	Zinc
82900	82901	82903	1,760 lbs.	5/16"	Zinc
82930	82933	--	2,200 lbs.	3/8"	Zinc
82931	--	--	2,640 lbs.	7/16"	Zinc
82932	--	--	3,300 lbs.	1/2"	Zinc



## JOINING LINKS

- Constructed from 1038 steel
- Do not use for lifting

Part#	Finish	Size
82940	Raw	9/0
82942	Raw	7/16"
82943	Zinc-plated	9/0
82944	Zinc-plated	7/16"



# HAND WINCHES

- Crank-style winch for boat trailers or hoisting applications
- Constructed from high-strength, cold-forged steel
- Equipped with a locking lever for increased safety
- Strong pinions eliminate gear-to-shaft bonding failures
- Broached pinion shaft securely engages the pinion gear
- Handle with plastic grip cover for easy, comfortable operation
- Base features slotted screw holes for flexible mounting
- Straps made from 2" wide, no-stretch nylon web
- Zinc-plated snap hook for easy, secure hookup



23423 pinion gear



23424 pinion gear



23427 crank handle



23438 locking lever



Pkg#	Capacity	Gear Ratio	Hub Diameter	Handle Length	Strap
29423	900 lbs.	3.25:1	3/4"	6 1/2"	No
29433	900 lbs.	3.25:1	3/4"	6 1/2"	Yes, 15' (29450)
29424	1,200 lbs.	4.2:1	3/4"	7 1/2"	No
29425	1,400 lbs.	4.2:1	3/4"	7 1/2"	No
29435	1,400 lbs.	4.2:1	3/4"	7 1/2"	Yes, 20' (29451)
29427	1,700 lbs.	5.1:1	1"	8"	No
29428	1,900 lbs.	5.1:1	1"	8"	No
29438	1,900 lbs.	5.1:1	1"	8"	Yes, 20' (29451)
29429	2,100 lbs.	5.1:1	1"	9 3/4"	No

# WINCH STRAPS

- Made from 2" wide, no-stretch nylon web
- Zinc-plated snap hook for easy, secure hookup



Bulk#	Pkg#	Work Load	Break Strength	Strap Width	Strap Length
29007	--	1,333 lbs.	4,000 lbs.	2"	20'
--	29450	1,100 lbs.	3,300 lbs.	2"	15'
--	29451	1,100 lbs.	3,300 lbs.	2"	20'

# WHEEL BEARING KITS

- Automatically maintains the correct internal pressure to avoid seal damage
- Includes two bearing cones, two bearing cups, a grease seal and cotter pin

Pkg#	Spindle O.D.	Kit Includes
23209	3/4"	(2) LM11910, (2) LM11949, seal, cotter pin
23210	1"	(2) L44643, (2) L44610, seal, cotter pin
23211	1 1/16"	(2) L44649, (2) L44610, seal, cotter pin



# BEARING PROTECTORS & REPLACEMENT DUST COVERS

- Protects wheel bearings from dirt, water and road grime
- Maintains pressure and keeps bearing greased
- Features a small reservoir to keep bearings well-lubricated
- Covers prevent dust and debris from entering the bearing protector
- Includes two protectors and two dust covers



Bearing Protector#	Replacement Cover Two-Pack#	Hub Bore Size
22178	23178	1.78" diameter
22198	23198	1.98" diameter
22232	23232	2.32" diameter
22244	23244	2.44" diameter

# WHEEL CHOCK SET

- Perfect for chocking wheels on a parked trailer or adding safety during vehicle maintenance
- Raised tread offers a better grip on the wheel
- Saw-tooth edges on the base provide solid traction on the ground
- Always to be used with vehicle brake
- Not for commercial use



Part#	Description
22800	For use with wheels up to 17" wide

# CARGO STRAPS

- Perfect for securing cargo in trailers, truck beds and more
- Offers a superior tie-down method compared to bungee cords and rope
- Cambuckle mechanism allows for direct tension on lighter loads
- Ratchet mechanism allows for greater tension on heavy loads
- Straps constructed from high-strength, woven nylon
- Cinching components protected by a durable yellow zinc-plated finish



Secures cargo better than bungee cords or rope



Pkg#	Work Load	Break Strength	Strap Color	Strap Length	Strap Width	Hook Style	Hook Finish	Strap Quantity	Mechanism
83015	300 lbs.	900 lbs.	Dark green	15'	1"	S-hook	Rubber-coated	2	Cambuckle
83016	300 lbs.	900 lbs.	Dark green	16'	1"	S-hook	Rubber-coated	4	Cambuckle
83001	500 lbs.	1,500 lbs.	Red	10'	1"	S-hook	Rubber-coated	2	Ratchet
83002	500 lbs.	1,500 lbs.	Red	16'	1"	S-hook	Rubber-coated	4	Ratchet
83009	500 lbs.	1,500 lbs.	Black	10'	1"	S-hook	Rubber-coated	2	Ratchet
83010	500 lbs.	1,500 lbs.	Black	16'	1"	S-hook	Rubber-coated	4	Ratchet
83019	733 lbs.	2,200 lbs.	Blue	16'	1"	J-hook	Rubber-coated	1	Ratchet
83020	733 lbs.	2,200 lbs.	Blue	16'	1"	J-hook	Rubber-coated	2	Ratchet
83025	1,100 lbs.	3,300 lbs.	Orange	16'	1"	J-hook	Rubber-coated	1	Ratchet
83026	1,100 lbs.	3,300 lbs.	Orange	16'	1"	J-hook	Rubber-coated	2	Ratchet
83027	1,100 lbs.	3,300 lbs.	Lime green	16'	1"	S-hook	Rubber-coated	1	Ratchet
83028	1,100 lbs.	3,300 lbs.	Lime green	16'	1"	S-hook	Rubber-coated	2	Ratchet
83036	1,667 lbs.	5,000 lbs.	Yellow	14'	1 1/2"	J-hook	Yellow zinc-plated	1	Ratchet
83047	3,333 lbs.	10,000 lbs.	Yellow	27'	2"	J-hook	Yellow zinc-plated	1	Ratchet
83048	3,333 lbs.	10,000 lbs.	Yellow	27'	2"	Flat hook	Yellow zinc-plated	1	Ratchet



# RINGS & TIE-DOWN ANCHORS

See page 343 for  
part number table

## Recessed rope rings

- Recessed design eliminates obstruction and provides a finished look
- Adds a convenient anchor point for ropes, bungee cords or straps
- Perfect for cargo management in trailers, trucks and vans
- Constructed from high-strength steel
- Protected by a durable zinc-plated finish
- Mounting screws not included



83601



83710



83600

## D-rings

- Square holes accept 3/8" carriage bolts (#83740 and #83742)
- Adds a convenient anchor point for ropes, bungee cords or straps
- Perfect for cargo management in trailers, trucks and vans
- Constructed from high-strength steel
- Mounting screws not included



83740



83742



83730



83732



83731

## Lashing rings

- Adds a heavy-duty anchor point for ropes, cables, straps or chains
- Perfect for heavyweight cargo management in trailers, trucks and vans
- Raw finish allows for ready welding of mounting bracket
- Large opening offers a reliable anchoring point
- Constructed from high-strength, forged steel



83750



83760



83770



83780



Shown on trailer

## Backing plate

- Allows for more secure attachment of tie-down anchors
- Constructed from high-strength steel
- Compatible with #83600, #83740 and #83742
- Mounting screws not included



83607



83740 & 83607



83600 & 83607

## Trim ring

- Provides a clean, finished look for recessed plate #83710
- Helps protect plate edges from damage and corrosion
- Constructed from durable black plastic



83720



83710 in 83720

# RINGS & TIE-DOWN ANCHORS

Part#	Capacity	Break Strength	Finish	Base Size	Mount Hole Size	Mounting Hole Pattern	Ring I.D.	Ring Thickness
<b>Recessed Rope Rings</b>								
83710	1,000 lbs.	1,000 lbs.	Zinc-plated	3 1/2" x 3 1/2"	1/4"	1 3/16"	1 1/8" x 1 5/8"	1/4"
83601	1,200 lbs.	1,200 lbs.	Zinc-plated	5" x 3 1/2"	1/4"	4 1/16" x 1/4"	1 3/8" x 1 7/8"	1/4"
83600	5,000 lbs.	5,000 lbs.	Zinc-plated	4 7/8" x 4 1/2"	3/8"	3 3/8" x 2 7/8"	1 1/2" x 1 1/2"	1/2"
<b>D-Rings</b>								
83730	1,200 lbs.	1,200 lbs.	Zinc-plated	2 1/4" x 13/16"	1/4"	1 1/2"	1" x 1 1/4"	1/4"
83731*	1,200 lbs.	1,200 lbs.	Zinc-plated	2 1/4" x 13/16"	1/4"	1 1/2"	1" x 1 1/4"	1/4"
83732	1,200 lbs.	1,200 lbs.	Stainless	2 1/4" x 13/16"	1/4"	1 1/2"	1" x 1 1/4"	1/4"
83740	3,600 lbs.	11,000 lbs.	Yellow zinc-plated	1 3/4" x 3 11/16" x 7/8"	7/16"	2"	3" x 3"	1/2"
83742	3,600 lbs.	11,000 lbs.	Zinc-plated	1 3/4" x 3 11/16" x 7/8"	7/16"	2"	3" x 3"	1/2"
<b>Lashing Rings</b>								
83750	6,100 lbs.	18,000 lbs.	Raw steel	2 1/4" x 1 5/8" x 1 1/4"	--	--	3" x 3"	5/8"
83760	8,833 lbs.	26,500 lbs.	Raw steel	2 1/4" x 1 5/8" x 1 1/4"	--	--	3" x 3"	3/4"
83770	15,587 lbs.	46,760 lbs.	Raw steel	2 1/4" x 2 1/8" x 1 3/4"	--	--	3" x 3"	1"
83780	15,587 lbs.	46,760 lbs.	Raw steel	2 1/4" x 2 1/8" x 1 3/4"	--	--	3" x 4"	1"
<b>Backing Plate and Trim Ring</b>								
83607	--	--	Gloss black	6" x 6"	7/16"	3" x 3 1/4" (2" center)	--	--
83720	--	--	Plastic	--	--	--	3" x 3"	3/8"

\* Packaged two-pack