
ovBeacon MB2-200

ovSolar (Omnivoltaic Power Company Limited)

Results based on test procedures detailed in IEC 62257-9-5, ed. 3.0

Verify Online: www.lightingglobal.org/products/mar-mb2200 *Valid Until:* October 31, 2021



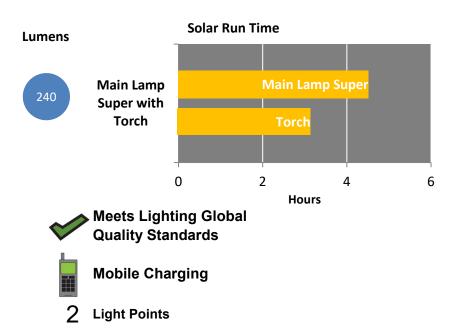

Warranty Information

A 2-year warranty against material or manufacturing defects.

Performance Details			
	Brightness Setting**		
Performance Measure	Main Lamp Super with Torch	Main Lamp Super	Torch On
Full battery run time* (hours)		5.3	5
Run time per day of solar charging* (hours)	4.4 (Main Lamp Super) 3.4 (Torch)		
Total light output (lumens)	210 (Main Lamp Super) 32 (Torch)	210	32
Total lighting service (lumen-hours / solar-day)	1000		

* Run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

** Additional brightness settings (not tested): Main lamp Normal, Main lamp Bed Light

Lighting Details		
Lamp type	LED	
Description of light points	One main lamp and one torch	
Colour characteristics	CRI 72	
	CCT "Cool" (3000-5000 K)	
Distribution type	Wide	
Lumen maintenance	93% of the original output remains after 2,000	
	hours run time	
Special Features		
Mobile charging	Adapters included to charge mobile phone from	
	Main lamp battery	
Draduat hav	Box acts as a stand to use Main lamp as desk	
Product box	light	
LEDs	UV-free LEDs	
Batteries	High-temperature batteries used	
Demete	Torch acts as wireless remote to turn Main lamp	
Remote	on/off	
Durability		
Overall durability and workmanship	Pass	
Durability tests passed	Drop test, switch and connector cycling, strain	
	relief test, physical ingress protection test. Main	
	lamp has protection from frequent rain. Met	
	IPX1 and has a warning label. Torch has	
	protection from occasional rain. Met	
	requirements with a warning label.	
Solar Details		
PV module type	Polycrystalline silicon	
PV maximum power point	2.6 watts	
· · ·		
Battery Details		
	Battery in the main lamp is easily replaceable	
Battery replaceability	with common tools. Torch battery is not easily	
	replaceable.	
Battery chemistry	Lithium iron phosphate	
Battery package type	Main lamp: 26650 Torch: 14500	
Battery capacity	Main lamp: 3200 mAh Torch: 540 mAh	
Battery nominal voltage	3.2 V	
Appropriate battery protection circuit	Pass	

Product Details		
Manufacturer name	ovSolar (Omnivoltaic Power Company Limited)	
Product name	ovBeacon MB2-200	
Product model / ID number	MB2-200	
Contact information	info@ovsolar.com	
Website	www.ovsolar.com	

SSS Information	
Specs sheet expiration date	October 31, 2021
Quality Standards Framework Version	2018
Revision	2018.11