

# Solar 4 Bulbs Home Lighting and Charging System

SR25

Solar Run Energy Co. Ltd.

Results based on test procedures detailed in IEC 62257-9-5 v.4

Verify online:

<https://data.verasol.org/productsssr-s4b>

Valid until March 31, 2023



Meets the Lighting Global Pico-PV Quality Standards




Mobile charging

4

Light point(s)



Plug-and-play

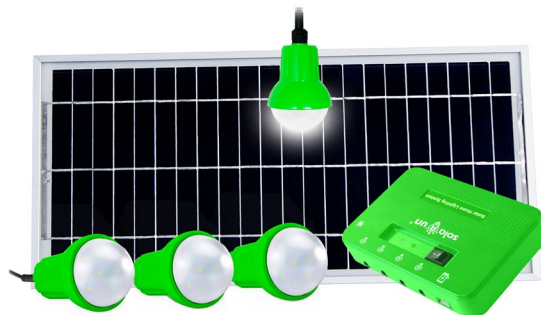

## WARRANTY INFORMATION

A 1-year warranty covers manufacturing defects.

## PERFORMANCE DETAILS

			Run time after a typical day of solar charging (assuming 5kWh/m <sup>2</sup> /day)	
	Appliance <sup>a</sup>	Description	Used alone <sup>b</sup>	Used in combination <sup>c</sup>
included in kit	Main lighting unit	4 lights on high totalling 680 lumens and 5.6 W	4.3 hours	1 hours
sold separately	Mobile phone	Smart phone (5.7 Wh battery)	2.9 full charge(s)	0.27 full charge(s)
	Fan	USB table fan with 2.5 W power	2 hours	1.3 hours

Available daily electrical energy<sup>c</sup> (Wh/day)

20

Performance measure	Brightness setting: High
Lighting full battery run time <sup>d</sup> for main unit (hours)	6
Total lighting service (lumen-hours/solar-day) (includes the both main lighting unit and any auxiliary lights included with the product)	2900

<sup>a</sup> Only included appliances were tested. Run times and power ratings for appliances sold separately come from manufacturer ratings or standard estimates.

<sup>b</sup> Without any other loads used during the run time

<sup>c</sup> Based on an example use profile with all of the appliances listed in the "Used in combination" column used simultaneously.

<sup>d</sup> Lighting full battery run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

## LIGHTING DETAILS

Lamp name	Number of lamps	Number of settings	Setting	Light output (lm)	Lumen efficacy <sup>e</sup> (lm/W)	CRI <sup>f</sup>	CCT <sup>g</sup>	Distribution type	Lumen maintenance <sup>h</sup>
2 W lamp	4	2	High	170	120	74	7400	Wide	100%

<sup>e</sup> Lumen efficacy is the power consumption at a light point during the light output test.

<sup>f</sup> Color Rendering Index. An index of 100 is equivalent to viewing objects in daylight; above 80 is considered good.

<sup>g</sup> Correlated Color Temperature in degrees Kelvin. Describes color appearance as warm (2700-3000 K), cool (3000-5000 K), or daylight (>5000 K)

<sup>h</sup> Percent of the original light output that remains after 2,000 hours of run time

## PORTS

1

USB 2.0 type A



One 5 V USB port is available on the main unit.

4

Barrel jack



Four 7.4V barrel jacks are available to power light points.

## DURABILITY

Overall durability and workmanship		Pass
Durability tests passed		Switch test, Drop test, Strain relief test, physical ingress protection.
Level of water protection	Main Lighting Unit	Water ingress protection not tested, meant for indoor use only.
	PV module	Has protection from permanent outdoor exposure
<b>SOLAR DETAILS</b>		
PV module type		Polycrystalline silicon
PV maximum power		7.8 watts
<b>BATTERY DETAILS</b>		
Battery replaceability		Easily replaceable with common tools.
Battery chemistry		Lithium-ion
Battery package type		4 x 18650
Battery capacity		5.3 Ah
Battery nominal voltage		7.4 V
Battery status indication		One indicator for charging status and one for operating status.
<b>PRODUCT DETAILS</b>		
Manufacturer name		Solar Run Energy Co. Ltd.
Product name		Solar 4 Bulbs Home Lighting and Charging System
Product model / ID number		SR25
Contact information		info@solarunoffgrid.com
Website		http://www.solarunoffgrid.com/
Dimensions (entire product in package)		19 x 36 x 7.5 cm
Mass		2145 g
<b>SSS INFORMATION</b>		
Specs sheet expiration date		March 31, 2023
Quality standards framework version		2020
Revision		2023.02