

# VeraSol

## Standardized Specifications Book

**Company Name:** Emining & IT Ltd

**Brand Name:** Emining Corporation

**Component Family Name:** EMSOLA-PRO Family


**Family Expiration Date:** December 31, 2026

**Verify Online:** <https://data.verasol.org/products/sek/ec-emsolaprofamily>

**Contact Information:** info@eminingcorp.com, +250 787 978 173

**Website:** www.eminingcorp.com

**Co-brand of:** SR26 Family  
(Shenzhen Solar Run Energy Co., Ltd.)

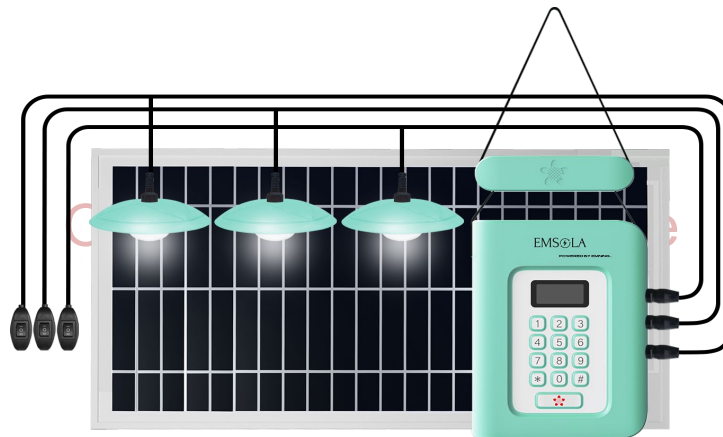

This VeraSol Standardized Specifications Book presents a component-level Standardized Specifications Sheet listing the available components in the product family by component type, each individual component's performance rating, and performance results for each component tested according to the Edition 4 of IEC 62257-9-5. Following the component-level Standardized Specifications Sheet is a list of the systems covered by this Specifications Book that use combinations of these components.

NOTICE: Systems or kits developed using components from the component family will each perform differently and have not all been evaluated on a system-level basis. All systems listed in this Specifications Book are regarded to have passed IEC TS 62257-9-8.

**Quality Standards Framework Version:** 2025

**Revision:** 2025.08

# Component-Level Standardized Specifications Sheet

Emining & IT Ltd  
EMSOLA-PRO Family

## Batteries / Control Boxes

Name / Model Number	Battery Chemistry	Nominal Voltage (V)	Battery Capacity Rating (mAh)	Measured Battery Capacity (mAh)
6 Ah main unit	Lithium iron phosphate	6.4	6000	6000
Torch (SR03) battery	Lithium iron phosphate	3.2	400	520
Radio (F170) battery	Lithium ion	3.7	1500	2000

## PV Modules

Name / Model Number	Peak Power at STC Rating (W)	Measured Peak Power at STC (W)
10 W monocrystalline PV module	10	10
12 W monocrystalline PV module	12	12
15 W monocrystalline PV module	15	Not tested
21 W monocrystalline PV module	21	20

## Light Sources^

Name / Model Number	Luminous Flux Rating (lm)				Measured Luminous Flux (lm)				Measured Lamp Efficacy (lm/W)			
	High	Low	On	Front Light	High	Low	On	Front Light	High	Low	On	Front Light
1 W bulb	-	-	120	-	-	-	140	-	-	-	170	-
2 W bulb	240	120	-	-	300	not tested	-	-	160	not tested	-	-
Torch (SR03)	-	-	-	50	-	-	-	59	-	-	-	100

## Appliances^

Name / Model Number	Description	Rated Power (W)	Measured Power During Use (W)	Rated Battery Capacity (mAh)	Measured Battery Capacity (mAh)
Torch (SR03)	59 lumens torch, (LiFePO4 battery: 0.52 Ah, 3.2 V)	0.4	0.35	400	520
Radio (F170)	Portable radio with 3.7 V internal battery	3	0.33	1500	2000

^ Light points and appliances may perform differently when used with different systems.

NOTICE: As indicated, not all components listed on this page were tested according to the Quality Test Method (QTM) in Edition 4 of IEC 62257-9-5. However, based on the satisfactory performance of the tested components in the family, the components that were not tested are regarded to have passed IEC TS 62257-9-8:2020. In addition, all tested components passed an internal inspection, the full array of applicable QTM durability tests, as well as ingress protection testing (where applicable).

# List of Covered Systems

Emining & IT Ltd  
EMSOLA-PRO Family

## Number of each component included in each system

Originally tested system name included in the SR26 Family	6 Ah main unit	1 W bulb	2 W bulb	10 W monocrystalline PV module	12 W monocrystalline PV module	15 W monocrystalline PV module	21 W monocrystalline PV module	Torch (SR03)	Radio (F170)
ECOSHINE Solar Home System (SR26A32XG)**	1	--	3	--	1	--	--	1	--

## Number of each component included in each system

Co-branded system name	6 Ah main unit	1 W bulb	2 W bulb	10 W monocrystalline PV module	12 W monocrystalline PV module	15 W monocrystalline PV module	21 W monocrystalline PV module	Torch (SR03)	Radio (F170)
EMSOLA-PRO	1	--	3	--	--	1	--	1	--

\*\*Tested as full systems. Individual SSS available on VeraSol website.

### NOTICE:

Only the kits denoted with \*\* were tested as full systems according to Edition 4 of IEC 62257-9-5 and passed IEC 62257-9-8 standards. An Individual Standardized Specification Sheet (SSS) that reports system-level performance is available for these systems at VeraSol.org. Systems that were not tested, but that were developed using components from the component family will perform differently than the system(s) shown in the individual system-level SSS. All systems listed above are regarded to have passed IEC TS 62257-9-8:2020..

Unless otherwise noted, the following information applies to all listed systems and components:

### Warranty Information

A 2-year warranty covering manufacturing defects in the system.

# Available Daily Electrical Energy and Port Information

Emining & IT Ltd  
EMSOLA-PRO Family

System Name	Available Daily Electrical Energy (Wh/day)	Includes ports for charging?
<b>ECOSHINE Solar Home System (SR26A32XG)**</b>	28	yes
<b>EMSOLA-PRO</b>	36	yes

\*\*Tested as full systems. Individual SSS available on VeraSol website.

## **NOTICE:**

The available daily electrical energy (Wh/day) is calculated for fully tested systems following the energy service calculations as described in IEC/TS 62257-9-5 Edition 4. For products in a family that are not tested as a full system, estimations of available daily electrical energy (Wh/day) are calculated according to an alternative method using data from the test reports of fully-tested products and components.