


Cable tray



KRB-40-600 L=2000 PG

Perforated cable trays are used in places where cables have to be protected underneath. Perforation enhances airflow and cools the cables installed on the tray. Typically used in office- and commercial buildings, schools, hospitals and shopping centres but also in warehouses, parking halls and industrial buildings.

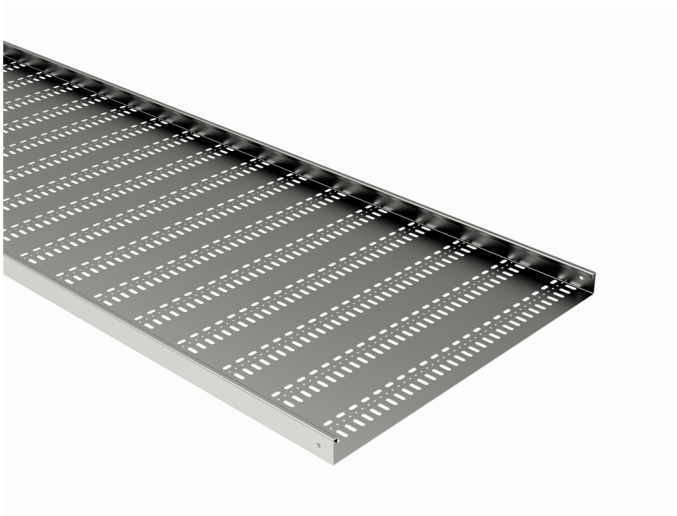

Product name	KRB-40-600 L=2000 PG		
SKU	1431246		
Material	Steel		
Corrosivity category	C1-C2		
Color	Grey		
Sales unit	MTR		
Packing size	15 PCE / 30 MTR		
Dimensions (mm) Width Height Length	600	40	2000
Weight (kg/pce)	12,07		
GTIN	6438377009465		
Surface finish	Manufactured of hot-dip galvanized steel in accordance with standard EN 10346		

Dimension L (mm)	2000
Dimension A (mm)	600
Dimension H (mm)	40
Material thickness (mm)	1,25

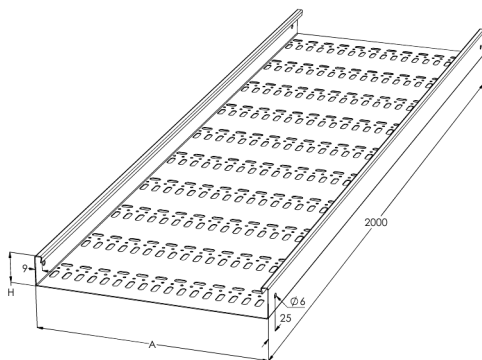

KRA/KRB 40 | WIDTHS 400, 500, 600

Compliant with the IEC 61537 standard.

