


Cable tray



KRB-60-400 L=3000 XPG

Perforated cable trays are used in places where cables have to be protected underneath. Perforation enhances airflow and cools the cables installed on the tray. KRB-type trays are typically used in office- and commercial buildings, schools, hospitals and shopping centres but also in warehouses, parking halls and industrial buildings. To extend KRB cable trays joints RSS can be used. Joints RSS-40-100...500 have a special forming that allow to fasten these directly to wall or ceiling supports.

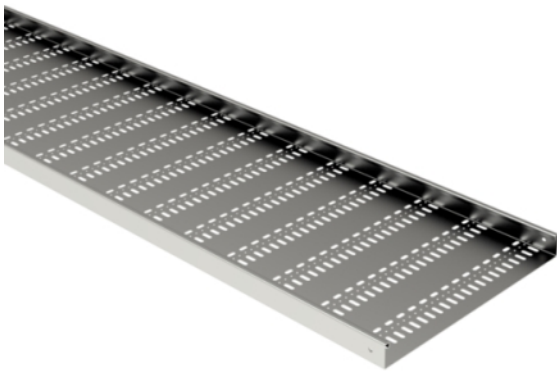

Product name	KRB-60-400 L=3000 XPG		
SKU	1432091		
Material	Steel		
Corrosivity category	C1-C4		
Color	Grey		
Sales unit	MTR		
Packing size	10 PCE / 30 MTR		
Dimensions (mm)			
Width Height Length	400	60	3000
Weight (kg/pce)	14,05		
GTIN	6438377128555		
Surface finish	Manufactured of coated steel in accordance with standard EN 10346		

Dimension L (mm)	3000
Dimension A (mm)	400
Dimension H (mm)	60
Material thickness (mm)	1,25

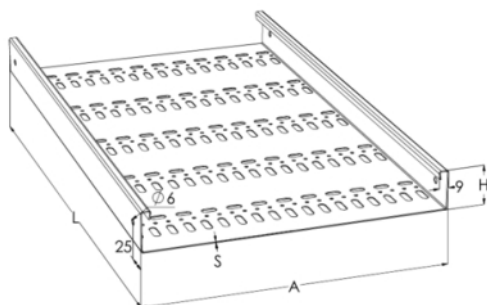

KRA/KRB 60 | WIDTHS 400, 500, 600

Compliant with the IEC 61537 standard.

