


# Intermediate support MK-416 PG

Intermediate supports MK are used for supporting KS20- and KS60-type cable ladders into ceiling by using threaded rods GT (one or two) or mounting rails PS.

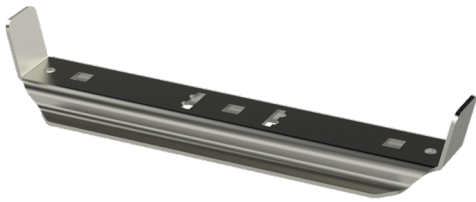

Product name	MK-416 PG		
SKU	1449254		
Material	Steel		
Corrosivity category	C1-C2		
Color	Grey		
Sales unit	PCE		
Packing size	10 PCE		
Dimensions (mm) Width   Height   Length	386	51	71
Weight (kg/pce)	0,62		
GTIN	6438377020095		
Surface finish	Manufactured of hot-dip galvanized steel in accordance with standard EN 10346		

Dimension A (mm)	386
Dimension B (mm)	150
Dimension C (mm)	16,5

