# Corner piece
# KS100 L45-500 R=300 XPG

Bends KS100 L45 are used to make 45° angles for KS100-type cable ladders when the bending radius of cables or other needs require this. KS100 L90 inside radius is R=300 mm.

Bends can be connected to cable ladders by using joints KS100 J.



| | | | |
|---|---|---|---|
| **Product name** | **KS100 L45-500 R=300 XPG** | | |
| **SKU** | **1478270** | | |
| **Material** | | | |
| **Corrosivity category** | | | |
| **Color** | | | |
| **Sales unit** | **PCE** | | |
| **Packing size** | **1 PCE** | | |
| **Dimensions (mm)**<br>**Width \| Height \| Length** | **730** | **100** | **910** |
| **Weight (kg/pce)** | **4,4** | | |
| **GTIN** | **6438377160296** | | |
| **Surface finish** | | | |

| | |
|---|---|
| Dimension A (mm) | 500 |
| Dimension B (mm) | 730 |
| Radius R (mm) | 300 |
| CO2e/kg | 2,72 |

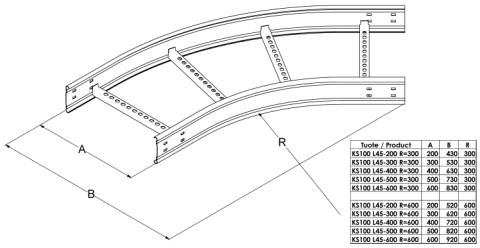


| Tuote / Product | A | B | R |
|---|---|---|---|
| KS100 L45-200 R=300 | 200 | 430 | 300 |
| KS100 L45-300 R=300 | 300 | 530 | 300 |
| KS100 L45-400 R=300 | 400 | 630 | 300 |
| KS100 L45-500 R=300 | 500 | 730 | 300 |
| KS100 L45-600 R=300 | 600 | 830 | 300 |
| KS100 L45-200 R=600 | 200 | 520 | 600 |
| KS100 L45-300 R=600 | 300 | 620 | 600 |
| KS100 L45-400 R=600 | 400 | 720 | 600 |
| KS100 L45-500 R=600 | 500 | 820 | 600 |
| KS100 L45-600 R=600 | 600 | 920 | 600 |

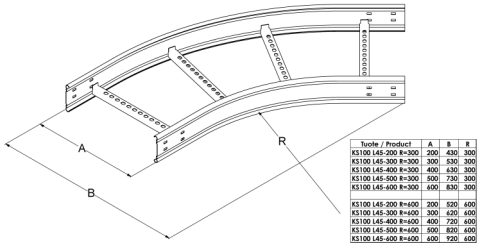


| Tuote / Product | A | B | R |
|---|---|---|---|
| KS100 L45-200 R=300 | 200 | 430 | 300 |
| KS100 L45-300 R=300 | 300 | 530 | 300 |
| KS100 L45-400 R=300 | 400 | 630 | 300 |
| KS100 L45-500 R=300 | 500 | 730 | 300 |
| KS100 L45-600 R=300 | 600 | 830 | 300 |
| KS100 L45-200 R=600 | 200 | 520 | 600 |
| KS100 L45-300 R=600 | 300 | 620 | 600 |
| KS100 L45-400 R=600 | 400 | 720 | 600 |
| KS100 L45-500 R=600 | 500 | 820 | 600 |
| KS100 L45-600 R=600 | 600 | 920 | 600 |

**MEKA PRO OY**
**Konetie 25 / FI-90620 Oulu, Finland / +358 207 450 800 / meka@meka.eu**

© Right to changes reserved. Propria Oy is the owner of all Meka Pro Oy trademarks.