
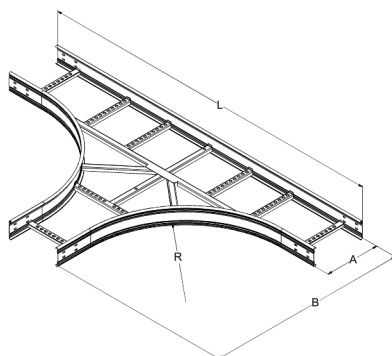


## T-piece

### KS100 T-300 R=600 XPG

T-pieces KS100 T are used to make T-junctions for KS100-type cable ladders when the bending radius of cables or other needs require this. KS100 T inside radius is R=600 mm.

T-pieces can be connected to cable ladders by using joints KS100 J.

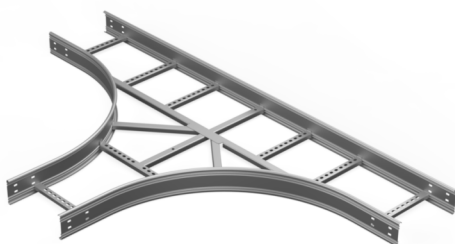

| T-piece / Product  | A   | B    | L    | R    |
|--------------------|-----|------|------|------|
| KS100 T-300 R=300  | 200 | 700  | 1200 | 300  |
| KS100 T-300 R=400  | 300 | 800  | 1300 | 400  |
| KS100 T-400 R=300  | 400 | 900  | 1400 | 300  |
| KS100 T-400 R=400  | 500 | 1000 | 1500 | 400  |
| KS100 T-400 R=500  | 600 | 1100 | 1600 | 500  |
| KS100 T-300 R=600  | 200 | 985  | 1770 | 600  |
| KS100 T-300 R=800  | 300 | 1085 | 1870 | 800  |
| KS100 T-400 R=600  | 400 | 1185 | 1970 | 600  |
| KS100 T-400 R=800  | 500 | 1285 | 2070 | 800  |
| KS100 T-400 R=1000 | 600 | 1385 | 2170 | 1000 |

|                                            |                                                                   |     |      |
|--------------------------------------------|-------------------------------------------------------------------|-----|------|
| Product name                               | KS100 T-300 R=600 XPG                                             |     |      |
| SKU                                        | 1478153                                                           |     |      |
| Material                                   | Steel                                                             |     |      |
| Corrosivity category                       | C1-C4                                                             |     |      |
| Color                                      | Grey                                                              |     |      |
| Sales unit                                 | PCE                                                               |     |      |
| Packing size                               | 1 PCE                                                             |     |      |
| Dimensions (mm)<br>Width   Height   Length | 1870                                                              | 100 | 1085 |
| Weight (kg/pce)                            | 11,98                                                             |     |      |
| GTIN                                       | 6438377120283                                                     |     |      |
| Surface finish                             | Manufactured of coated steel in accordance with standard EN 10346 |     |      |

|                  |      |
|------------------|------|
| Dimension L (mm) | 1870 |
| Dimension A (mm) | 300  |
| Dimension B (mm) | 1035 |
| Radius R (mm)    | 600  |
| CO2e/kg          | 2,72 |