
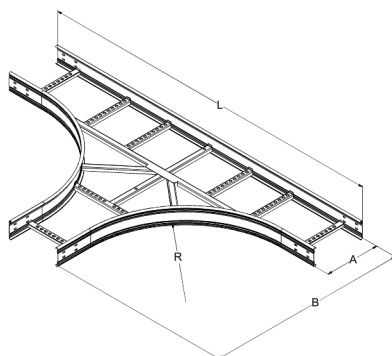


T-piece

KS100 T-600 R=600 PG

T-pieces KS100 T are used to make T-junctions for KS100-type cable ladders when the bending radius of cables or other needs require this. KS100 T inside radius is R=600 mm.

T-pieces can be connected to cable ladders by using joints KS100 J.

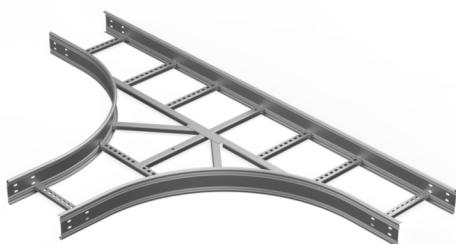

Tuote / Product	A	B	L	R
KS100 T-200 R=300	200	700	1200	300
KS100 T-300 R=300	300	800	1300	300
KS100 T-400 R=300	400	900	1400	300
KS100 T-500 R=300	500	1000	1500	300
KS100 T-600 R=300	600	1100	1600	300
KS100 T-200 R=400	200	985	1770	400
KS100 T-300 R=400	300	1085	1870	400
KS100 T-400 R=400	400	1185	1970	400
KS100 T-500 R=400	500	1285	2070	400
KS100 T-600 R=400	600	1385	2170	400

Product name	KS100 T-600 R=600 PG		
SKU	1478119		
Material	Steel		
Corrosivity category	C1-C2		
Color	Grey		
Sales unit	PCE		
Packing size	1 PCE		
Dimensions (mm) Width Height Length	2170	100	1385
Weight (kg/pce)	16,14		
GTIN	6438377119942		
Surface finish	Manufactured of hot-dip galvanized steel in accordance with standard EN 10346		

Dimension L (mm)	2170
Dimension A (mm)	600
Dimension B (mm)	1335
Radius R (mm)	600
CO2e/kg	2,61