


Fastener

RTF-S-10 XPG

The support for the legs of the ground-mounted solar panel system, also used as a roof mount. In the ground-mounted system, the RTF-S-10 is attached to the end of the C-profile acting as a leg to support the angled C-profile. In roof installation, the RTF-S-10 roof mount is attached to the AS or FP mounting rail on a sloped roof. The angle of the mounting rail is adjusted according to the roof slope. Attached with an M10 bolt.

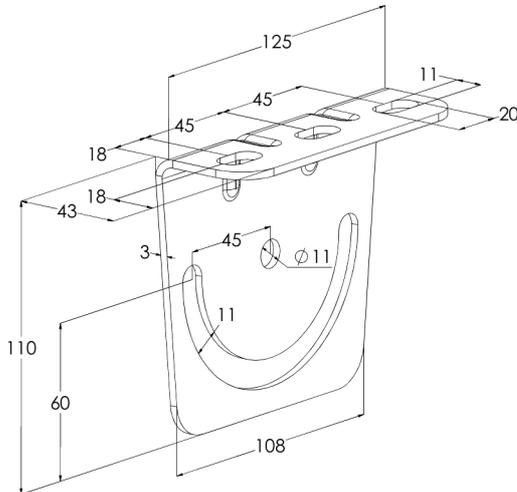

Product name	RTF-S-10 XPG		
SKU	1449638		
Material	Steel		
Corrosivity category	C1-C4		
Color	Grey		
Sales unit	PCE		
Packing size	1 PCE		
Dimensions (mm) Width Height Length	125	110	43
Weight (kg/pce)	0,46		
GTIN	6438377134808		
Surface finish	Manufactured of coated steel in accordance with standard EN 10346		

Material thickness (mm)	3
Loading capacity (kg)	250
CO2e/kg	2,72