

SEPARATOR

The installation is used for separating liquids from solid substances, in the sector of waste water.
The installation is completely sealed and therefore this working scentless.

Application

The unloading of trucks of sewer cleaning, cleaning of septic tanks, defibering of thickened sludge, etc...

Principle


The mixture of liquids / solids is pumped through a sieve. In the sieve is a screw conveyor placed that transports the waste to the output. The waste is compacted by an adjustable pressure cover.

Example

A truck of 12m³ is emptied in 5 minutes.

Option

- Longopack.
- Torque limiter

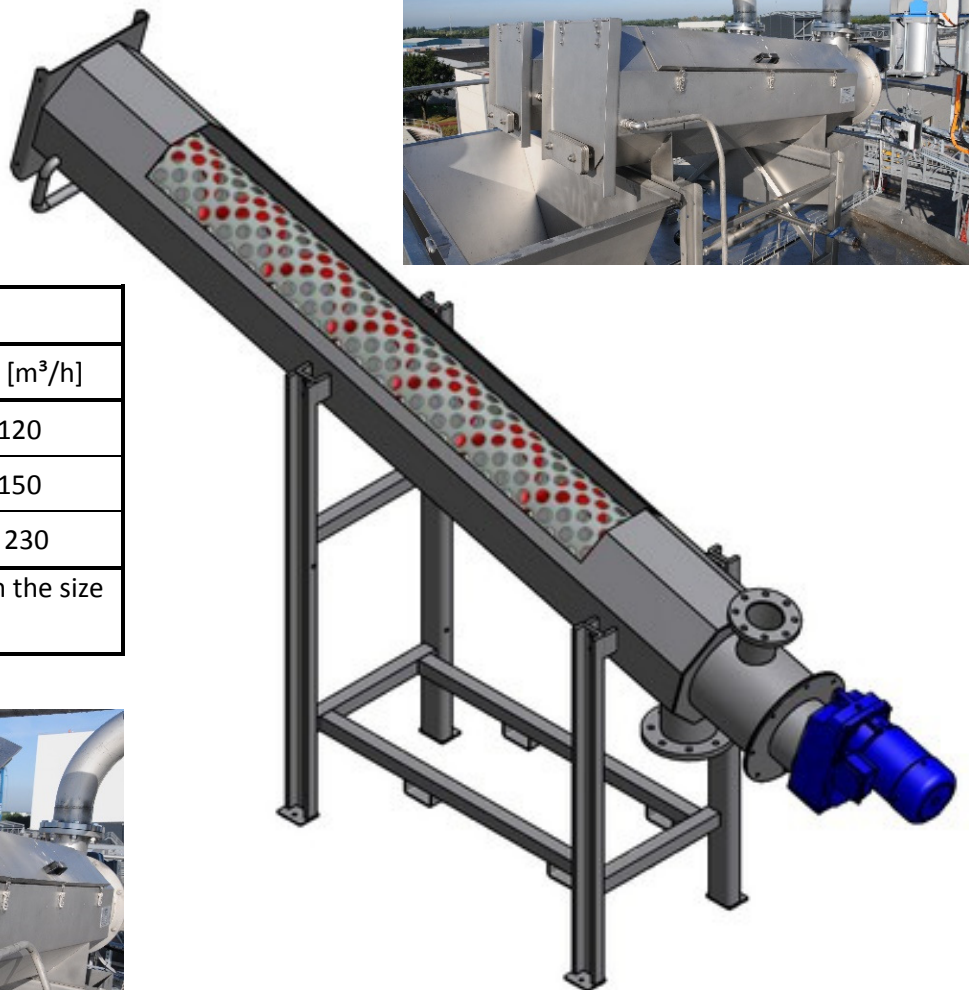

Models	
Type	Capacity [m ³ /h]
SEP 300	60 à 120
SEP 400	75 à 150
SEP 500	120 à 230
The capacity can vary depending on the size of the solids.	

