
DME-CVR13



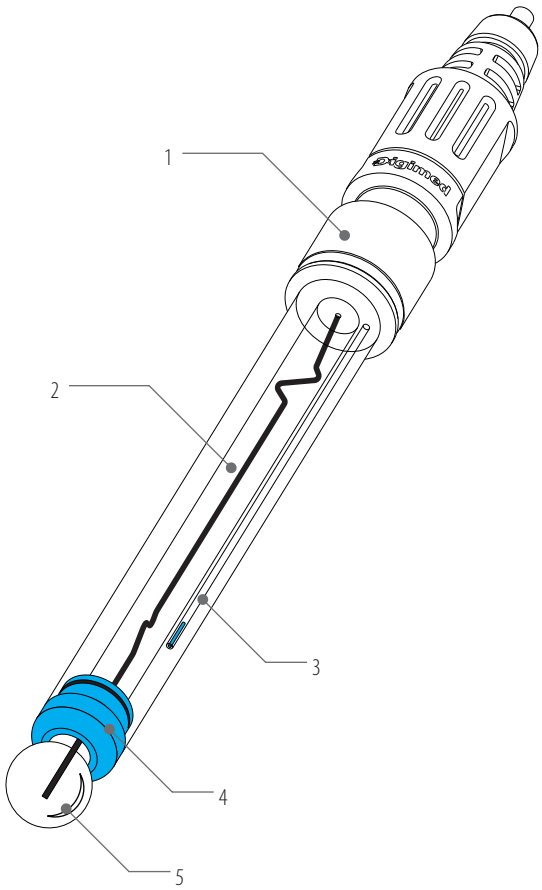

	DME-CVR13
pH	0 to 14
Temperature	0 to 100 ºC
Diaphragm	PTFE
Reference system	Ag/AgCl + Ionic barrier
Electrolyte	Diffusion type
Body length	108 / 120 / 270 / 225 / 320 mm
Body material	Glass
Thermo	-
Application	Very aggressive environments, high sulfate tenor and higher nominal temperature

Item	Description
1	Head
2	Measure electrode
3	Ionic barrier
4	PTFE reference diaphragm
5	Bulb

Optional connectors



DM-AS7 Connector for use in electrodes with S7 or S7H8 head

BNC Bayonet type connector, used in pH electrodes without thermo

MINI-DIN / **DM-DIN** Used in pH electrodes

PA Connector for use in electrodes or cells with IP-67 enclosure

Banana Connector diameter of 2 or 4mm , used in reference electrodes

Optional heads



K2 head with cable, used for aggressive applications

PRO head with an 6 pin connector for applications with electrodes or cells + thermo

S7H8 head with an 2 pin connector, with screw thread for direct installation in probes

S7 head with 2 pin connector, with removable cable for easy electrode removal.