


DILOG

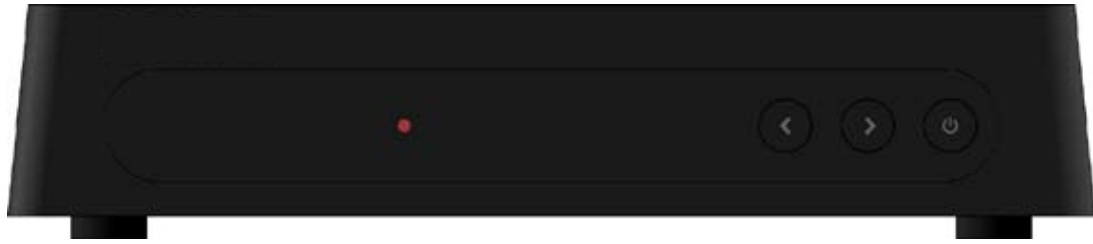

www.dilog.se

DILOG DC-235HD

- | | |
|----------------------------------------------------------------------------------------------------------------|---------------------------------------|
| • Media Playback (MP3, FLAC, JPG, JPEG, MPG, MPEG, VOB, AVI, TS, TRP, M2T M2TS, MP4, MKV, MOV, DIVX (Optional) | <i>Optional</i> |
| • Record through USB HDD | Yes |
| • Time shift through USB HDD | Yes |
| • 7 days EPG (Electronic Program Guide) | Yes |
| • Easy first installation | Yes |
| • Channel search with automatic / manual | Yes |
| • Favorite list editing for both radio and TV | Yes |
| • TV and radio list handling | Yes |
| • Parents lock | Yes |
| • DVB Subtitle | Yes |
| • Teletext VBI / OSD | Yes |
| • PAspect ratio handling | Yes |
| • Aspect ratio handling | Yes |
| • Timer Stting | Yes |
| • LCN | Yes |
| • Copy Protection | <i>HDMI 1.3 / HDCP 1.2 (Optional)</i> |
| • OTC Updrade | Yes |
| • CA | Yes |

Technical Specification

General

Marketing Area	World
Transponder	DVB-C
Power Voltage	AC 100-240V ~ 50/60Hz
Power Consumption	< 6 W
Standby Power Consumption	< 1 W

System

Demodulator	Sony CXD2837
DDR III	128M Byte
FLASH Size	8M Byte

Decode

Video decoder	MPEG-2 MP@HL, AVC/ h.264HP@L4.1, MPEG4 ASP Supported
Audio decoder	AAC / AC3 / PCM
Video output ratio	4:3 / 16:9 / Auto
Video resolution	1920 * 1080

Tuner & Channel

RF Input Connector	IEC FEMALE
Receiving Channel Range	47 ~ 862 MHz
Modulation	QPSK / 16QAM / 64QAM / 256QAM
Band Width	6/7/8MHz

Terminal

CVBS/ R/ L	Yes
Coaxial Output	Yes
HDMI (576P/720P/1080i/ 1080P)Output	Yes
USB 2.0	Yes

Front Panel

Display Type	No
Front Panel Keyboard	Optional
Infra-red receiver	Yes
Power Indicator (LED)	Yes

Accessory

Remote control with battery	Yes
HDMI Cable	Optional
AV Cable	Optional
IB, and Warranty Card	Yes
Adapter, 12V / 1A	Yes

Dimensions

Body Size	W145 x D100 x H28mm
Packing Size	W x D x H mm
Net Weight	0.8 Kg

DILOG

Dilog Nordic AB
Magasinsgatan 35, 434 37 Kungsbacka
Sweden

Tel: +46 31 28 88 30
www.dilog.se