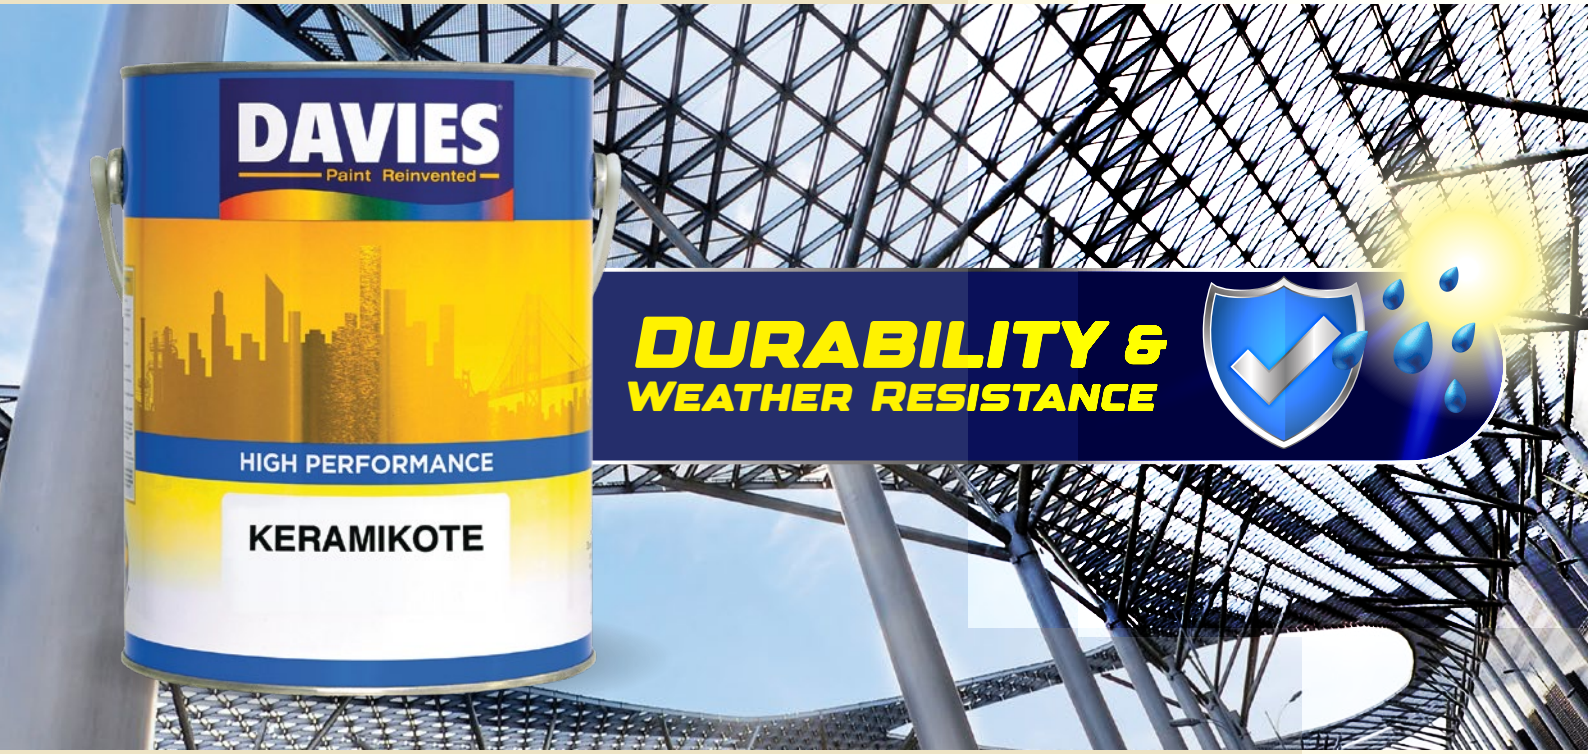


DAVIES® Keramikote™ is a two component, air drying, chemically-cured acrylic polyurethane coating which provides durability and weather resistance. It safely and effectively shields exposed facades from the elements and various forms of pollution so that coatings look better and last longer.

FEATURES

- Outstanding Weather Resistance
- Optimum Chemical and Mechanical Properties
- High Water - Penetration Resistance
- Superb Aesthetic Value
- Protection Against Carbonation

SPECIFICATION

PAINT TYPE
Acrylic-Polyurethane

PAINT FINISH
Gloss,
Semi-gloss

COLOR
Available in KM-1000 Gloss White
KM-2000 Semi-gloss White &
KM-1030 Gloss Clear

NON-VOLATILE
45%

PRACTICAL COVERAGE
30-35 sqm/4L/coat
coat depending
on surface porosity

PACK SIZE
4L set

CLEAN-UP
DAVIES® Keramikote™
Reducer

SHELF LIFE
1 Year when stored
in dry and cool
conditions

APPLICATION TOOLS
Brush/Roller/Spray

DRYING TIME
Drying Time : 2 hours
Recoating Interval : 1-2 hours

THINNING/DILUTION
Use AS IS; if necessary, dilute with not more than 5% Reducer per 4L for Brush/Roller Application

Spray Application
Dilute with not more than 15% Reducer per 4L

MIXING RATIO
For KM-1000
3.40 volume parts : 0.60 volume part
Gloss Base Gloss Hardener

For KM-2000
3.50 volume parts : 0.50 volume part
Semi-gloss Base Semi-gloss Hardener

RECOMMENDED DFT
45 - 50 microns
per coat

SURFACE PREPARATION


A. New Concrete

- All surfaces must be clean, dry, free from dust, dirt, chalk, laitance,efflorescence, rust, grease, oil and other foreign materials.

RECOMMENDED USES


CONCRETE


WOOD

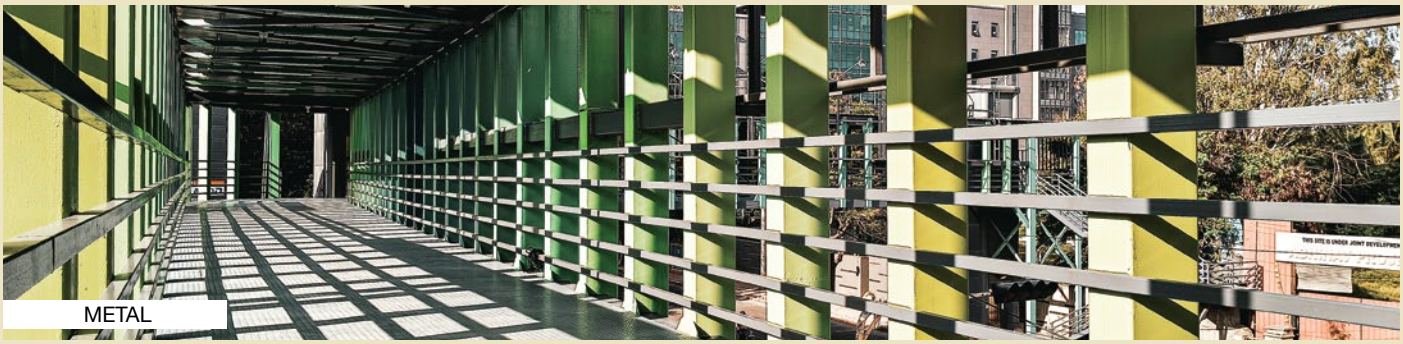
METAL

PAINTING SYSTEM

A. Concrete Surfaces

	No. of Coats	Product
Primer/Sealer	**1**	**DAVIES® KM-90-25 Keramikote™ Penetrating Sealer**
Putty	**as needed**	**DAVIES® EPP-100 Epopatch™**
Primer	**1**	**DAVIES® KM-7000 Keramikote™ Undercoat Primer**
Topcoat	**2**	**DAVIES® Keramikote™ Topcoat**

B. Wood Surfaces

	No. of Coats	Product
Primer	**1**	**DAVIES® KM-7000 Keramikote™ Undercoat Primer**
Topcoat	**2**	**DAVIES® Keramikote™ Topcoat**

C. Metal Surfaces

	No. of Coats	Product
Primer	**1**	**DAVIES® Epoxy Primer**
Topcoat	**2**	**DAVIES® Keramikote™ Topcoat**

STORAGE AND HANDLING

- Keep container closed when not in use.
- Store in a cool, dry and well-ventilated space.
- Do not transfer contents to other containers for storage.
- In case of spillage absorb with inert materials such as sand.