




8" Deck Mount Faucet w/ 6" Swivel Gooseneck Spout and Aluminum Side Sprayer with Lever Handles

ENGINEERING SPECIFICATION:

Polished, chrome-plated cast brass faucet with 8" inlet centers and quarter turn compression cartridges w/inline check valves. 6" swivel gooseneck spout with a 6.0 GPM [27.3 L/m] wide rose spray (full stream bubbler included). Faucet comes with diverter assembly which allows water to be redirected from the spout to the spray hose automatically. Lever handles are color coded and are treated with SANIGUARD® treatment. 96" long stainless steel clad flexible hose with Santoprene reinforced inner hose with stainless steel strain relief and O-ring seals (patented). Aluminum angled spray head has standard full spray pattern with Grip handle. Mounting hardware is supplied for standard lavatory risers.

TECHNICAL/PERFORMANCE SPECIFICATIONS:

Commercial Specification Grade
Gaskets and Seals Rated Commercial Hot 180°F
1/2" NPS Male Inlet w/ 1/2" tube compression seals & nuts
Operating Temperature: 40 - 180°F
Operating Pressure: 15 - 125psi

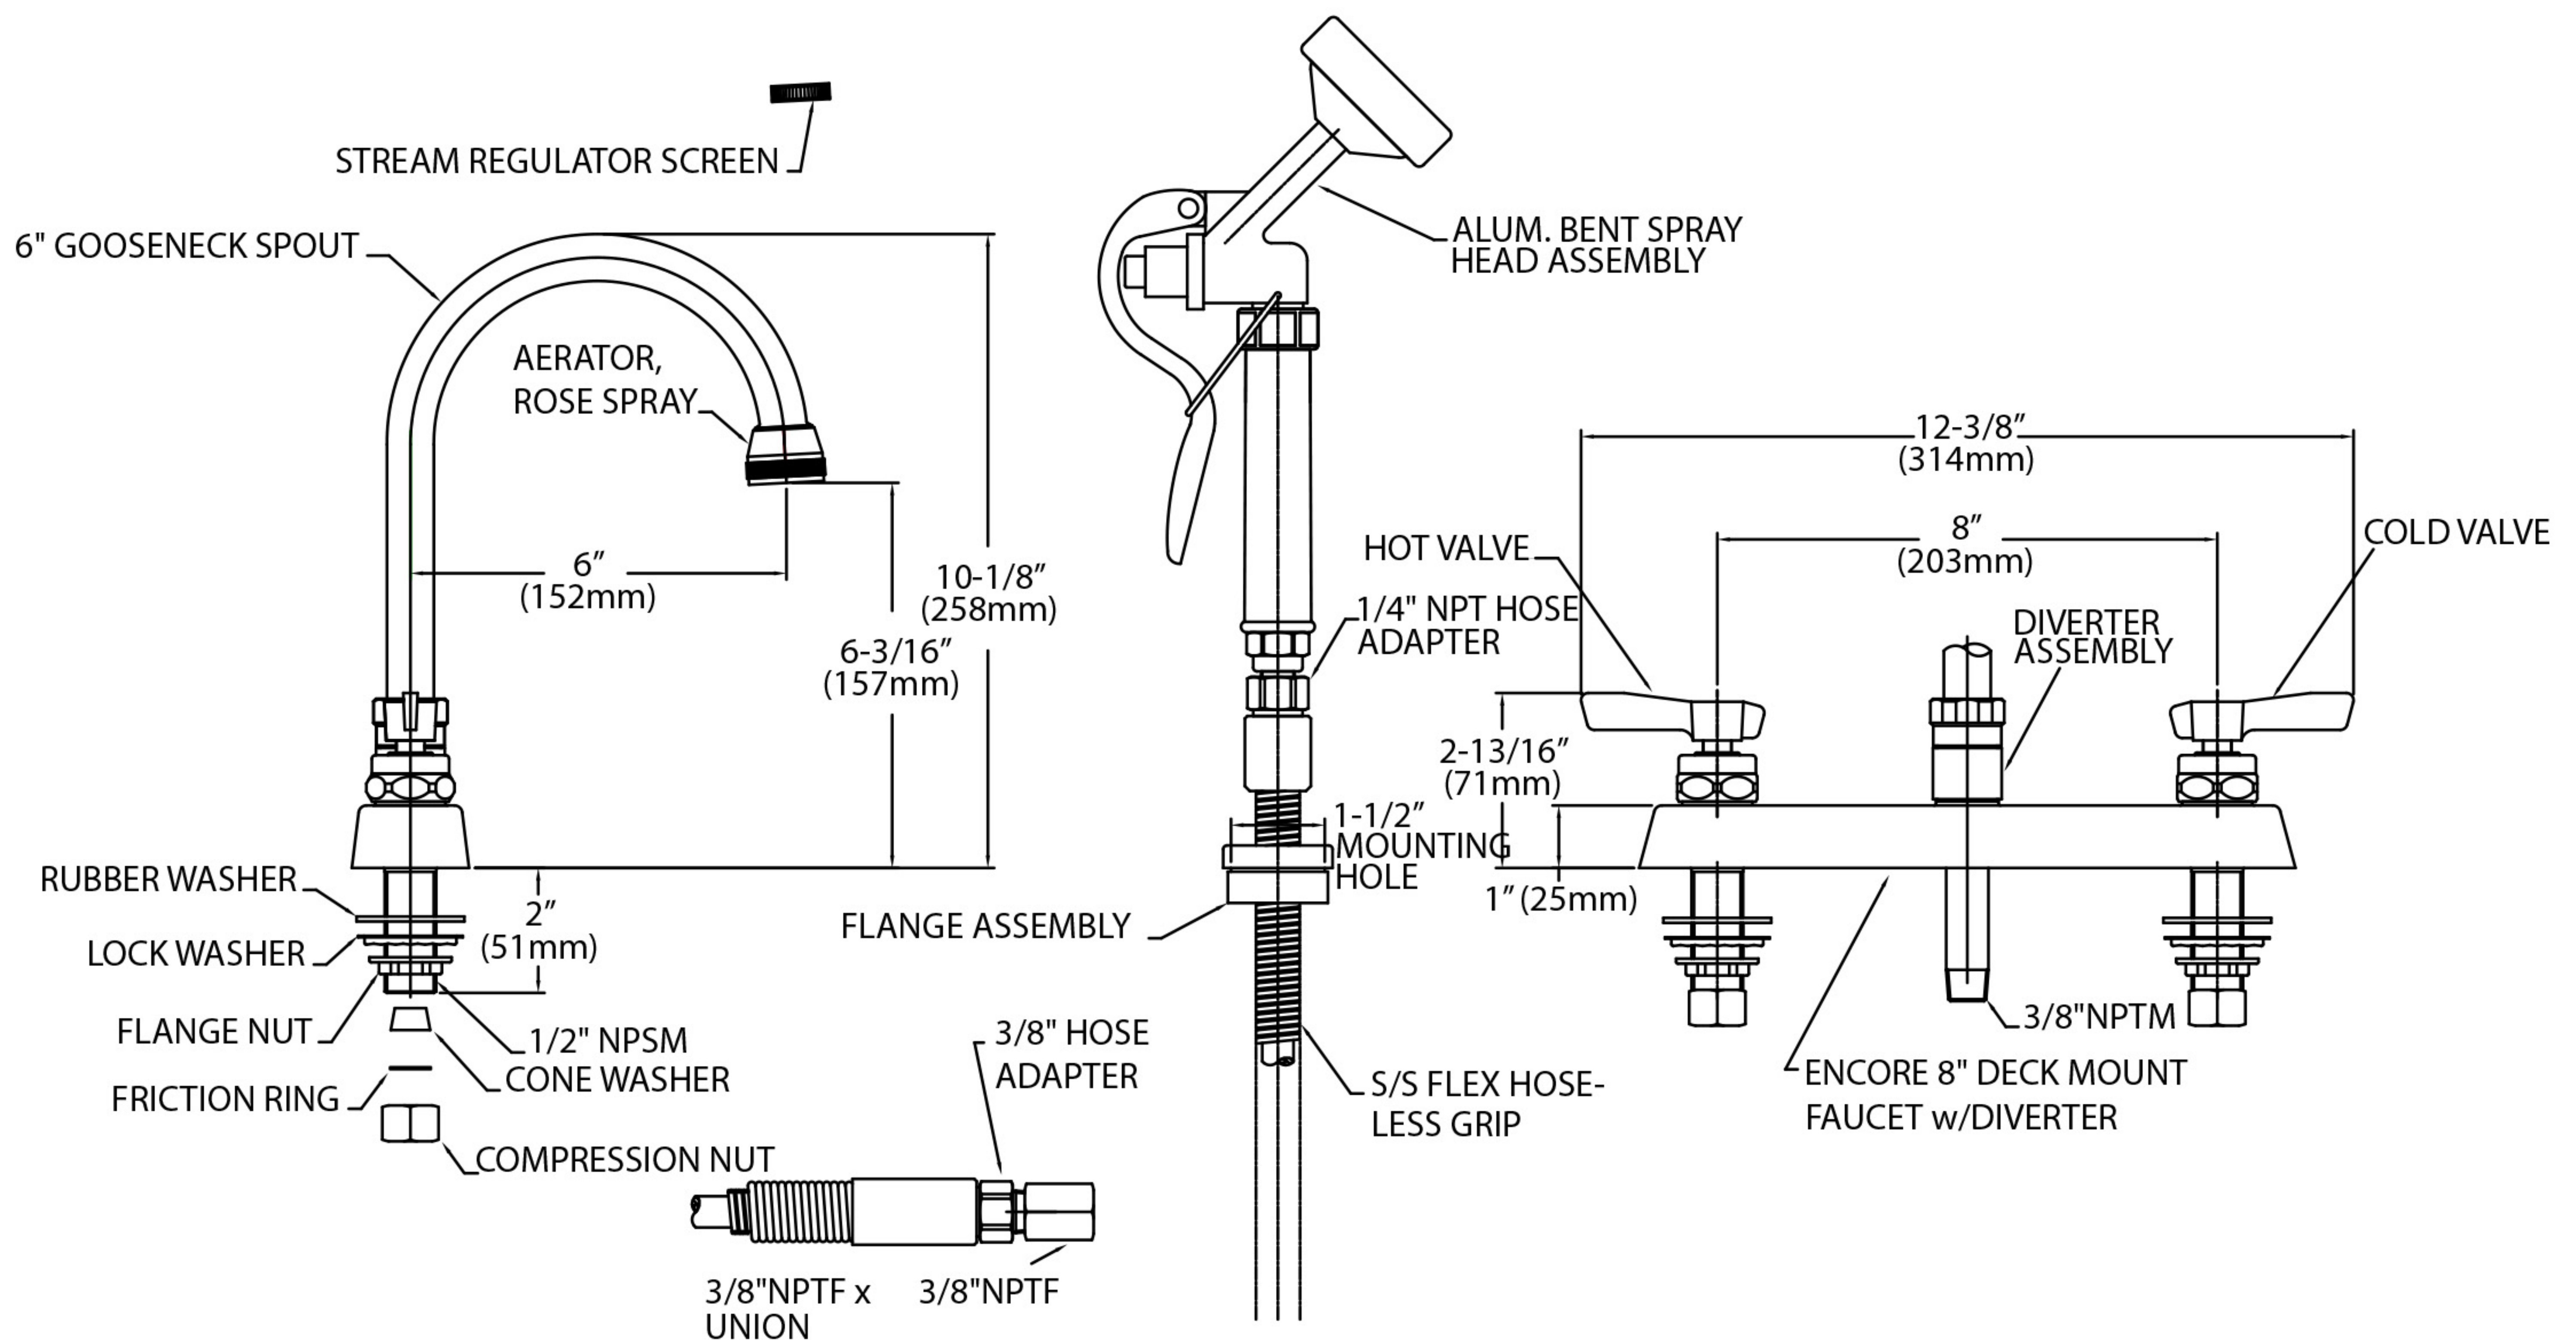

Dimensions shown in inches (mm) are for reference only and are subject to change.