



AIRSTAR

SIROCCO 2-S

2 x 250 W HA 24v

#professional lighting



MAIN FEATURES

Self-inflating lighting balloon

Powerful and reliable lighting

Small size

STRENGTHS

Compact and lightweight

Very low voltage use

Quick and easy set up in 5 min

APPLICATIONS

Industrial maintenance

Small construction and road works

Logistical lighting

Security lighting

Rescue teams


SIROCCO 2-S

2 x 250 W HA 24v



LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	850 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	185 m ²
Light under the balloon (2 m high)	145 lx
Maximum lumen	18 000 lm
Colour temperature	WARM

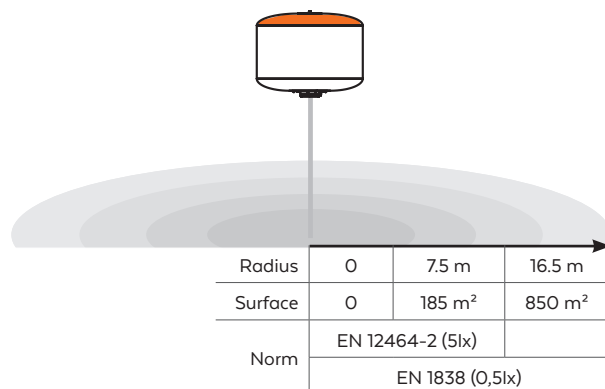

How to read the drawing : In a range of 16.5 meters, being a surface of 850 m², we guarantee a lighting in accordance with the EN1838 standard

TECHNICAL DATA


Lamps	2 x 250 W halogen
Average lamps life*	300 h
Efficiency	36 lm/W
Type of lamp socket	G6.35
Maximum power	500 W
Available voltage	24 v AC/DC
Power supply	24 v 500 VA current transformer or 24 v battery or on-board 24 v generator
Envelope options	multiple envelope colours, without reflector or with reverse reflector

*Under normal conditions of use

SAFETY

Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP53


DIMENSIONS & PACKAGING

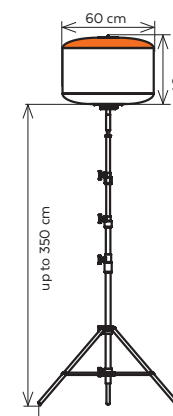

P350TA

Metal storage box (integrated handle)

Total weight without stand	8 kg
----------------------------	------

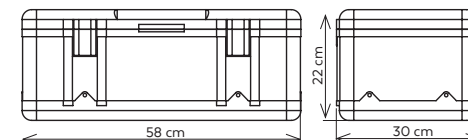

Full set lighting balloon with one repair patch kit, one user manual and one glove, all in a metal box, stand separately

