

aIRSTAR

SIROCCO 2-M
1 x 1200 W HMI
#professional lighting



MAIN FEATURES

Self-inflating lighting balloon
Safety lighting
Medium size

STRENGTHS

Daylight
Powerful light source
Hot restrike

APPLICATIONS

Industrial maintenance
Road works
Construction sites
Rescue teams


SIROCCO 2-M

1 x 1200 W HMI



LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	4 700 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	870 m ²
Light under the balloon (3 m high)	780 lx
Maximum lumen	110 000 lm
Colour temperature: DAYLIGHT	5 500°K - 6 500°K

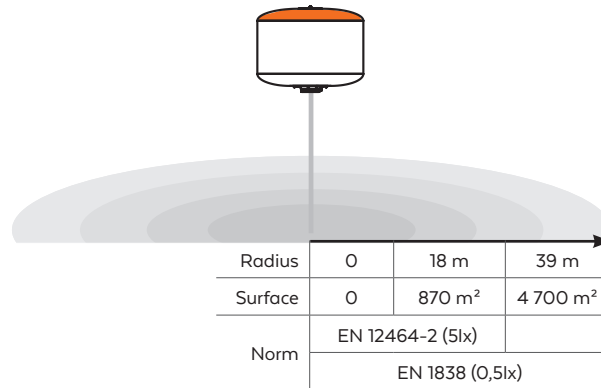

How to read the drawing : In a range of 39 m, being a surface of 4 700 m², we guarantee a lighting in accordance with the standard EN1838

TECHNICAL DATA

Lamps	1 x 1200 W HMI
Average lamps life*	750 h
Efficiency	92 lm/W
Type of lamp socket	G38
Maximum power	1300 W
Available voltage	220 ~ 240 V / 50 Hz
Restrike time	Instant
Main power supply or 2 kVA generator	
Envelope options: multiple envelope colours, without reflector or with reverse reflector	

*Under normal conditions of use


SAFETY

Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP54
Integrated pressure sensor and anti-vibration system	
Wind resistance	100 km/h

DIMENSIONS & PACKAGING


PVC cylinder case

Total weight without stand	14 kg
Net weight balloon only	11 kg
Ballast	20 kg

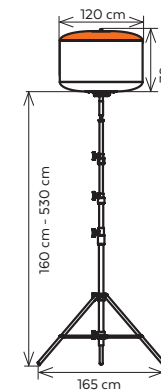

P500TA stand

PVC cylinder case

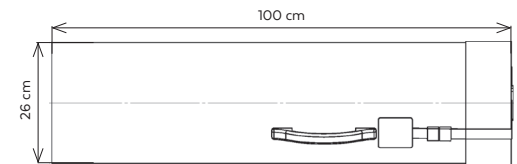

Full set lighting balloon with one lamp, one repair patch kit, one user manual and one glove in a PVC cylinder case

