

aIRSTAR

SIROCCO 2-M
4 x 150 W HI-CR
#professional lighting



MAIN FEATURES

- Self-inflating lighting balloon
- Safety lighting
- Medium size
- On stand or on cart

STRENGTHS

- Mobile thanks to integrated ballasts
- Powerful
- Multilamps

APPLICATIONS

- Road maintenance
- Construction sites
- Rescue teams
- Safety lighting


SIROCCO 2-M

4 x 150 W HI-CR



LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	3 250 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	650 m ²
Light under the balloon (5 m high)	235 lx
Maximum lumen	58 000 lm
Colour temperature	NEUTRAL

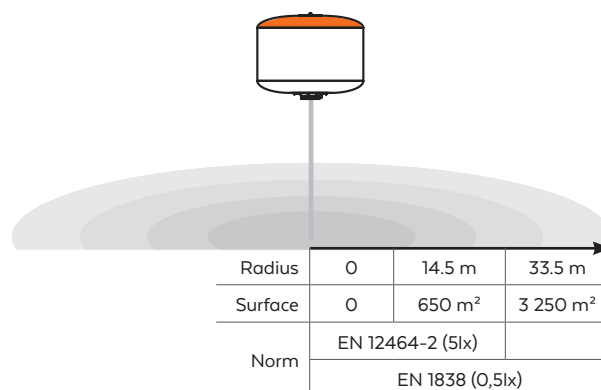

How to read the drawing : In a range of 33.5 m, being a surface of 3 250 m², we guarantee a lighting in accordance with the standard EN1838

TECHNICAL DATA

Lamps	4 x 150 W HI EP or M102
Average lamps life*	12 000 h
Efficiency	97 lm/W
Type of lamp socket	E27 or E26 medium base
Maximum power	690 W
Available voltage	100-120 V or 220-240 V / 50-60 Hz
Ballasts	4 x 150 W integrated for increased mobility
Restrike time	~ 7 min
Required generator	1 kVA generator

Envelope options: multiple envelope colours, without reflector or with reverse reflector

*Under normal conditions of use


SAFETY

Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP54
Anti-vibration system	
Integrated temperature sensor for security	


DIMENSIONS & PACKAGING

PVC Cylinder case

Total weight without stand	9.5 kg
----------------------------	--------

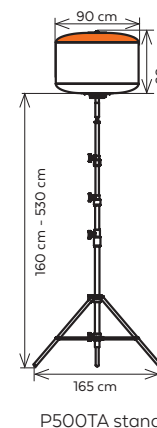

PVC cylinder case

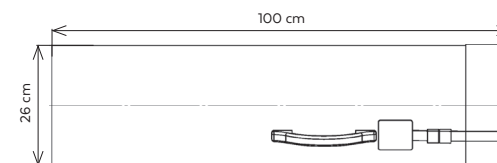

Full set lighting balloon with one repair patch kit, one user manual and one glove in a PVC cylinder case

