

SIROCCO 2-M
2 x 1000 W HA
#professional lighting



MAIN FEATURES

Self-inflating lighting balloon
Safety lighting
Medium size

STRENGTHS

Reliable
User friendly
On-board or stationary
Multilamps

APPLICATIONS

Industrial maintenance
Road works
Rescue


SIROCCO 2-M

2 x 1000 W HA



LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	3 250 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	650 m ²
Light under the balloon (2.5 m high)	400 lx
Maximum lumen	54 000 lm
Colour temperature: WARM	2 700°K - 3300°K

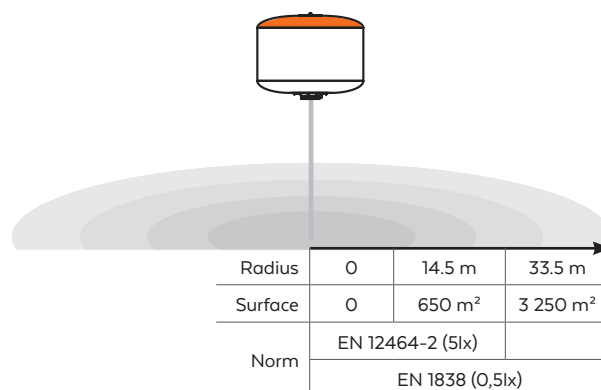

How to read the drawing : In a range of 33.5 m, being a surface of 3 250 m², we guarantee a lighting in accordance with the standard EN1838

TECHNICAL DATA

Lamps	2 x 1000 W HA
Average lamps life*	300 h
Efficiency	27 lm/W
Type of lamp socket	R7S
Maximum power	2000 W
Available voltage	100-240 V / 50-60 Hz
Restrike time	Instant

Main power supply or 3 kVA generator

Envelope options: multiple envelope colours, without reflector or with reverse reflector

*Under normal conditions of use

SAFETY

Flame-retardant fabric


Silver reflector to improve highlight luminance below the balloon and avoid light pollution

Rain and dust proof material	IP54
Maximum ambient temperature	45°C
Electrical protection	Integrated fuse + breaker
Envelope	Pressure sensor
Wind resistance	100 km/h

DIMENSIONS & PACKAGING


PVC Cylinder case

Total weight without stand	11 kg
Net weight balloon only	8 kg

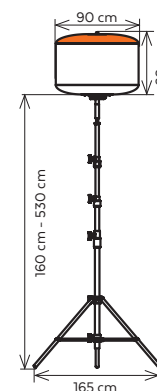

P500TA stand

PVC cylinder case

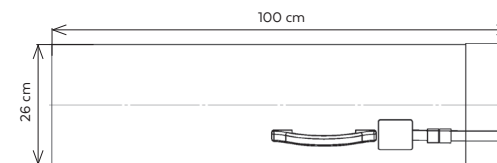

Full set lighting balloon with one repair patch kit, one user manual and one glove in a PVC cylinder case

