

aIRSTAR

SIROCCO 2-S

3 x 205 W HA

#professionnal lighting



MAIN FEATURES

Self-inflating lighting balloon

Safety lighting

Small size

STRENGTHS

Compact and lightweight

Good power-to-size ratio

Resistance of the structure

APPLICATIONS

Industrial maintenance

Small construction sites

Rescue teams

Security lighting


SIROCCO 2-S

3 x 205 W HA



LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	650 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	140 m ²
Light under the balloon (3 m high)	105 lx
Maximum lumen	12 600 lm
Colour temperature	WARM

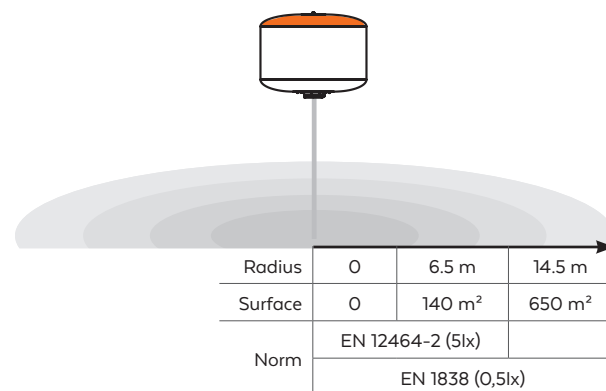

How to read the drawing : In a range of 14.5 m, being a surface of 650 m², we guarantee a lighting in accordance with the EN1838 standard.

TECHNICAL DATA


Lamps	3 x 205 W HA
Average lamps life*	2000 h
Efficiency	20 lm/W
Type of lamp socket	E27
Maximum power	650 W
Available voltage	100 - 120 - 230 v 50-60 Hz
Envelope options	multiple envelope colours, without reflector or with reverse reflector

*Under normal conditions of use

SAFETY


Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP54

DIMENSIONS & PACKAGING

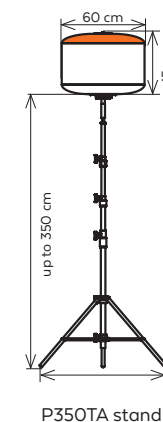

Metal storage box (integrated handle)

Total weight without stand	8 kg
----------------------------	------

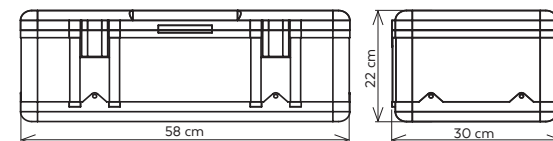

Full set lighting balloon, envelope with reflector, patch kit, manual, 1 battery with charger and glove, all in a metal box

