

Eastern OptX Propagation Path Simulators

Bring the Test Range to Your Test Bench



Product Summary

Introduction

The EOX Series 1000, 3000, and 6000 Delay Line Systems offer outstanding accuracy, reliability, and flexibility. EOX provides easily configurable systems that can be tailored to specific applications. This is the EOX difference. Starting with one of the standard EOX systems we can implement the many standard options to solve your specific test problems quickly, and economically. Software provided for remote operation is user friendly and configurable.

Standard EOX Systems

- Series 1000 Single Delay Line
- Series 3000 Multiple Delay Lines
- Series 6000 Altimeter Test Set

Standard System Options (Varies with Series Type)

- Number of Delays (8 max in a single unit)
- Delay Size (up to 250 us, longer delays possible)
- Delay Configurations: Discrete, Progressive, or Combined Discrete and Progressive.
- Amplitude Control — Optical and/or RF
- Remote Control Interface
- RF Connector Type
- Front Panel Control Type — Rotary Switch, LCD Touch Screen, Keypad, Toggle
- Switching Speed
- Power Meter
- Signal Delay Bypass
- External Delay
- Frequency Counter
- Travel Case

Eastern OptX, Inc.

710 E. Main Street • Moorestown, NJ 08057 • 877 870 6789 • 856-231-9022 (fax)


DS-0008 REV1

EOX 1
EASTERN OptX, Inc.


Product Details

Parameter	Specification	Notes
Frequency Range	0.1 — 18 GHz	Narrower ranges standard
Accuracy	1 %	Optional 0.1%
Repeatability	0.01%	At constant temperature
System RF Gain	6 dB	Typical, 50 us delay @ 5 GHz
VSWR	2 : 1	Maximum
Spurious Free Dynamic	100 dB/Hz ^{2/3}	Minimum
1 dB Input Compression	-15 dBm	Minimum
Noise Figure	25 dB	Maximum (Lower NF optional)
Input/Output Impedance	50 Ω	Nominal
Dimensions	19" Rack Per EIA-310-D	2U—5U, 18" - 22" depending on design

Delay Configuration Options:

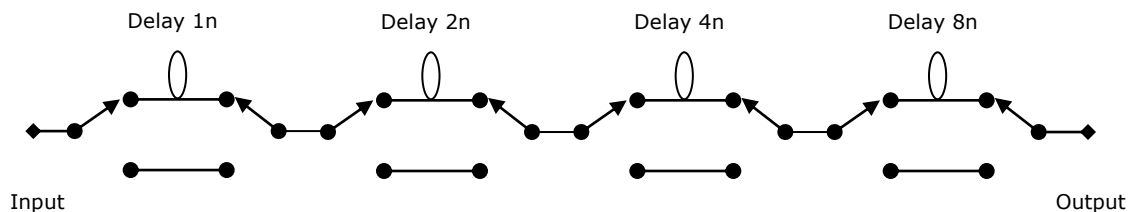

Progressive Delay Configuration

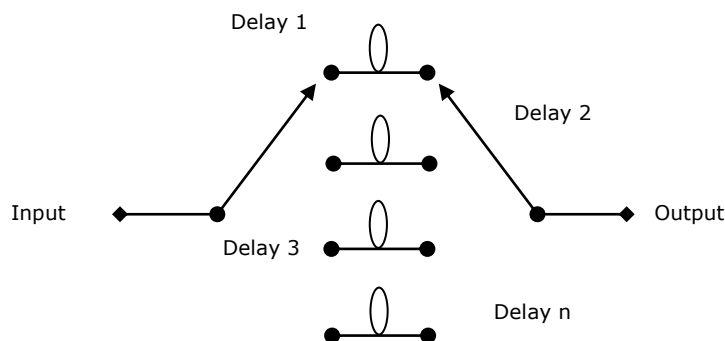

Discrete Delay Configuration

Progressive:

- Best solution for equally spaced delay step sizes
- Numerous possible delay combinations (Binary: 1, 2, 4, 8 etc.)
- More delays in a smaller package
- 1% to 3.5% overall accuracy.

Discrete:

- Best solution for few delays or unequal delay steps sizes.
- One to eight delays typical
- Better than 0.1% accuracy possible.


Eastern OptX, Inc.

710 E. Main Street • Moorestown, NJ 08057 • 877 870 6789 • 856-231-9022 (fax)

www.eastern-optx.com. sales@eastern-optx.com

DS-0008 REV1

Ordering Information 3000 Series

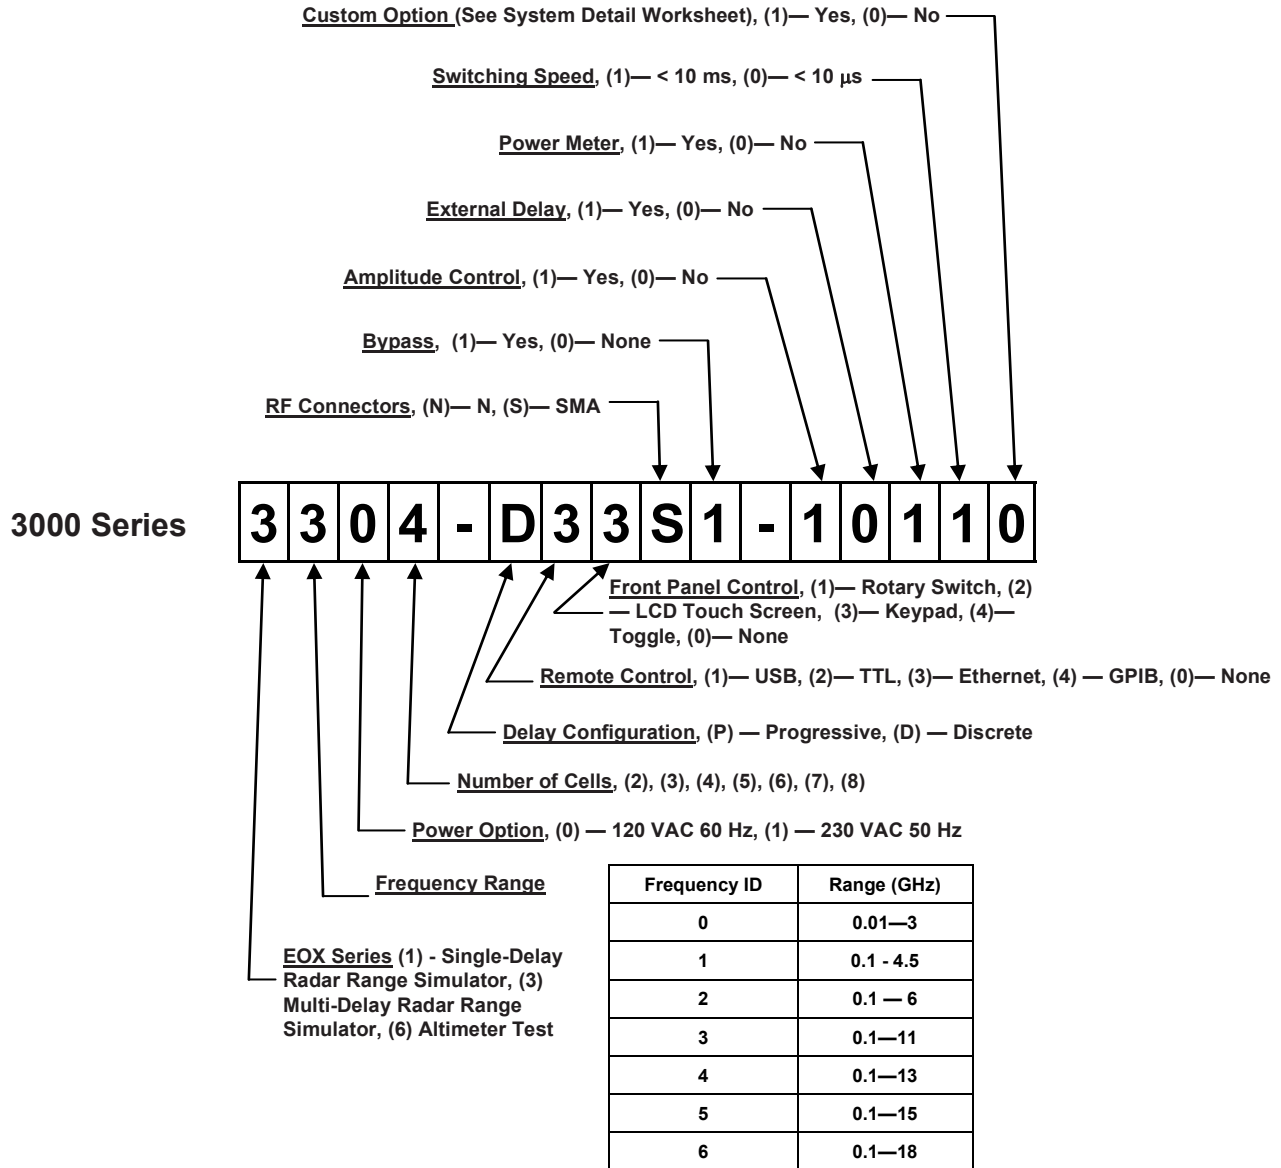



Eastern OptX, Inc.

710 E. Main Street • Moorestown, NJ 08057 • 877 870 6789 • 856-231-9022 (fax)

www.eastern-optx.com. sales@eastern-optx.com

DS-0008 REV1

Ordering Information 1000 and 6000 Series

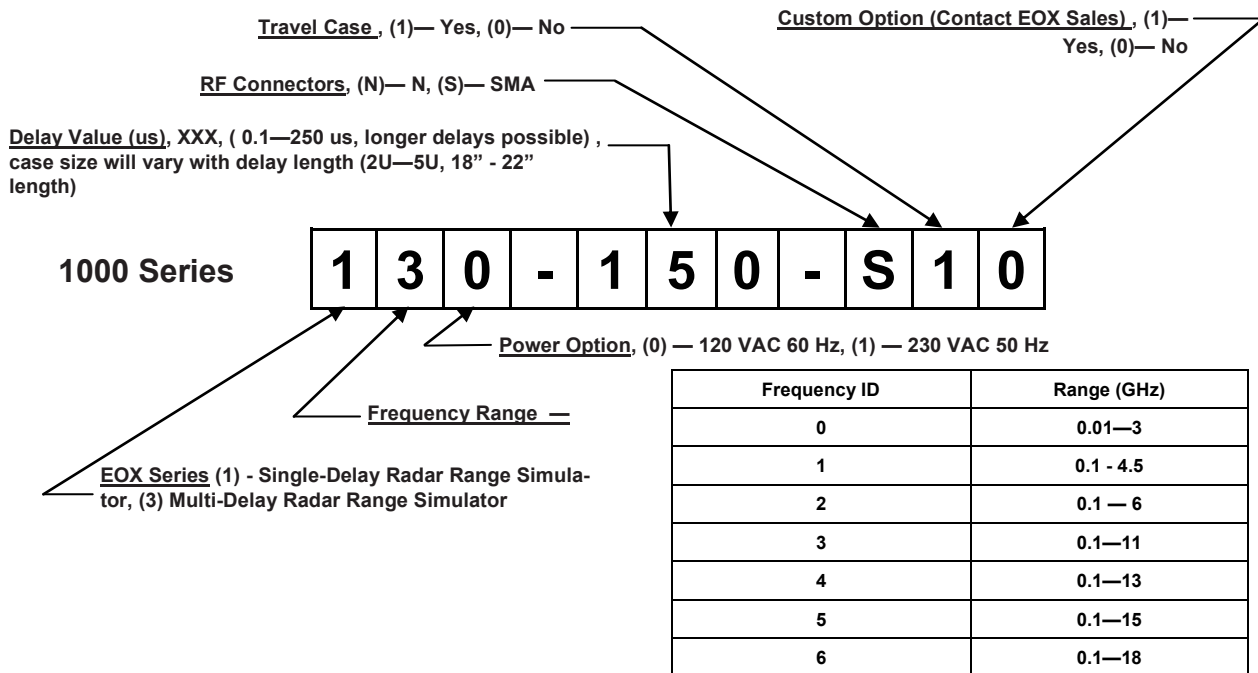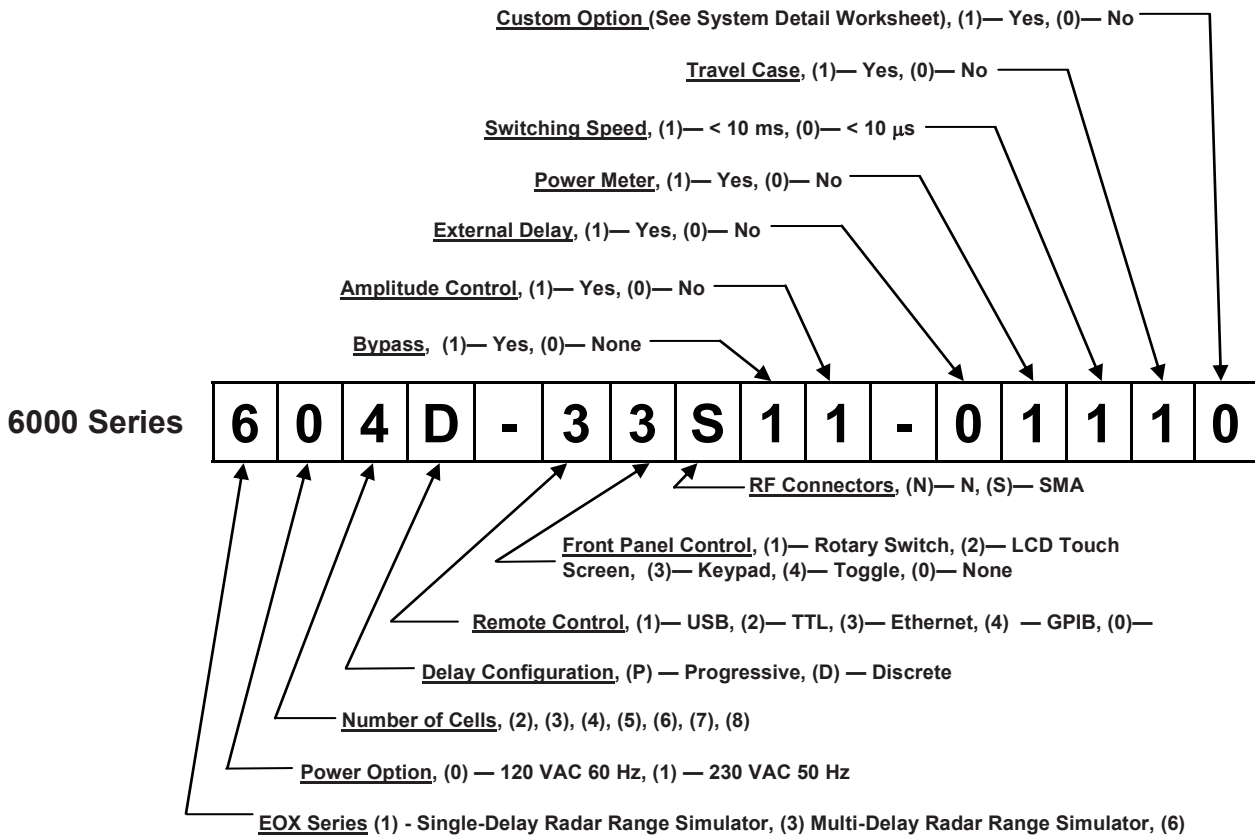

Eastern OptX, Inc.

710 E. Main Street • Moorestown, NJ 08057 • 877 870 6789 • 856-231-9022 (fax)

www.eastern-optx.com. sales@eastern-optx.com