

BS 336 Instantaneous Blank Cap & Chain

On land, the plastic Instantaneous caps are frequently used to cover dry riser and landing valve openings.

At sea, the brass instantaneous covers are used flanged valves.

Covers are used to prevent rain water, pests or debris from accidentally entering the pipeline.



Information

Made according to BS 336 with rust resistant brass alloy.


Used in Singapore Fire Service

Manufactured to:

British Standard 336:2010
Specifications for fire hose couplings and ancillary equipment

Also known as:

BS Coupling, BS 336 Coupling, British Standard Coupling, Instantaneous Coupling

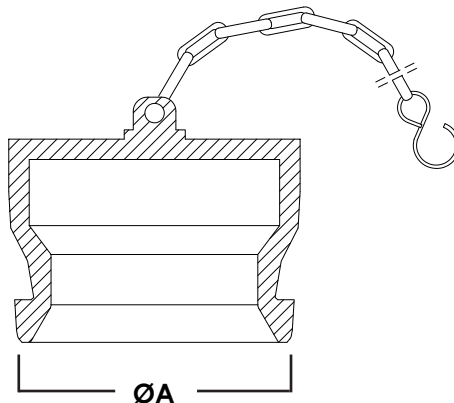

DESCRIPTION	ØA	MATERIAL	PART NO
1.5" INST BS CAP	1.5" Connection	PLASTIC	HYCAP-G-BS15PL
2.0" INST BS CAP	2.0" Connection	PLASTIC	HYCAP-G-BS20PL
2.5" INST BS CAP	2.5" Connection	PLASTIC	HYCAP-G-BS25PL
1.5" INST BS CAP	1.5" Connection	BRASS	HYCAP-G-BS15
2.0" INST BS CAP	2.0" Connection	BRASS	HYCAP-G-BS20
2.5" INST BS CAP	2.5" Connection	BRASS	HYCAP-G-BS25