

Datasheet

RS PRO UL1015 Blue, 0.52 mm² Hook Up Wire, 100m

Stock No: 2075283



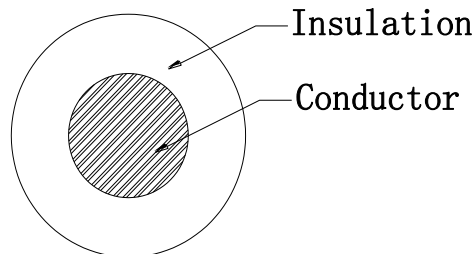
Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	20AWG
Construction(± 0.008 mm)	10/0.254
Stranded Dia.(mm)	0.94
Insulation Material	PVC
Insulation Color	Blue (RAL5019)
Ave Thickness(mm)	0.81
Min Thickness(mm)	0.65
Insulation Dia.(± 0.15 mm)	2.56

Features & Benefits:

- **Rated temperature: 105 °C**
- **Conductor resistance(20°C Ω/km): 36.9Max.**
- **Insulation DC Resistance(20°C MΩ*Km): 200Min.**
- **Rated Voltage: 600V**

Cross Section drawings



Cable Marking: E254881  AWM STYLE 1015 20AWG
105°C 600V VW-1  AWM I A 105°C 600V FT1 -LF- -F-
ELETECK

Applications: It is designed for general applications, for internal appliance wiring