


# **FEATURES**

- Excellent UV
  resistance
- Flame retardant
- Suitable for a multitude of uses
- Easy to thread and install
- Ideal for use outdoors

# RS PRO Black Nylon Cable Tie, 380mm x 7.6 mm

RS Stock No.: 811-1509

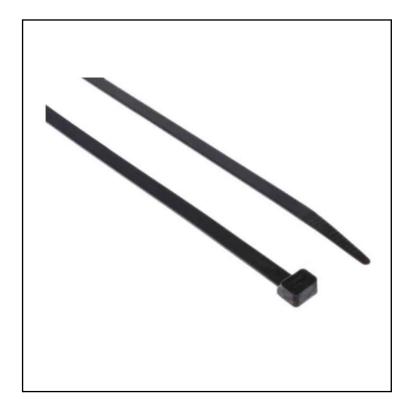

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



**Product Description** 

RS PRO cable ties are a type of fastener used for holding items together, most commonly electrical cables or wires. These cable ties are made from Nylon 66 (also known as nylon 6.6) and are weather resistant so can be used in outdoor applications. These ties are a one-piece, self-locking fastener and function like straps to keep cables tidy. They are available in a range of sizes..

## **General Specifications**

Туре	Non-Releasable			
Colour	Black			
Material	Nylon66			
Application	Bundling wire together, applications in industries such as: Cable management, Home/DIY, Garden			
Resistant To	Ultraviolet resistance			
UV Resistant	Yes			
Minimum Operating Temperature	40°C			
Maximum Operating Temperature	85°C			
Fire Behaviour	Flame Retardant			
Quantity	100			

### **Mechanical Specifications**


Length	380mm
Width	7.6mm
Tensile Strength	539N
Maximum Bundle Strength	105mm


#### **Approvals**

Standards Met

UL 94V-2, UL94V-2



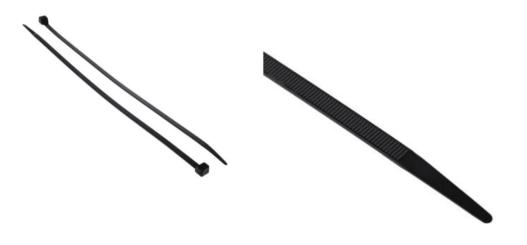

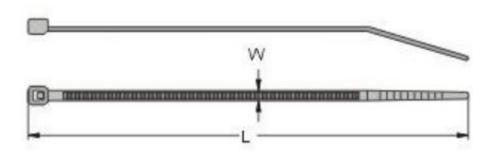

		Unit : mm						
Item No.	Length L		Width W	Max. Bundle Dia.	Min Loop Tensile Strength		packing	
	mm	inch			lbs	kgs		
8111482	100	4"	2.5	22	18	8		
8111486	142	<b>5</b> 1/2"	3.2	34	40	18		
8111495	190	7 1/2"	4.8	49	50	22		
8111498	203	8"	4.6	52	50	22		
8111518	240	9 7/16"	7.6	61	120	55		
8111505	300	11 7/8"	4.8	83	50	22		
8111511	300	11 7/8"	7.6	80	120	55	100PC/BG	
8111509	380	15"	7.6	105	120	55		
8111492	385	15 3/16"	4.8	110	50	22		
8111502	450	17 3/4"	4.8	131	50	22		
8111515	450	<b>17</b> 3/4"	8	128	120	55		
8111524	610	24"	9	177	175	80		
8111527	750	29 1/2"	7.5	223	120	55		