



Datasheet

RS PRO 3m D9 Way Female to D25 Way Male Serial Cable

Stock number: 182-8920


EN

Our RS PRO 3m D9 female to D25 male has a grey PVC cable flex.

The connector hoods are made from grey PVC and have a strain relief on the end of the hood to support the cable and to stop the cable from splitting around the hood.

The cable flex has an outer diameter of 5mm and 26awg, the connectors have gold flash pins to help stop corrosion.

The cable can be used to connect a PC to a DCE (data circuit-terminating equipment) such as a modem.

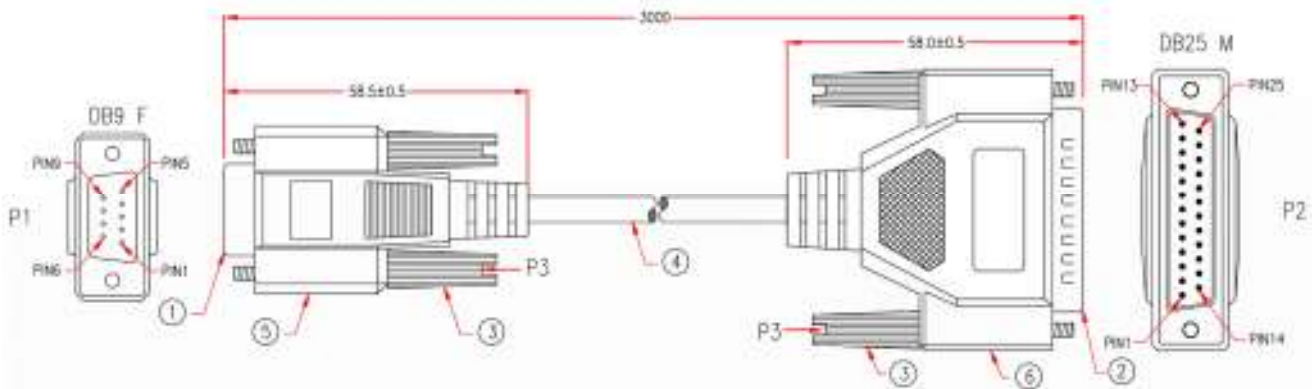

P1	P2
1	8 BROWN
2	2 RED
3	3 ORANGE
5	7 YELLOW
6	20 BLACK
8	
SHIELD	SHIELD

6	BLACK PVC TUBE $\varnothing 3.0 \times 30\text{mm}$
	ALUMINUM FOIL 33 \times 110mm
	MOLDED PE COLOR TRANSPARENT
	MOLDED PVC BEIGE
5	BLACK PVC TUBE $\varnothing 3.0 \times 22\text{mm}$
	Jumper Wire 1818N1/28/1C x 20mm, 0.015mm, COLOR WHITE, DRIVING NLEH002B1C-01
	ALUMINUM FOIL 33 \times 65mm
	MOLDED PE COLOR TRANSPARENT
	MOLDED PVC BEIGE
4	NON-UL 5C 26AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2605C-023
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE
2	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR

RoHS / REACH / CE