


Datasheet

Fibre Optic Cable Assembly

RS Stock number 536-7409



Dimensions: (mm)

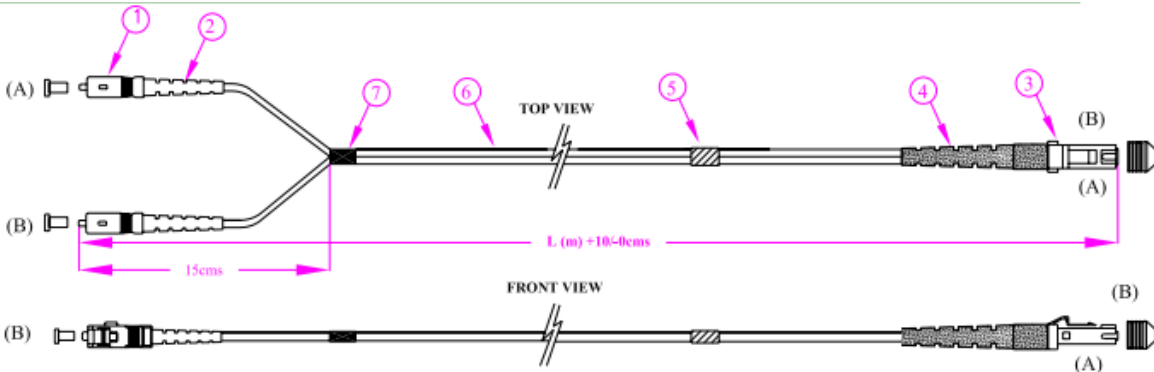

Id No.	Description	EA
1	SC Connector	2
2	SC Boots	2
3	MTJR Connector	1
4	MTJR Boot	1
5	Identification Label	1
6	1.6mm Duplex Cable	1
7	Black Tape	1

Optical Performance (IEC 61300-3-4):

Multimode (@ 1300nm)

MTRJ: Max. IL - 0.50dB Typical: 0.30dB

SC : Max. IL - 0.30dB Typical: 0.20dB

Singlemode (@1310nm and/or 1550nm)

MTRJ: Max. IL - 0.50dB Typical: 0.30dB

SC : Max. IL - 0.30dB Typical: 0.20dB

Return Loss: >40dB

Return Loss: >50dB

- RoHS compliant
- Coiling Diameter of the Patchcord shall be greater than 200mm.