




# Data sheet PTMTCA7

ENGLISH

RS Stock No. 8240672

RS Stock No. 8240672

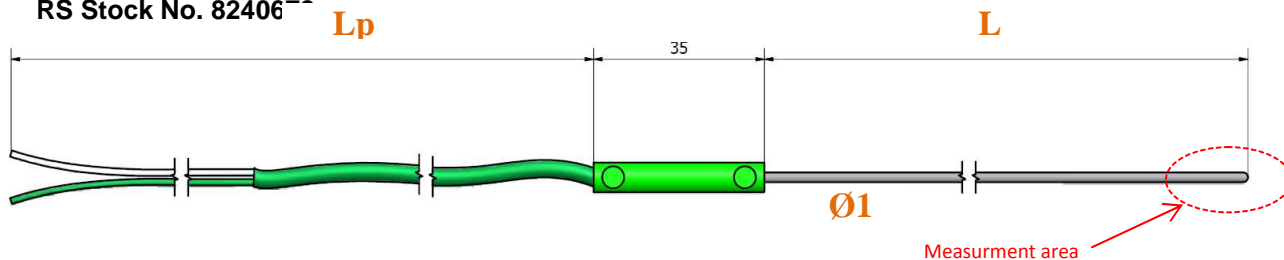

## THERMOCOUPLES SHEATHED WITH MINERAL INSULATION FLEXIBLE CABLE END

**RANGE :**

- 50°C / +1200°C

**USE :**

- Universal

**KEY POINT :**

- Economic

**SPECIFICATIONS :**

- Thermocouple K type (Chromel – Alumel)
- Hot junction ungrounded
- Sheath material: Alloy 600 for 1 and 1.5mm, 310SS for Ø 3 mm
- Cable insulation : PVC/PVC
- Mineral pressed insulation
- Bendable
- Overmould transition unanswerable, Ambiente temperature : -50°C/+100°C

**DIMENSIONS :**

- Sheath length - L = 2000mm
- Sheath diameter = - ØD = 1.5 mm
- Cable length = Lp (1 meter for Ø 1 and 1.5mm, 2 meters for Ø 3 mm)
- Transition housing = Ø 6 per length 35mm

**METROLOGICAL DATA :**

- As per IEC 584
- Standard tolerance TC "K" class 1 :*
- 40°C < t° < +375°C = ± 1,5°C
- 375°C < t° < +1000°C = ±0.004. [t]
- Time constant in water: Time constant in water: <5 s for Ø 3 mm, <2 s for Ø 1.5mm and 1mm
- Output signal FEM (mV) as per curve of "K" type as per norm

**Other dimensions:**

L \ ØD	100mm	150mm	250mm	500mm	1000mm	1500mm	2000mm
1mm	8240635	8240644	8240647	8240641	8240650	<del>XXXXXXXXXX</del>	<del>XXXXXXXXXX</del>
1,5mm	<del>XXXXXXXXXX</del>	8240653	8240657	8240666	8240669	8240663	8240672
3mm	<del>XXXXXXXXXX</del>	8240675	8240679	8240688	8240681	8240685	8240694