


## **FEATURES**

- Hot junction
  ungrounded
- Mineral insulation for durability and flexibility
- Flexible, can be bent into shape for easy installation
- Bendable
- Over mould transition unanswerable

# RS PRO Type K Thermocouple 250mm Length, 3mm Diameter $\rightarrow$ +1200°C

**RS Stock No.: 824-0679** 

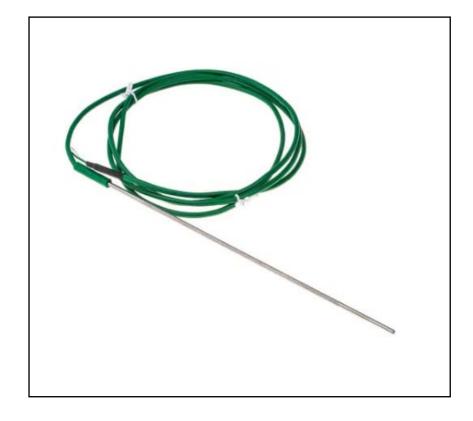

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



#### **Product Description**

From RS Pro a range of type K thermocouple temperature sensors or probes that conform to IEC 584 standards. These thermocouple temperature sensors have a durable construction and feature an Inconel Alloy 600 mineral insulated flexible sheath around the probe that can be bent and formed to suit a wide range of applications. The thermocouple has an ungrounded hot junction for a reduction in electrical interference

### **General Specifications**

Thermocouple Type	Туре К
Temperature Measurement Range	-50°C / 1200°C
Construction	Cable insulation(PVC)
Measuring Junction	Mineral pressed insulation
Accuracy	0.5°C to 5.0°C typical
Response Time	2.1s
Application	General purpose. High temperature Oxidizing environment, accurate and flexible with a wide temperature range, thermocouple probes include heat exchangers, power stations, brick and cement kilns, heat treatment and annealing furnaces, thermostats, food thermometers, vehicle diagnostics and in laboratories


#### **Mechanical Specifications**

Probe Diameter	3mm
Probe Length	250mm
Probe Body Material	Inconel 600, Stainless Steel
Process Connection	Sheath material: Alloy 600 for 1 and 1.5mm, 310SS for Ø 3 mm
Insulation / Sheath Material	Cable insulation PVC, Mineral pressed insulation
Termination Type	Cable
Compensating Cable Length	1m
Cable Insulation	PVC



Approvals

Compliance/Certifications	IEC 584
Standards Met	IEC584, RoHS Compliant

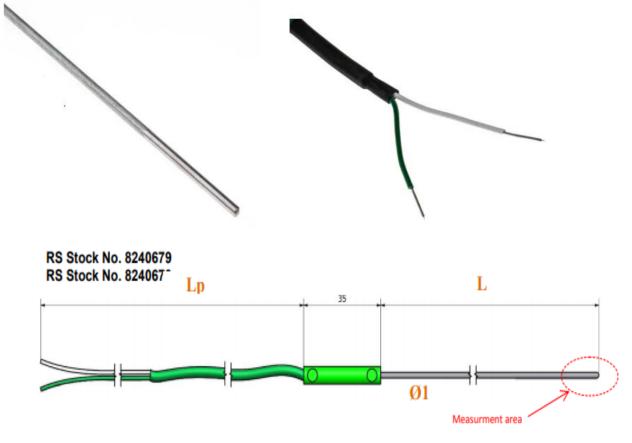

## Other dimensions:

ج ^	100mm	150mm	250mm	500mm	1000mm	1500mm	2000mm
1mm	8240635	8240644	8240647	8240641	8240650	$\times$	$\times$
1,5mm	$\times$	8240653	8240657	8240666	8240669	8240663	8240672
3mm	$\times$	8240675	8240679	8240688	8240681	8240685	8240694



T/C Type	Conductors	Length	Termination	+Positive tail wire	-Negative tail wire code	Allied Code	RS order Code
'K' 'K' 'K'	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Green Green Green Green	White White White White	70643600	363-0250 110-4482 123-6306 123-6307
97 97 97	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Black Black Black Black	White White White White	70643599	363-0244 123-6308 123-6309 123-6310
Ϋ́ Ψ΄ Τ΄ Τ΄	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Brown Brown Brown Brown	White White White White	70643601	363-0266 123-6311 123-6312 123-6313

	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order code
Compensating:						
VX (KCB)	7/0.2mm	+Green/-White	Green	10 metres	70657082	827-5609
VX (KCB)	7/0.2mm	+Green/-White	Green	25 metres	70641629	219-4551
VX (KCB)	7/0.2mm	+Green/-White	Green	50 metres	70657080	827-5603
VX (KCB)	7/0.2mm	+Green/-White	Green	100 metres	70641630	219-4573
VX (KCB)	7/0.2mm	+Green/-White	Green	200 metres	70657083	827-5612
VX (KCB)	13/0.2mm	+Green/-White	Green	10 metres	70657086	827-5621
VX (KCB)	13/0.2mm	+Green/-White	Green	25 metres	70657087	827-5625
VX (KCB)	13/0.2mm	+Green/-White	Green	50 metres	70657090	827-5634
VX (KCB)	13/0.2mm	+Green/-White	Green	100 metres	70651750	762-1152
U (RCA)	7/0.2mm	+Orange/-White	Orange	10 metres	70657096	827-5656
U (RCA)	7/0.2mm	+Orange/-White	Orange	25 metres	70646158	611-7902
U (RCA)	7/0.2mm	+Orange/-White	Orange	50 metres	70657097	827-5659
U (RCA)	13/0.2mm	+Orange/-White	Orange	10 metres	70641641	219-4769
U (RCA)	13/0.2mm	+Orange/-White	Orange	25 metres	70657093	827-5643
U (RCA)	13/0.2mm	+Orange/-White	Orange	50 metres	70657094	827-5647



	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order code
Extensio	on:					
KX	7/0.2mm	+Green/-White	Green	10 metres	70657084	827-5615
KX	7/0.2mm	+Green/-White	Green	25 metres	70641729	236-3820
KX	7/0.2mm	+Green/-White	Green	50 metres	70657085	827-5619
KX	7/0.2mm	+Green/-White	Green	100 metres	70646156	611-7889
KX	7/0.2mm	+Green/-White	Green	200 metres	70657088	827-5628
JX	7/0.2mm	+Black/-White	Black	10 metres	70641640	219-4753
JX	7/0.2mm	+Black/-White	Black	25 metres	70657078	827-5592
JX	7/0.2mm	+Black/-White	Black	50 metres	70657079	827-5596
JX	7/0.2mm	+Black/-White	Black	100 metres	70641737	236-3915
JX	7/0.2mm	+Black/-White	Black	200 metres	70657081	827-5606
ТΧ	7/0.2mm	+Brown/-White	Brown	10 metres	70641637	219-4703
ТΧ	7/0.2mm	+Brown/-White	Brown	25 metres	70641734	236-3870
ТΧ	7/0.2mm	+Brown/-White	Brown	50 metres	70657095	827-5653
ТΧ	7/0.2mm	+Brown/-White	Brown	100 metres	70651749	762-1146
ТΧ	7/0.2mm	+Brown/-White	Brown	200 metres	70657098	827-5662
NX	7/0.2mm	+Pink/-White	Pink	10 metres	70641635	219-4668
NX	7/0.2mm	+Pink/-White	Pink	25 metres	70657091	827-5637
NX	7/0.2mm	+Pink/-White	Pink	50 metres	70657089	827-5631
NX	7/0.2mm	+Pink/-White	Pink	100 metres	70657092	827-5640

Т/С Туре	Conductors	Cores	Jacket	Reel Length	Allied code	RS order code
Extension:						
KX	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656102	814-0018
KX	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656105	814-0027
KX	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656103	814-0020
XL	7/0.2mm	+ White/-Red	Black	25 m	70656096	813-9995
XL	7/0.2mm	+ White/-Red	Black	100 m	70656098	814-0005
XL	7/0.2mm	+ White/-Red	Black	200 m	70656099	814-0008
тх	7/0.2mm	+Blue/-Red	Blue	25 m	70656119	814-0074
ТХ	7/0.2mm	+Blue/-Red	Blue	100 m	70656122	814-0083
тх	7/0.2mm	+Blue/-Red	Blue	200 m	70656123	814-0086
Compensatin	ig:					
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656127	814-0103
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656130	814-0112
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656131	814-0115



<b>Т/С Туре</b>	<b>Conductors</b>	Cores	Reel Length	Allied code	RS order code
КХ	1/0.2mm	+Yellow/-Red	25 metres	70656106	814-0030
КХ	1/0.2mm	+Yellow/-Red	50 metres	70656111	814-0049
КХ	1/0.2mm	+Yellow/-Red	100 metres	70656109	814-0042
KX	7/0.2mm	+Yellow/-Red	25 metres	70656110	814-0046
KX	7/0.2mm	+Yellow/-Red	50 metres	70656113	814-0055
KX	7/0.2mm	+Yellow/-Red	100 metres	70656114	814-0058
KX	1/0.3mm	+Yellow/-Red	25 metres	70656104	814-0024
KX	1/0.3mm	+Yellow/-Red	50 metres	70656107	814-0033
KX	1/0.3mm	+Yellow/-Red	100 metres	70656108	814-0036
TX	1/0.3mm	+Blue/-Red	25 metres	70656121	814-0080
TX	1/0.3mm	+Blue/-Red	50 metres	70656126	814-0099
TX	1/0.3mm	+Blue/-Red	100 metres	70656124	814-0092
TX	1/0.2mm	+Blue/-Red	25 metres	70656125	814-0096
TX	1/0.2mm	+Blue/-Red	50 metres	70656128	814-0106
TX	1/0.2mm	+Blue/-Red	100 metres	70656129	814-0109

Т/С Туре	Conductors	Length	Termination	+Positive tail wire	-Negative tail wire code	Allied Code	RS order Code
'K'	1/0.2mm	1 metre	Mini plug	Green	White	70643600	363-0250
'K'	1/0.2mm	2 metre	Mini plug	Green	White		110-4482
'K'	1/0.2mm	5 metre	Mini plug	Green	White		123-6306
'K'	1/0.2mm	10 metre	Mini plug	Green	White		123-6307
97 97 97	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Black Black Black Black	White White White White	70643599	363-0244 123-6308 123-6309 123-6310
'T'	1/0.2mm	1 metre	Mini plug	Brown	White	70643601	363-0266
'T'	1/0.2mm	2 metre	Mini plug	Brown	White		123-6311
'T'	1/0.2mm	5 metre	Mini plug	Brown	White		123-6312
'T'	1/0.2mm	10 metre	Mini plug	Brown	White		123-6313