


NO	DESCRIPTION	DATE
①	ADD MIS PART NO.	04.01.04'
②	4724542 → 054-0037S-F P54-0037S-F → 054-0037S-F	01.02.07'
③	ADD DESCRIPTION MIS PART NO. → P/N 2.77±0.25 → 2.77±0.38 54.84 REF → 54.83±0.25 2.84±0.25 → 2.84±0.38 7.9 REF → 7.9±0.25 63.5 REF → 63.5±0.25 69.32 REF → 69.35±0.38 12.55±0.25 → 12.55±0.38 5.9 REF → 5.9±0.38 20.6 REF → 20.6±0.38	04.29.08'

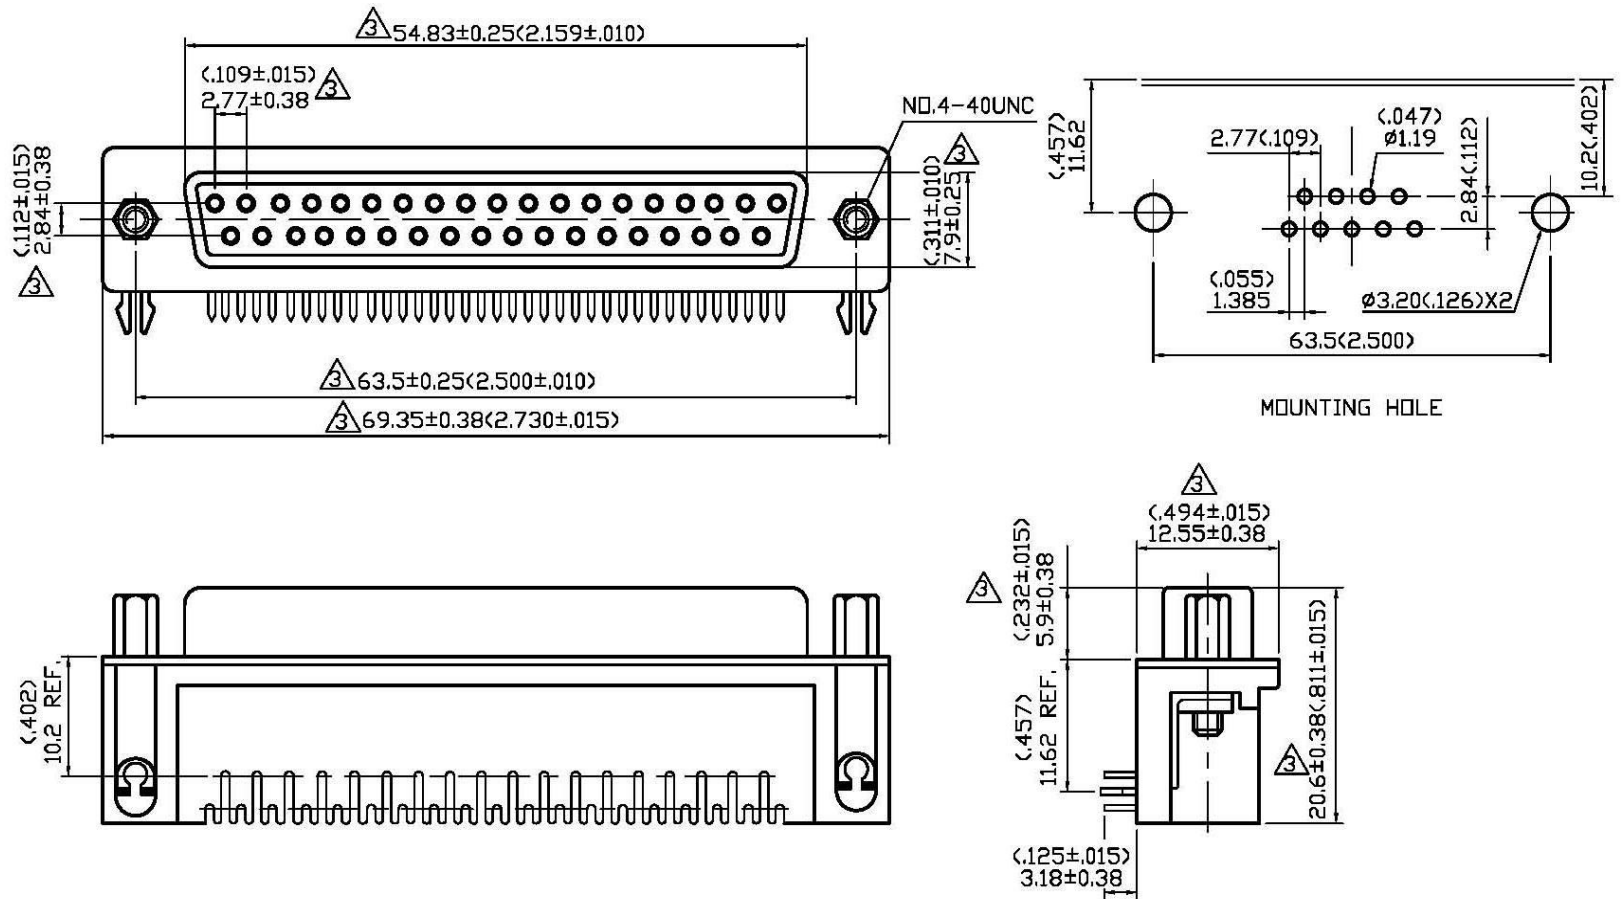

MOUNTING HOLE

①②③ P/N: 544-4017

MATERIAL:

INSULATOR: PBT+30% GLASS FIBER (UL 94V-0) BLACK.
CONTACT MATERIAL: BRASS.
CONTACT FINISH: GOLD OVER NICKEL.
SHELL FINSH: STEEL NICKEL PLATED.

SPECIFICATION:

CURRENT RATING: 5 AMP
DIELECTRIC WITHSTANDING VOLTAGE: 1000V PER MINUTE.
INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
CONTACT RESISTANCE: 15mΩ MAX. 10 SES.
OPERATING TEMPERATURE: -55°C-+105°C
MIS PART NO: P54-0037S-F

APPROVED by _____ DATE: _____



DESCRIPTION		D-SUB WITH 37-PIN FEMALE CONNECTOR BY FORMING	
製圖	DRAWN Yoko	TOLERANCE	品名 054-0037S-F ③ 37W RT/ANG GRD SKT
檢圖	CHECK Angela	單位	DATE 01.27.04
認定	APPROVAL Angela	比例	REV. A-3
		UNIT	DATE
		mm(in)	01.27.04
		SCALE	版次
		2:1	A-3
		DWG.NO.	55-0064