



Datasheet

RS PRO 45CM USB TO SERIAL ADAPTER – FTDI CHIPSET


Stock number: 2206494

EN

The RS PRO USB to serial adapter has an ABS shell on the DB 9-way male connection and a 45cm cable flex made from PVC to the USB A male connector.

It uses the popular FTDI chipset which windows will install the first time it is connected to a PC and has a transfer rate of up to 2400-115200bps.

Serial to USB adapters are used to connect serial devices to PC's which only have a USB port.

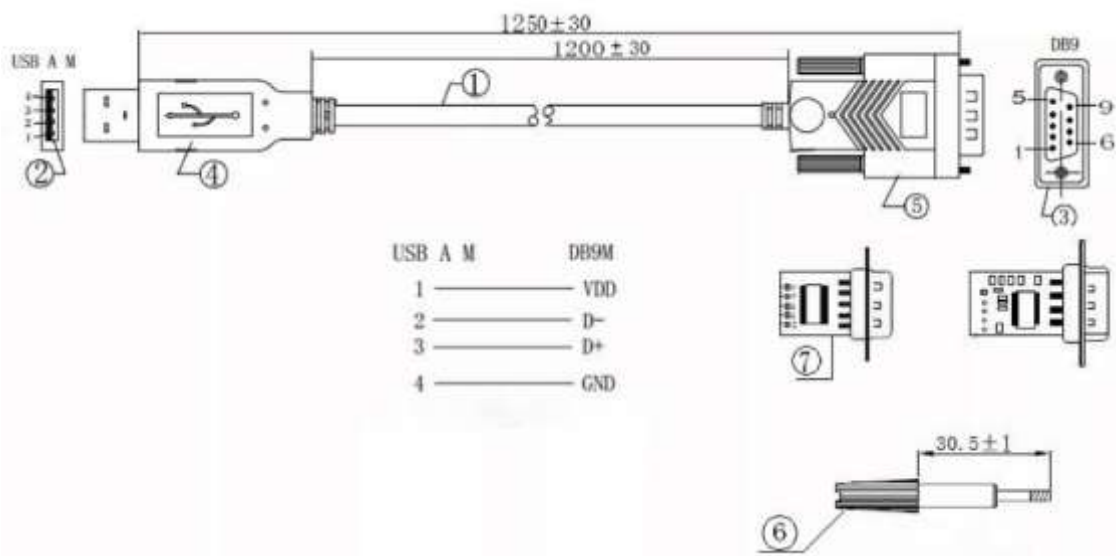

1	OD4.5 (7/0.12) *2C+ (11/0.16) *2C+AL+64B
2	2.0USB
3	DB9PIN
4	45P PVC
5	45P PVC
6	4*47
7	DB9 PCB (FT232RL+2T213LEE)

RoHS / REACH / CE

rspro.com